

METRIC 2402 SF SERIES FLOATING INSERT, SNAP-IN HEAD STYLE

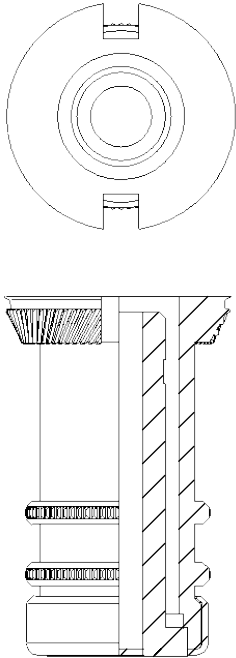


TABLE I

CODE	T THREAD	A DIA	B DIA	C DIA	INSTALLATION HOLE
M3	M3X.05	.531	.489	.323	.500-.505
M3.5	M3.5X.6	.531	.489	.323	.500-.505
M4	M4X.7	.593	.551	.323	.562-.567
M5	M5X.8	.593	.551	.323	.562-.567
M6	M6X1	.718	.676	.437	.687-.692
M8X1	M8X1	.843	.801	.437	.812-.817
M8X1.25	M8X1.25	.843	.801	.437	.812-.817
M10X1.25	M10X1.25	.968	.926	.515	.937-.942
M10X1.5	M10X1.5	.968	.926	.515	.937-.942

TABLE II

DASH NO.	SKIN THICKNESS "T"
-1	.010 - .019
-2	.020 - .029
-3	.030 - .039
-4	.040 - .049
-5	.050 - .059
-6	.060 - .069

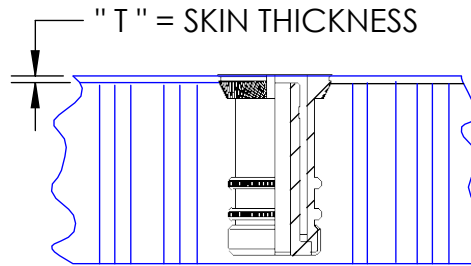


TABLE III (MINIMUM FULL THREAD)

LENGTH DASH NUMBER	L	THREAD SIZE						
		M3	M3.5	M4	M5	M6	M8	M10
-06	.335	.224	.276	.292	.292	-	-	-
-07	.395	.224	.276	.328	.350	.350	.350	.350
-08	.455	.224	.276	.328	.380	.410	.410	.410
-10	.565	.224	.276	.328	.380	.500	.520	.520
-12	.690	.224	.276	.328	.380	.500	.625	.645
-14	.812	.224	.276	.328	.380	.500	.625	.750
-16	.935	.224	.276	.328	.380	.500	.625	.750