



Engineering and Manufacturing

*High Performance Fasteners
and Hardware Products*

Manufactured in the USA



CAGE CODE: 0JHK5

WITTEN COMPANY, INC.

8199 N 116TH E AVE
PO BOX 269
OWASSO, OK 74055

Phone: 918-272-9567
Fax: 918-272-9411
E-mail: info@wittenco.com



www.wittenco.com

COMMITMENT TO QUALITY

“Witten Company, Inc is continually improving our products and exceeding customer satisfaction through a tradition of quality excellence.” We are ISO9001 certified, AS9100 certified, QSLM Class 2&3 certified and a preferred supplier of several companies.

All of our manufacturing is performed in-house (In the USA!) to maintain high quality control standards.

STATE-OF-THE-ART MANUFACTURING

Our state-of-the-art manufacturing facility is committed to meeting your production requirements. CNC turning & CNC milling are manufacturing processes that are used on a majority of our products.

We have the capability of manufacturing our fasteners from aluminum, brass, carbon steel, stainless steel and other alloy steels. We also manufacture non-metallic

RESEARCH, DEVELOPMENT & ENGINEERING

We are an engineering and manufacturing company specializing in fastening devices for composite structures. Witten Company, Inc. has been performing research, development, engineering and manufacturing of fasteners for the composite industry for over 31 years.

Our engineering team is constantly working on new challenges and concepts to meet the needs and requirements of our customers. Our engineers will work with the customer to provide a conceptual design and prototypes for testing and evaluation to meet the necessary requirements. We are dedicated to serving your needs and providing practical solutions for your fastening applications. Witten Fasteners are utilized on a variety of products ranging from electric buses to jet aircraft engines.



CUSTOMER SERVICE

We strive to keep a large inventory of fasteners available for immediate shipment, as well as “Just-In-Time” deliveries for annual procurements. Our customer service department can provide prompt quotations for all of your fastener requirements.

KEY PRODUCTS

- High-Performance Threaded Inserts
- Thru-Hole Inserts
- NAS Panel Fasteners
- MS Fasteners
- Spacers
- Sleeves
- Two-piece Inserts
- Floating Inserts

Phone: 918-272-9567
Fax: 918-272-9411
E-mail: info@wittenco.com
<http://www.wittenco.com>
HubZone Certified
CAGE CODE: 0JHK5

Witten Company, Inc.
8199 N. 116th E. Ave.
PO Box 269
Owasso, OK 74055

WITTEN CROSS-REFERENCE LIST

Tuesday, April 28, 2026



| WITTEN | STANDARDS/ OTHER | SHUR-LOK | YOUNG ENGINEERS | ALCOA/TRIDAIR | DESCRIPTION |
|---|--|---|---|--|---|
| 120 | | | | | THREADED, BLIND, LIGHT DUTY – PRESS IN |
| 121 | | | | | THREADED, BLIND, FLANGED HEAD, LIGHT DUTY – PRESS IN |
| 130 130 METRIC | | | | | THREADED, BLIND, REGULAR HEAD, MEDIUM DUTY |
| 140 | | | | | THREADED, BLIND, REGULAR HEAD MEDIUM DUTY |
| 141 | 17-1-5540 (NATICK) 17-1-6655 (NATICK) | | | | THREADED, BLIND, SNAP-IN, MEDIUM DUTY |
| 150 150 METRIC | | | | | THREADED, BLIND, REGULAR HEAD, HEAVY DUTY, SPIRAL RIB |
| 151 151 METRIC | 17-1-4718 (NATICK) | | | | THREADED, BLIND, SNAP-IN, HEAVY DUTY, SPIRAL RIB |
| 155 | | | | | FLOATING INSERT |
| 250 | | | | | HEAVY DUTY, POTTED STUD, SPIRAL RIB |
| 352 | | | | | THRU-HOLE SLEEVE, PROTRUDING |
| 354 | | | | | THRU HOLE, THREADED WITH SINGLE FLANGE |
| 355 355 METRIC | | | | | THRU HOLE, THREADED WITH SINGLE FLANGE |
| 2004 2004 METRIC | | | | | MOLDED OR POTTED IN, THRU HOLE, SPIRAL RIB |
| 2005 | | | | | THRU HOLE, FLANGE, SPIRAL RIB |
| 2235 | 17-1-6611 (NATICK) AK515 (AVIBANK) | | | | POTTED RIVET NUT |
| 2253H 2253HE | | | TYE1400 TYE1400H | 400H SERIES 400HE SERIES | POTTED-IN BLIND THREADED |
| 2253S 2253SE | 17-1-6655 (NATICK) | | | 400S SERIES 400SE SERIES | BLIND, SNAP-IN, THREADED |
| 2395 | | | TYE2161 | | |
| 2402 W2334 | CDSP5907 | SL618 SL2334 | TYE2018 TYE2334 | D137HF SERIES D147HF SERIES | MOLDED IN, BLIND, THREAD, FLOATING |
| 2402SF | | | TYE3006 TYE3600 | 400SF SERIES 400HF SERIES | FLOATING, SNAP-IN HEAD |
| 2402SF METRIC | | | | | |
| W101 W102 W103 W103 THIN W104 W104 THIN W106 W106 THIN 2445 | GAS501A SERIES | SL101 SL102 SL103 SL104 SL106 SL5182 | TYE101 TYE102 TYE103 TYE104 TYE106 TYE5182 | 101 SERIES 102 SERIES 103 SERIES 104 SERIES 106 SERIES | GROMMET TYPE, THRU RIVET GROMMET TYPE, THRU BOLT GROMMET TYPE, THREADED GROMMET TYPE THREADED, THIN GROMMET TYPE, THREADED, LOCK GROMMET TYPE, THREADED, LOCK, THIN GROMMET TYPE, THREADED, SELF LOCK, HELICAL GROMMET TYPE, THREADED, SLEF LOCK, HELICAL, THIN |
| W2444 | | SL6288 | TYE2050 | | |
| W719 | CDIN13 (C&D ZODIAC) | SL2748 SL2899 | TYE2048 | | |
| W715 | CDIN15 CDSP5906 | SL2868 | TYE2068 | | POTTED IN, THROUGH THREADED, DOUBLE LOCK |

WITTEN CROSS-REFERENCE LIST

Tuesday, April 28, 2026



| WITTEN | STANDARDS/ OTHER | SHUR-LOK | YOUNG ENGINEERS | ALCOA/TRIDAIR | DESCRIPTION |
|--|---|---|-------------------------------|-------------------------------|--|
| 2487 | | SL2808 SL2668 | | | |
| 2491 | | SL5107 | TYE5107 | | |
| W2494 | CDIN12 | SL644 | TYE2044 | | BLIND, THREADED, LIGHTWEIGHT |
| 2497 | | SL6096 | TYE2046 | | |
| 2507 | | SL2899 | | | INSERT, BLIND THREADED, LIGHTWEIGHT |
| 2517 | CDIN16 (C&D ZODIAC) | SL10631 | TYE2069 | | POTTED IN, THROUGH THREADED, COUNTERSUNK, DOUBLE LOCK |
| NA0241 | | | | | |
| NA0242 | | | | | |
| NA0243 | | | | | |
| NA0244 | | | | | |
| NA0245 | | | | | |
| NAS1056 | NAS1056 SERIES | | | | |
| NAS1057 | NAS1057 SERIES | | | | |
| NAS1832 W1832 | NAS1832 SERIES CDIN08 (C&D ZODIAC) | SL601 | TYE2002 | D1832 SERIES | MOLDED IN, BLIND, THREADED |
| NAS1833 180 180 METRIC | NAS1833 SERIES CDIN09 (C&D ZODIAC) | SL602 | TYE2007 | D1833 SERIES | THREADED, THRU, REGULAR HEAD |
| NAS1834 NAS1834K 181 181 METRIC | NAS1834 SERIES CDSP5904 (C&D ZODIAC) CDSP5903 (C&D ZODIAC) | SL603 SL604 SL604 | TYE2003 TYE2004 TYE4004 | D1834 SERIES D1834K SERIES | POTTED IN, THRU CLEARANCE HOLE, REGULAR HEAD STYLE |
| NAS1835 W1835 | NAS1835 SERIES | SL606 | TYE1835 | D1835 SERIES | MOLDED IN, BLIND THREADED, FLOATING |
| NAS1836 W1836 | NAS1836 SERIES CDIN07 (C&D ZODIAC) | SL607 | TYE2001 | D1836 SERIES | MOLDED IN, BLIND, THREADED, LIGHTWEIGHT |
| WBN360 | BN360 (LISI AEROSPACE) 3264499 (RAYTHEON) 11438039 (RAYTHEON) VALA2B5 (WEST COAST) | EXCLUSIVELY DISTRIBUTED BY ENFASCO, INC. www.enfasco.com sales@enfasco.com | | | BLIND NUT ASSEMBLY, COUNTERSUNK, SHALLOW HEAD |
| WBN388 | BN388 (LISI AEROSPACE) 10274114 (RAYTHEON) VALA2B6 (WEST COAST) | | | | BLIND NUT ASSEMBLY, COUNTERSUNK, SHALLOW HEAD, DOME TYPE, CLOSED END |
| WBN566 | BN566 (LISI AEROSPACE) | | | | BLIND NUT ASSEMBLY, COUNTERSUNK, SHALLOW HEAD |
| W704 | CDIN11 (C&D ZODIAC) | SL6089 | TYE2043 | | POTTED IN, THROUGH HOLE, LIGHT WEIGHT |
| W708 | CDSP5905 (C&D ZODIAC) | SL6520 | TYE2161 | | BLIND, THRADED, COUNTERSUNK |
| 2007 | NAS1837 | | | | PLASTIC INSTALLATION TAB |




▶ Fastener Applications

| | | | |
|------------------------|-------------------|---------------------|--------------------------|
| Ground Support Equip. | RPV's | Galleys | Prosthetics |
| Aircraft Interiors | Cargo Pallets | Floor Panels | All Composite Structures |
| Partitions | Flight Simulators | Ships | Aerospace |
| Military Shelters | Bulkheads | Railcars | Satellite Receivers |
| Recreation Equipment | Military Vehicles | Fiberglass Products | Race Cars |
| Electronic Cabinetry | Automobiles | Snowmobiles | Boats |
| Flight Control Surface | Helicopters | UAV | Trucks |

▶ Fastener Products

| | | | |
|-------------------------|-------------------|---------------------------|------------------|
| Blind, Threaded Inserts | Thru-Hole Inserts | Flanged-Head Inserts | Spacers |
| | Hardpoints | Internal/External Threads | Knurled Bushings |
| Two-piece Inserts | Grommets | Core Bushings | NAS Equivalent |
| Floating Inserts | | Press-In Inserts | Panel Thru-hole |
| Press In Stud | Receptacles | Plug/Sleeve-Type Insert | Sleeves |

▶ Light Duty Fasteners




120 Series, Blind, Press-In/Molded-In

One piece blind threaded fastener to be pressed/molded into any honeycomb or composite panel. A diamond knurl provides both torque out and pullout capability. Can be installed with or without epoxy adhesive.



121 Series, Blind, Press-In/Molded-In

One piece blind threaded fastener similar to the 120 series but with a flanged head which provides bearing surface for the composite panel.



130 Series, Blind, Molded/Potted In

One piece blind threaded fastener to be molded-in/potted into honeycomb panels or other composite panels. The anti-rotational flats provide torque out capability. Potting/vent holes are optional and self-locking features are optional. Installation tabs are provided for potted-in installations.

▶ Medium Duty Fasteners




140 Series, Blind, Molded/Potted-In

One piece blind threaded fastener to be molded-in/potted into honeycomb panels or other composite panels. An annular ring around the body of the insert and longitudinal slots provide pull-out and torque-out capability. Potting/vent holes are standard and self-locking features are optional. Installation tabs are provided for potted-in installation.



141 Series, Blind, Potted Inserts, Snap-In Type


One piece blind threaded fastener similar to the 140 series but with a groove that allows the fastener to snap into the top skin for retention during potting. Includes all features of the 140 series insert.



2253 S,SE Series, Blind, Potted Insert, Snap-In Type

One piece blind threaded fastener to be molded/potted into a honeycomb panel. An annular ring around the body and longitudinal slots provide pull-out and torque-out capability. A groove in the upper flange allows the fastener to snap into the top skin for retention during potting.

▶ **Heavy Duty Fasteners**




150 Series, “Spiral Rib” Blind, Molded/Potted Inserts

One piece blind threaded fastener to be molded-in/potted into honeycomb panels or other composite panels. The external spiral ribs provide maximum pull-out and torque-out strength. Potting/vent holes are standard and the self-locking features are optional. Minimum potting material is required. Installation tabs are provided for the potted-in installations. This is a “high performance” insert.




151 Series, “Spiral Rib” Blind, Potted Inserts, Snap-in Type

One piece blind threaded fastener similar to 150 series, but with a groove that allows the fastener to snap into the top skin for retention during potting. Includes all features of the 150 series insert. This is a “High performance” insert.



155 Series Inserts– Blind, Potted, Floating 1/32 Radial

This blind floating insert has a 1/32 radial float. These are commonly used when additional tolerances are required. This is a “high performance” insert.



156 Series Inserts– Potted, Quick Release Pin Receptacle

Quick release pin receptacle for ball-lock pin. Snap-in type with a groove allowing the receptacle to snap into the top skin for retention during potting. Typically, these are used in conjunction with a quick release pin to provide tie-downs, which can be removed very rapidly.



2004 Series Insert- “Spiral Rib”, Thru-hole, Threaded Insert

One-piece threaded thru-hole insert. Can be molded/potted-in flush mounted on both sides. External spiral ribs provide maximum pull-out and torque-out strength. Potting slots are optional. This is a “high performance” insert.

2005 Series Insert- “Spiral Rib”, Thru-hole, Threaded Insert with Flange


One-piece threaded thru-hole insert. Can be molded/potted-in, with flange bottom. External spiral ribs provide maximum pull-out and torque-out strength. Potting slots are optional. This is a “high performance” insert.

▶ **NAS Fasteners and NAS Equivalent**




180 Series, Thru-Hole Threaded Insert, Regular Head Style Molded/Potted-In (NAS1833 Equivalent)

One piece thru-hole threaded insert. Can be molded/potted-in. A straight knurl provides torque out capabilities. Potting/vent holes and/or self-locking features are optional. Installation tabs are provided for potted-in installations. (NAS1833 Equivalent)




181 Series, Thru-Hole Insert, Regular Head Style Molded/Potted-In (NAS1834 Equivalent)

One piece thru-hole insert. Can be molded/potted-in. A straight knurl provides torque out capabilities. Potting/vent holes are optional. Thru-hole countersunk on flange. Installation tabs are provided for potted-in installations. (NAS1834 Equivalent)




NAS1832 Series, Blind Threaded, Self Locking/Non-self Locking, Molded/Potted, Sandwich Panel Insert.

One piece blind threaded insert manufactured in accordance with the requirements of National Aerospace standard NAS1832. Anti-rotational flat on the lower flange provides torque out capability. Offered with or without self locking feature and in a variety of materials and finishes.




NAS1833 Series, Thru Hole, Threaded, Self-Locking/Non-self Locking, Molded/Potted, Sandwich Panel Insert.

One piece thru hole threaded insert manufactured in accordance with the requirements of National Aerospace Standard NAS1833. Anti-rotational knurl on the insert body provides torque out capability. Offered with or without self locking feature and in a variety of materials and finishes.



NAS1834 Series, Thru Clearance Hole, Countersunk/Flush, Molded/Potted, Sandwich Panel Insert.


One piece thru clearance hole insert manufactured in accordance with the requirements of National Aerospace standard NAS1834. Anti-rotational knurl on the insert body provides torque out capability. Offered in a variety of materials and finishes.



NAS1835 Series, Blind Threaded, Self Locking/Non-self Locking, Molded/Potted, Floating Sandwich Panel Insert.

Floating insert with a 1/32" radial float. These inserts are commonly used when additional tolerances are required. Anti-rotational knurl on the insert body provides torque out capability. Offered in a variety of materials and finish combinations. Manufactured in accordance with the requirements of National Aerospace Standard NAS1835.

▶ **NAS Fasteners and NAS Equivalent continued**



NAS 1836 Series, Blind Threaded, Self Locking/Non-self Locking, Molded/Potted, Lightweight, Sandwich Panel Insert.


One piece blind threaded insert intended for use in thin sandwich panels. Manufactured in accordance with the requirements of National Aerospace Standard NAS1832. Anti-rotational flat on the lower flange provides torque out capability. Offered with or without self locking feature and in a variety of materials and finishes.

▶ **Other Industrial Hardware Products**




2235 Series, Potted Rivet Nut, Blind Insert

This closed end insert provides excellent torque and pull out loads. The insert is inserted in an epoxy filled cavity in the honeycomb panel and pulled much like a pop-rivet using a pneumatic or manual installation tool. A variety of thread sizes and lengths are available.



352 Series, Thru-Hole Sleeve, Protruding, Molded/Potted-In

One piece thru-hole sleeve fastener allowing a bolt to pass thru panel with a flange head for increased compression loading. Potting holes are optional. Installation tabs are provided for potted-in installations.




354 Series, Thru-Hole Threaded Insert with Flange, Molded/Potted

One piece threaded sleeve, allowing a bolt to pass thru panel with a flange head for increased compression loading. Potting holes are optional. Installation tabs are provided for potted-in installations.



355 Series, Thru-Hole Threaded Insert with Flange, Molded/Potted

One piece thru-hole threaded insert with flange. A straight knurl provides torque out capabilities. Potting holes are optional. Installation tabs are provided for potted-in installations.



2402SF Series, Blind, Potted, Floating 1/32" Radial Snap-In Style

This style insert is commonly used when additional tolerances are required. Center knurled flange offers increased rotational and pull out resistance. A variety of materials and finishes are available.

WITTEN FASTENERS

120 SERIES

THREADED INSERT, BLIND, REGULAR HEAD STYLE

LIGHT DUTY - PRESS IN

TABLE I

| CODE NO. | T THREAD | A DIA +.005/- .000 | INSTL HOLE +.005/- .000 |
|----------|-------------|-----------------------|----------------------------|
| 632 | 6-32 UNC | .245 | .250 |
| 832 | 8-32 UNC | .245 | .250 |
| 1032 | 10-32 UNF | .307 | .312 |
| 420 | 1/4-20 UNC | .370 | .375 |
| 428 | 1/4-28 UNF | .370 | .375 |
| 518 | 5/16-18 UNC | .432 | .437 |
| 524 | 5/16-24 UNF | .432 | .437 |
| 616 | 3/8-16 UNC | .495 | .500 |
| 624 | 3/8-24 UNF | .495 | .500 |


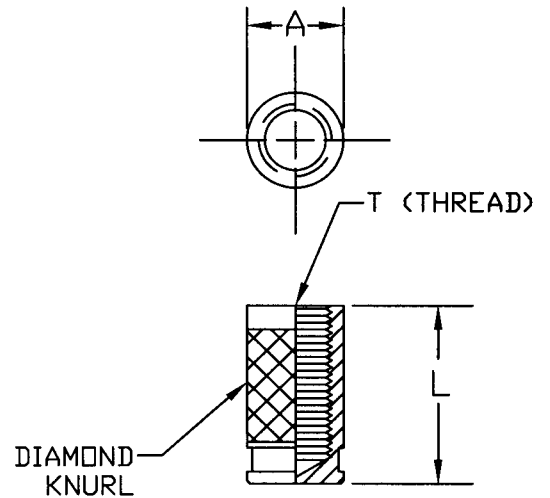


TABLE II

| DASH NO. | L ±.03 LENGTH | MINIMUM FULL THREAD DEPTH | | | | | |
|----------|---------------|---------------------------|------|------|------|------|------|
| | | #6 | #8 | #10 | 1/4 | 5/16 | 3/8 |
| -6 | .375 | .225 | .225 | .175 | -- | -- | -- |
| -7 | .437 | .276 | .287 | .237 | -- | -- | -- |
| -8 | .500 | .276 | .328 | .300 | .225 | -- | -- |
| -10 | .625 | .276 | .328 | .375 | .350 | .350 | .350 |
| -12 | .750 | .276 | .328 | .375 | .475 | .475 | .475 |
| -14 | .875 | .276 | .328 | .375 | .500 | .600 | .600 |
| -16 | 1.000 | .276 | .328 | .375 | .500 | .625 | .725 |

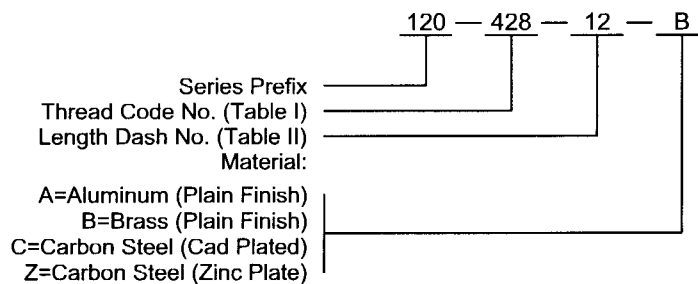EXAMPLE: PART NUMBERING SYSTEM



WITTEN FASTENERS

121 SERIES

THREADED INSERT, BLIND, FLANGED HEAD STYLE
LIGHT DUTY - PRESS IN

TABLE I

| CODE NO. | T THREAD | A DIA +.005/-.000 | B DIA | INSTL HOLE +.005/-.000 |
|----------|-------------|----------------------|-------|---------------------------|
| 632 | 6-32 UNC | .245 | .375 | .250 |
| 832 | 8-32 UNC | .245 | .375 | .250 |
| 1032 | 10-32 UNF | .307 | .437 | .312 |
| 420 | 1/4-20 UNC | .370 | .500 | .375 |
| 428 | 1/4-28 UNF | .370 | .500 | .375 |
| 518 | 5/16-18 UNC | .432 | .562 | .437 |
| 524 | 5/16-24 UNF | .432 | .562 | .437 |
| 616 | 3/8-16 UNC | .495 | .625 | .500 |
| 624 | 3/8-24 UNF | .495 | .625 | .500 |


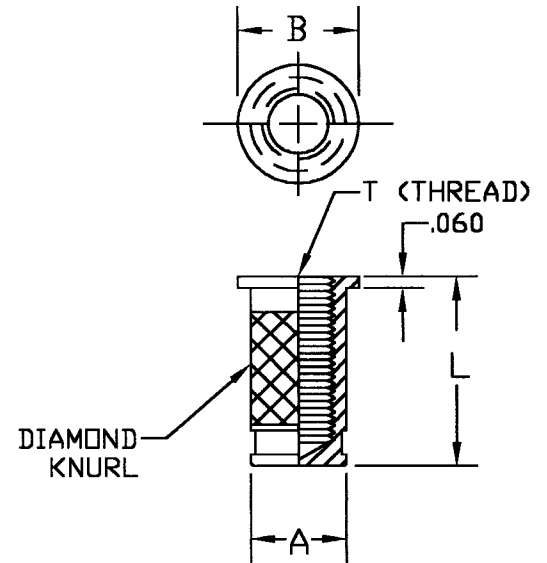


TABLE II



| DASH NO. | L ±.03 LENGTH | MINIMUM FULL THREAD DEPTH | | | | | |
|----------|---------------|---------------------------|------|------|------|------|------|
| | | #6 | #8 | #10 | 1/4 | 5/16 | 3/8 |
| -6 | .375 | .225 | .225 | .175 | -- | -- | -- |
| -7 | .437 | .276 | .287 | .237 | -- | -- | -- |
| -8 | .500 | .276 | .328 | .300 | .225 | -- | -- |
| -10 | .625 | .276 | .328 | .375 | .350 | .350 | .350 |
| -12 | .750 | .276 | .328 | .375 | .475 | .475 | .475 |
| -14 | .875 | .276 | .328 | .375 | .500 | .600 | .600 |
| -16 | 1.000 | .276 | .328 | .375 | .500 | .625 | .725 |

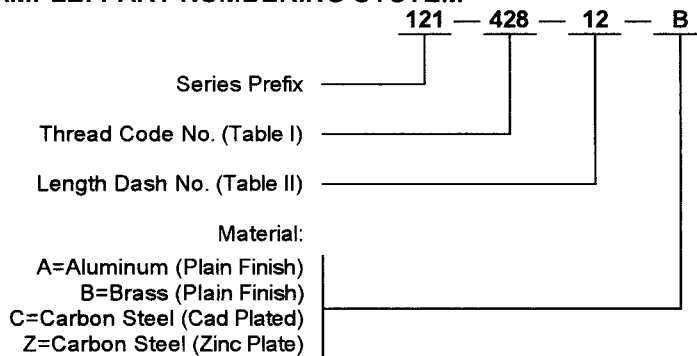EXAMPLE: PART NUMBERING SYSTEM



130 SERIES
 THREADED INSERT, BLIND, REGULAR HEAD STYLE
 MEDIUM DUTY

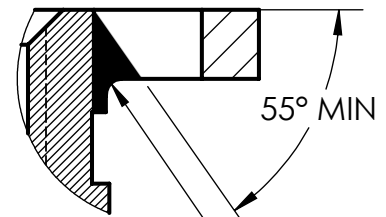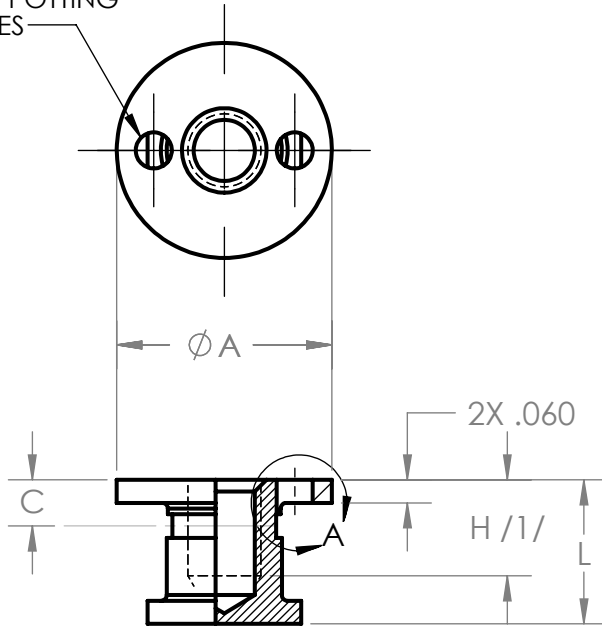
2X \varnothing .092 - .097 POTTING
 AND VENT HOLES




CONFIGURATION
 WITHIN THIS
 AREA MFG
 OPTION

DETAIL A
 FOR OPTIONAL CONFIGURATION
 TYPICAL FOR ALL STYLES

ANTIROTATION FLATS



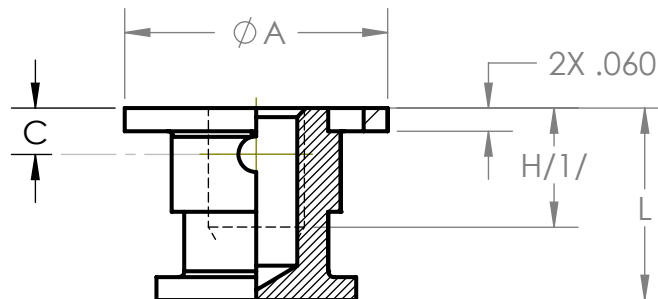ALL STEEL AND CRES LOCKING AND NON-LOCKING OR NON-LOCKING ALUMINUM STYLE



ALUMINUM LOCKING STYLE OR ALTERNATE NON-LOCKING ALUMINUM STYLE

WITTEN COMPANY
 918-272-9567

APPROVAL DATE: REV:A 4/21/2022

CAGE CODE: 0JHK5

130 SERIES THREADED INSERT, BLIND, REGULAR HEAD STYLE MEDIUM DUTY

TABLE I - DIMENSIONS

| SIZE DASH NO | T THREAD | ØA +.000 -.010 | C SELF-LK ±.06 | H MIN /1/ | L MIN | IN STL HOLE +.005/ -.000 |
|--------------|-----------------|----------------------|----------------------|-----------------|----------|-----------------------------------|
| 632 | 6-32 UNJC -3B | .577 | .12 | .25 | .37 | .578 |
| 832 | 8-32 UNJC -3B | .577 | .12 | .25 | .37 | .578 |
| 1032 | 10-32 UNJF - 3B | .577 | .12 | .25 | .37 | .578 |
| 420 | 1/4-20 UNJC-3B | .685 | .16 | .31 | .50 | .686 |
| 428 | 1/4-28 UNJF-3B | .685 | .16 | .31 | .50 | .686 |
| 518 | 5/16-18 UNJC-3B | .685 | .20 | .31 | .50 | .686 |
| 524 | 5/16-24 UNJF-3B | .685 | .20 | .31 | .50 | .686 |
| 616 | 3/8-16 UNJC-3B | .811 | .20 | .37 | .50 | .812 |
| 624 | 3/8-24 UNJF-3B | .811 | .20 | .37 | .50 | .812 |

TABLE II

| DASH NO. | L±.010 LENGTH | MINIMUM FULL THREAD DEPTH | | | | | |
|----------|---------------|---------------------------|------|------|------|------|------|
| | | #6 | #8 | #10 | 1/4 | 5/16 | 3/8 |
| -6 | .375 | .225 | .225 | .175 | - | - | - |
| -7 | .437 | .276 | .287 | .237 | - | - | - |
| -8 | .500 | .276 | .328 | .300 | .225 | - | - |
| -10 | .625 | .276 | .328 | .375 | .350 | .350 | .350 |
| -12 | .750 | .276 | .328 | .375 | .475 | .475 | .475 |
| -14 | .875 | .276 | .328 | .375 | .500 | .600 | .600 |
| -16 | 1.000 | .276 | .328 | .375 | .500 | .625 | .725 |

CODE:

130 - 428 - L - 12 - SS

MATERIAL & FINISH:
 A = ALUM ALLOY (CHEM FILM FINISH, CL 1A)
 A3 = ALUM ALLOY (CHEM FILM FINISH, CL 3)
 C = CARBON STEEL (CAD PLATE FINISH)
 Z = CARBON STEEL (ZINC PLATE)
 SS = STAINLESS STEEL (PLAIN FINISH)
 SP = STAINLESS STEEL (PASSIVATE)

LENGTH DASH NO. (TABLE II)

ADD "LK" FOR SELF-LOCK (NYLON)
 ADD "L" FOR SELF-LOCK (METALLIC CRIMP)

THREAD CODE NO. (TABLE I)

SERIES PREFIX

MATERIAL:

CARBON STEEL: PER ASTM A108.

AL ALLOY: GRADE 2024 (UNS A92024), TEMPER T4 OR T351 PER AMS-QQ-A-225/6.

CRES: TYPE 303 (UNS S30300) PER ASTM A582/A582M.

FINISH:

CARBON STEEL: CADMIUM PLATE PER AMS QQ-P-416, TYPE II, CLASS 2.
 ZINC PLATE PER ASTM-B633, SC2, TYPE I.

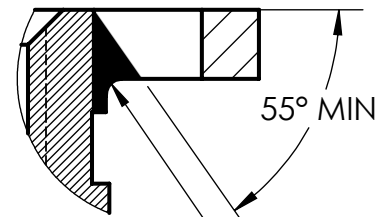
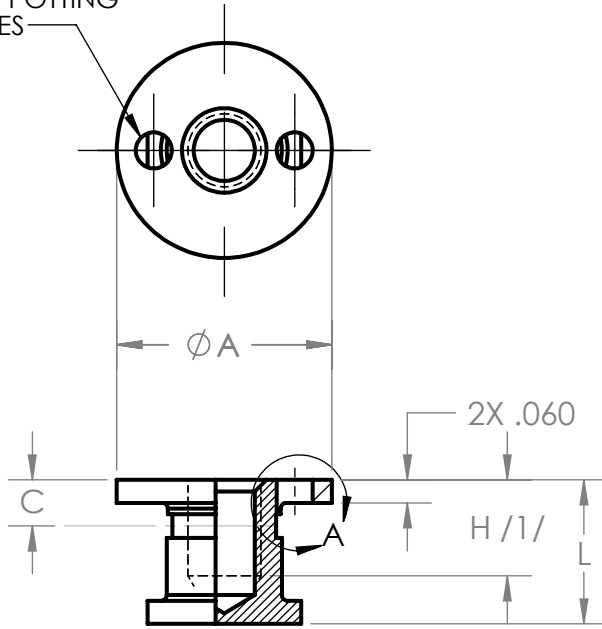
AL ALLOY: CHEM-FILM PER MIL-DTL-5541F, CLASS 1A.
 CHEM-FILM PER MIL-DTL-5541F, CLASS 3.

CRES: PASSIVATE PER ASTM-A967, CITRIC 1.

- NOTES:**
 1. MINIMUM THREAD DEPTH "H" WHERE LENGTH PERMITS SHALL BE 2X DIAMETER OF THREAD.
 2. THREADS PER AS8879, CLASS 3B.
 3. INSTALLATION TABS ARE INCLUDED.

METRIC 130 SERIES
 THREADED INSERT, BLIND, REGULAR HEAD STYLE
 MEDIUM DUTY


2X \varnothing .092 - .097 POTTING
 AND VENT HOLES




CONFIGURATION
 WITHIN THIS
 AREA MFG
 OPTION

DETAIL A
 FOR OPTIONAL CONFIGURATION
 TYPICAL FOR ALL STYLES

ANTIROTATION FLATS



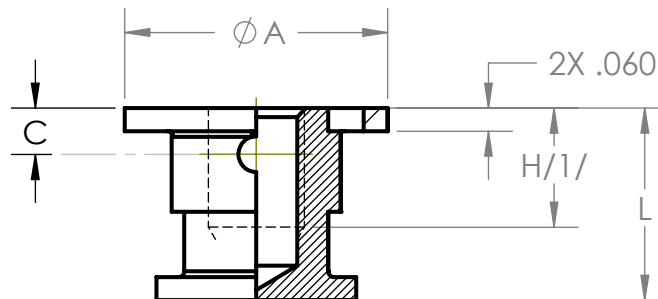ALL STEEL AND CRES LOCKING AND NON-LOCKING OR NON-LOCKING ALUMINUM STYLE



ALUMINUM LOCKING STYLE OR ALTERNATE NON-LOCKING ALUMINUM STYLE

WITTEN COMPANY
 918-272-9567

APPROVAL DATE: REV:A 4/21/2022

CAGE CODE: 0JHK5

METRIC 130 SERIES THREADED INSERT, BLIND, REGULAR HEAD STYLE MEDIUM DUTY

TABLE I - DIMENSIONS

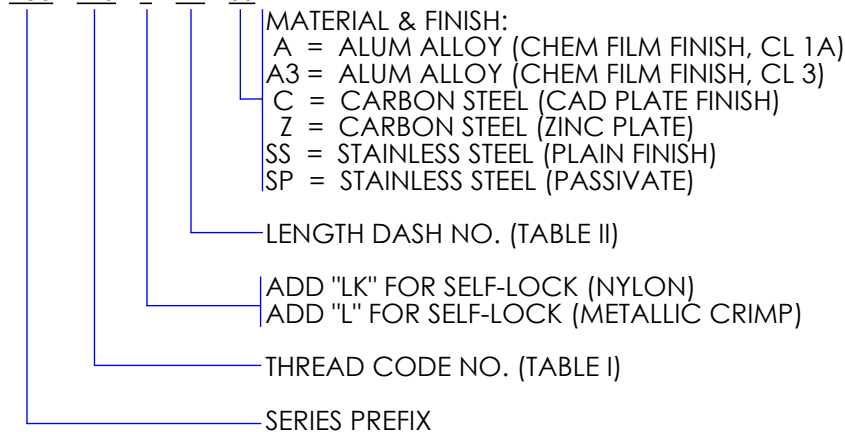
| SIZE DASH NO | T THREAD | ØA +.000 -.010 | C SELF-LK ±.06 | H MIN /1/ | L MIN | INSTR HOLE +.005/ -.000 |
|-----------------|-------------|----------------------|----------------------|-----------------|----------|----------------------------------|
| M3 | M3X.5 | .577 | .12 | .25 | .37 | .578 |
| M3.5 | M3.5X.6 | .577 | .12 | .25 | .37 | .578 |
| M4 | M4X.7 | .577 | .12 | .25 | .37 | .578 |
| M5 | M5X.8 | .577 | .12 | .25 | .37 | .578 |
| M6 | M6X1 | .685 | .16 | .31 | .50 | .686 |
| M8X1 | M8X1 | .685 | .20 | .31 | .50 | .686 |
| M8X1.25 | M8X1.25 | .685 | .20 | .31 | .50 | .686 |
| M10X1.25 | M10X1.25 | .811 | .20 | .37 | .50 | .812 |
| M10X1.5 | M10X1.5 | .811 | .20 | .37 | .50 | .812 |

TABLE II

| DASH NO. | L±.010 LENGTH | MINIMUM FULL THREAD DEPTH | | | | | |
|-------------|------------------|---------------------------|------|------|------|------|------|
| | | M3.5 | M4 | M5 | M6 | M8 | M10 |
| -6 | .375 | .225 | .225 | .175 | - | - | - |
| -7 | .437 | .276 | .287 | .237 | - | - | - |
| -8 | .500 | .276 | .328 | .300 | .225 | - | - |
| -10 | .625 | .276 | .328 | .375 | .350 | .350 | .350 |
| -12 | .750 | .276 | .328 | .375 | .475 | .475 | .475 |
| -14 | .875 | .276 | .328 | .375 | .500 | .600 | .600 |
| -16 | 1.000 | .276 | .328 | .375 | .500 | .625 | .725 |

CODE:

130 - M6 - L - 12 - SS


MATERIAL:

CARBON STEEL: PER ASTM A108.

AL ALLOY:

GRADE 2024 (UNS A92024), TEMPER T4 OR T351 PER AMS-QQ-A-225/6.

CRES:

TYPE 303 (UNS S30300) PER ASTM A582/A582M.

FINISH:

CARBON STEEL:

 CADMIUM PLATE PER AMS QQ-P-416, TYPE II, CLASS 2.
 ZINC PLATE PER ASTM-B633, SC2, TYPE I.

AL ALLOY:

 CHEM-FILM PER MIL-DTL-5541F, CLASS 1A.
 CHEM-FILM PER MIL-DTL-5541F, CLASS 3.

CRES:

PASSIVATE PER ASTM-A967, CITRIC 1.

NOTES:

- 1/ MINIMUM THREAD DEPTH "H" WHERE LENGTH PERMITS SHALL BE 2X DIAMETER OF THREAD.
2. INSTALLATION TABS ARE INCLUDED.

WITTEN FASTENERS

140 SERIES THREADED INSERT, BLIND, REGULAR HEAD STYLE MEDIUM DUTY

TABLE I

| CODE NO. | T THREAD | A DIA ±.010 | B SELF-LK ±.06 | C DIA ±.010 | INSTR HOLE +.010/-0.000 |
|----------|-------------|-------------------|----------------------|-------------------|-------------------------------|
| 632 | 6-32 UNC | .490 | .12 | .460 | .500 |
| 832 | 8-32 UNC | .490 | .12 | .460 | .500 |
| 1032 | 10-32 UNF | .520 | .12 | .490 | .530 |
| 420 | 1/4-20 UNC | .583 | .16 | .553 | .593 |
| 428 | 1/4-28 UNF | .583 | .16 | .553 | .593 |
| 518 | 5/16-18 UNC | .646 | .20 | .616 | .656 |
| 524 | 5/16-24 UNF | .646 | .20 | .616 | .656 |
| 616 | 3/8-16 UNC | .708 | .20 | .678 | .718 |
| 624 | 3/8-24 UNF | .708 | .20 | .678 | .718 |


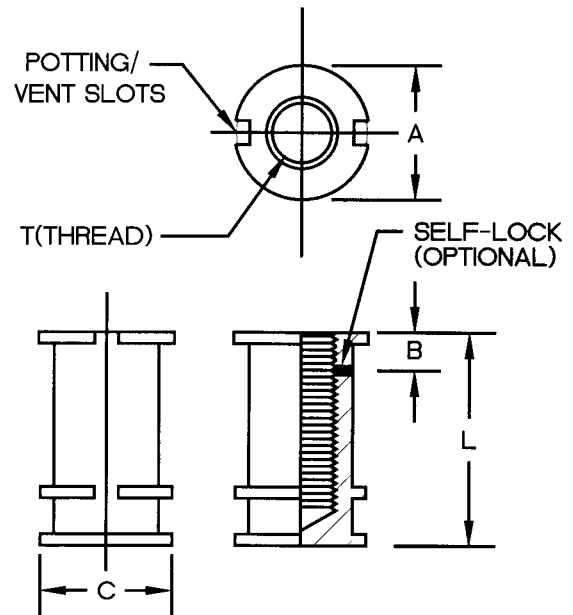


TABLE II

| DASH NO. | L ±.03 LENGTH | MINIMUM FULL THREAD DEPTH | | | | | |
|----------|------------------|---------------------------|------|------|------|------|------|
| | | #6 | #8 | #10 | 1/4 | 5/16 | 3/8 |
| -5 | .312 | .162 | .162 | -- | -- | -- | -- |
| -6 | .375 | .225 | .225 | .175 | -- | -- | -- |
| -7 | .437 | .276 | .287 | .237 | -- | -- | -- |
| -8 | .500 | .276 | .328 | .300 | .225 | -- | -- |
| -10 | .625 | .276 | .328 | .375 | .350 | .350 | .350 |
| -12 | .750 | .276 | .328 | .375 | .475 | .475 | .475 |
| -14 | .875 | .276 | .328 | .375 | .500 | .600 | .600 |
| -16 | 1.000 | .276 | .328 | .375 | .500 | .625 | .725 |
| -18 | 1.125 | .276 | .328 | .375 | .500 | .625 | .750 |

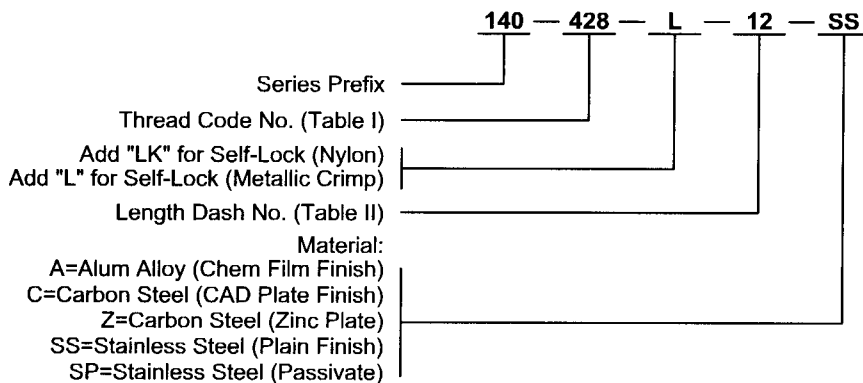EXAMPLE: PART NUMBERING SYSTEM



Notes:

1. Threads per MIL-S-7742
2. Installation tabs are available

141 SERIES

MOLDED/POTTED INSERTS, SNAP-IN TYPE

MEDIUM DUTY

TABLE I

| CODE NO. | T THREAD | A DIA ±.010 | B SELF-LK ±.06 | C DIA ±.010 | INSL HOLE +.010/-.000 |
|----------|-------------|-------------------|----------------------|-------------------|-----------------------------|
| 632 | 6-32 UNC | .500 | .12 | .427 | .468 |
| 832 | 8-32 UNC | .500 | .12 | .427 | .468 |
| 1032 | 10-32 UNF | .531 | .12 | .458 | .500 |
| 420 | 1/4-20 UNC | .594 | .16 | .521 | .562 |
| 428 | 1/4-28 UNF | .594 | .16 | .521 | .562 |
| 518 | 5/16-18 UNC | .656 | .20 | .583 | .625 |
| 524 | 5/16-24 UNF | .656 | .20 | .583 | .625 |
| 616 | 3/8-16 UNC | .719 | .20 | .646 | .687 |
| 624 | 3/8-24 UNF | .719 | .20 | .646 | .687 |

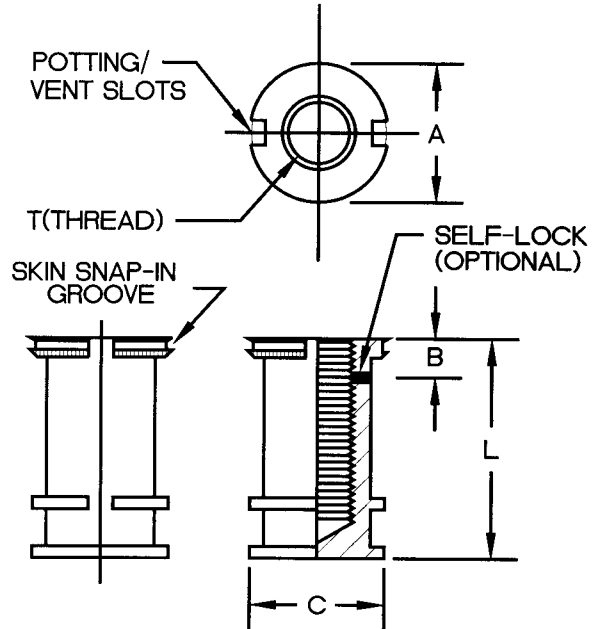


TABLE II

| DASH NO. | L ±.03 LENGTH | MINIMUM | | | FULL | THREAD | DEPTH | |
|----------|------------------|---------|------|------|------|--------|-------|--|
| | | #6 | #8 | #10 | 1/4 | 5/16 | 3/8 | |
| -5 | .312 | .162 | .162 | -- | -- | -- | -- | |
| -6 | .375 | .225 | .225 | .175 | -- | -- | -- | |
| -7 | .437 | .276 | .287 | .237 | -- | -- | -- | |
| -8 | .500 | .276 | .328 | .375 | .225 | -- | -- | |
| -10 | .625 | .276 | .328 | .375 | .350 | .350 | .350 | |
| -12 | .750 | .276 | .328 | .375 | .475 | .475 | .475 | |
| -14 | .875 | .276 | .328 | .375 | .500 | .600 | .600 | |
| -16 | 1.000 | .276 | .328 | .375 | .500 | .625 | .725 | |
| -18 | 1.125 | .276 | .328 | .375 | .500 | .625 | .750 | |

EXAMPLE: PART NUMBERING SYSTEM

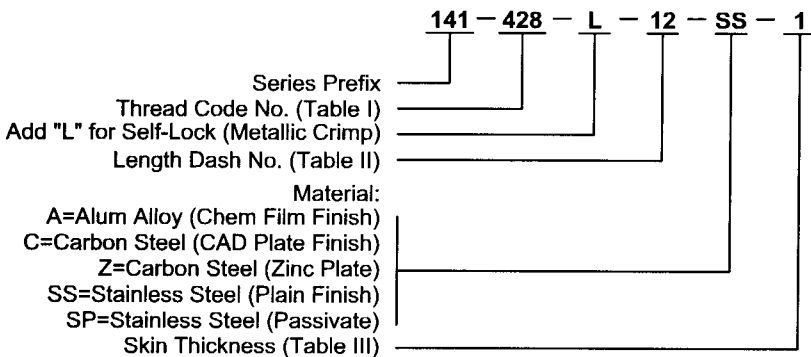


TABLE III

| DASH NO. | SKIN THICKNESS INSTALL SIDE |
|----------|--------------------------------|
| -1 | .010-.019 |
| -2 | .020-.029 |
| -2 | .030-.039 |
| -4 | .040-.049 |
| -5 | .050-.059 |
| -6 | .060-.069 |
| -7 | .070-.079 |
| -8 | .080-.089 |
| -9 | .090-.099 |

- Notes:**
1. Threads per MIL-S-7742
 2. Installation tabs are available

150 SERIES - "SPIRAL RIB"

THREADED INSERT, BLIND, REGULAR HEAD STYLE HEAVY DUTY,
"HIGH PERFORMANCE"

TABLE I

| CODE NO. | T THREAD | A DIA ±.010 | B SELF-LK ±.06 | C DIA ±.010 | INSL HOLE +.010/ -.000 |
|----------|-----------------|-------------------|----------------------|-------------------|---------------------------------|
| 632 | 6-32 UNJC -3B | .490 | .12 | .460 | .500 |
| 832 | 8-32 UNJC -3B | .490 | .12 | .460 | .500 |
| 1032 | 10-32 UNJF - 3B | .520 | .12 | .490 | .530 |
| 420 | 1/4-20 UNJC-3B | .583 | .16 | .553 | .593 |
| 428 | 1/4-28 UNJF-3B | .583 | .16 | .553 | .593 |
| 518 | 5/16-18 UNJC-3B | .646 | .20 | .616 | .656 |
| 524 | 5/16-24 UNJF-3B | .646 | .20 | .616 | .656 |
| 616 | 3/8-16 UNJC-3B | .708 | .20 | .678 | .718 |
| 624 | 3/8-24 UNJF-3B | .708 | .20 | .678 | .718 |
| 714 | 7/16-14 UNJC-3B | .771 | .20 | .741 | .781 |
| 720 | 7/16-20 UNJF-3B | .771 | .20 | .741 | .781 |
| 813 | 1/2-13 UNJC-3B | .833 | .20 | .803 | .843 |
| 820 | 1/2-20 UNJF-3B | .833 | .20 | .803 | .843 |

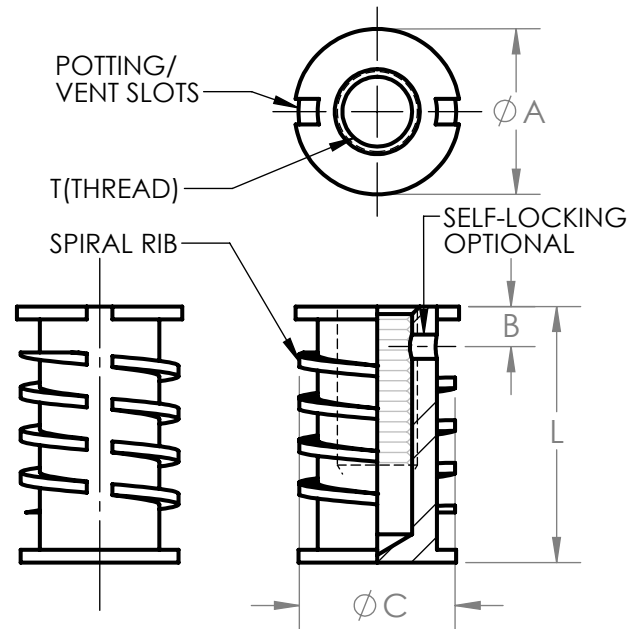


TABLE II

| DASH NO. | L±.030 LENGTH | MINIMUM FULL THREAD DEPTH | | | | | | | |
|----------|---------------|---------------------------|------|------|------|------|------|------|-------|
| | | #6 | #8 | #10 | 1/4 | 5/16 | 3/8 | 7/16 | 1/2 |
| -5 | .312 | .162 | .162 | - | - | - | - | - | - |
| -6 | .375 | .225 | .225 | .175 | - | - | - | - | - |
| -7 | .437 | .276 | .287 | .237 | - | - | - | - | - |
| -8 | .500 | .276 | .328 | .300 | .225 | - | - | - | - |
| -10 | .625 | .276 | .328 | .375 | .350 | .350 | .350 | - | - |
| -12 | .750 | .276 | .328 | .375 | .475 | .475 | .475 | .400 | .400 |
| -14 | .875 | .276 | .328 | .375 | .500 | .600 | .600 | .525 | .525 |
| -16 | 1.000 | .276 | .328 | .375 | .500 | .625 | .725 | .650 | .650 |
| -18 | 1.125 | .276 | .328 | .375 | .500 | .625 | .750 | .775 | .775 |
| -20 | 1.250 | .276 | .328 | .375 | .500 | .625 | .750 | .874 | .900 |
| -22 | 1.375 | .276 | .328 | .375 | .500 | .625 | .750 | .874 | 1.000 |
| -24 | 1.500 | .276 | .328 | .375 | .500 | .625 | .750 | .874 | 1.000 |

NOTES:

1. THREADS PER AS8879, CLASS 3B
2. PATENT NO. 4,941,785 AND 5,082,405
3. NO. OF SPIRAL RIBS VARIES WITH LENGTH
4. INSTALLATION TABS INCLUDED

150 - 428 - L - 12 - SS

MATERIAL & FINISH:

- A = ALUM ALLOY (CHEM FILM FINISH, 1A)
- A3= ALUM ALLOY (CHEM FILM FINISH, 3)
- C = CARBON STEEL (CAD PLATE FINISH)
- Z = CARBON STEEL (ZINC PLATE)
- SS = STAINLESS STEEL (PLAIN FINISH)
- SP = STAINLESS STEEL (PASSIVATE)
- SPV = STAINLESS STEEL (SILVER)

LENGTH DASH NO. (TABLE II)


ADD "LK" FOR SELF-LOCK (NYLON)
ADD "L" FOR SELF-LOCK (METALLIC CRIMP)

THREAD CODE NO. (TABLE I)

SERIES PREFIX

METRIC 150 SERIES - "SPIRAL RIB" THREADED INSERT, BLIND, REGULAR HEAD STYLE HEAVY DUTY, "HIGH PERFORMANCE"

| CODE NO. | T THREAD | A DIA ±.010 | B SELF-LK ±.06 | C DIA ±.010 | INSTL HOLE +.010/ -.000 |
|----------|----------|----------------|-------------------|----------------|-------------------------------|
| M3.5 | M3.5X.6 | .490 | .12 | .460 | .500 |
| M4 | M4X.7 | .490 | .12 | .460 | .500 |
| M5 | M5X.8 | .520 | .12 | .490 | .530 |
| M6 | M6X1 | .583 | .16 | .553 | .593 |
| M8X1 | M8X1 | .646 | .20 | .616 | .656 |
| M8X1.25 | M8X1.25 | .646 | .20 | .616 | .656 |
| M10X1.25 | M10X1.25 | .708 | .20 | .678 | .718 |
| M10X1.5 | M10X1.5 | .708 | .20 | .678 | .718 |
| M12X1.5 | M12X1.5 | .833 | .20 | .803 | .843 |
| M12X1.75 | M12X1.75 | .833 | .20 | .803 | .843 |
| M14X1.5 | M14X1.5 | .895 | .20 | .862 | .906 |
| M14X2.0 | M14X2.0 | .895 | .20 | .862 | .906 |
| M16X1.5 | M16X1.5 | .958 | .22 | .924 | .968 |
| M16X2 | M16X2 | .958 | .22 | .924 | .968 |

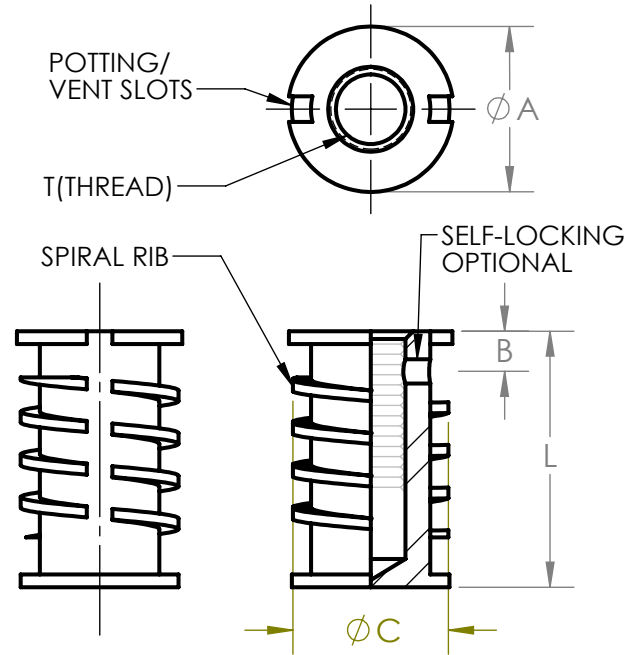

| DASH NO. | L±.030 LENGTH | MINIMUM FULL THREAD DEPTH | | | | | | | | | |
|----------|---------------|---------------------------|------|------|------|------|------|------|-------|-------|--|
| | | M3.5 | M4 | M5 | M6 | M8 | M10 | M12 | M14 | M16 | |
| -5 | .312 | .162 | .162 | - | - | - | - | - | - | - | |
| -6 | .375 | .225 | .225 | .175 | - | - | - | - | - | - | |
| -7 | .437 | .276 | .287 | .237 | - | - | - | - | - | - | |
| -8 | .500 | .276 | .315 | .300 | .225 | - | - | - | - | - | |
| -10 | .625 | .276 | .315 | .375 | .350 | .350 | .350 | - | - | - | |
| -12 | .750 | .276 | .315 | .393 | .472 | .475 | .475 | .400 | .400 | .350 | |
| -14 | .875 | .276 | .315 | .393 | .472 | .600 | .600 | .525 | .525 | .475 | |
| -16 | 1.000 | .276 | .315 | .393 | .472 | .625 | .725 | .650 | .650 | .600 | |
| -18 | 1.125 | .276 | .315 | .393 | .472 | .629 | .750 | .775 | .775 | .725 | |
| -20 | 1.250 | .276 | .315 | .393 | .472 | .629 | .786 | .874 | .900 | .850 | |
| -22 | 1.375 | .276 | .315 | .393 | .472 | .629 | .786 | .944 | 1.000 | .975 | |
| -24 | 1.500 | .276 | .315 | .393 | .472 | .629 | .786 | .944 | 1.000 | 1.150 | |

150 - M5 - L - 12 - SS

MATERIAL & FINISH:
 A = ALUM ALLOY (CHEM FILM FINISH)
 C = CARBON STEEL (CAD PLATE FINISH)
 Z = CARBON STEEL (ZINC PLATE)
 SS = STAINLESS STEEL (PLAIN FINISH)
 SP = STAINLESS STEEL (PASSIVATE)

LENGTH DASH NO. (TABLE II)

ADD "LK" FOR SELF-LOCK (NYLON)
 ADD "L" FOR SELF-LOCK (METALLIC CRIMP)

THREAD CODE NO. (TABLE I)

SERIES PREFIX

NOTES:


1. THREADS PER FED-STD-H28/21
2. PATENT NO. 4,941,785 AND 5,082,405
3. NO. OF SPIRAL RIBS VARIES WITH LENGTH
4. INSTALLATION TABS ARE AVAILABLE

WITTEN COMPANY
918-272-9567

APPROVAL DATE: REV:B 5/11/2023
CAGE CODE: 0JHK5

151 SERIES - "SPIRAL RIB" THREADED INSERT, BLIND, SNAP-IN HEAD STYLE HEAVY DUTY, "HIGH PERFORMANCE"

| CODE NO. | T THREAD | A DIA ±.010 | B SELF-LK ±.06 | C DIA ±.010 | INSTL HOLE +.010/ -.000 |
|----------|-----------------|-------------------|----------------------|-------------------|----------------------------------|
| 632 | 6-32 UNJC -3B | .500 | .12 | .427 | .468 |
| 832 | 8-32 UNJC -3B | .500 | .12 | .427 | .468 |
| 1032 | 10-32 UNJF - 3B | .531 | .12 | .458 | .500 |
| 420 | 1/4-20 UNJC-3B | .594 | .16 | .521 | .562 |
| 428 | 1/4-28 UNJF-3B | .594 | .16 | .521 | .562 |
| 518 | 5/16-18 UNJC-3B | .656 | .20 | .583 | .625 |
| 524 | 5/16-24 UNJF-3B | .656 | .20 | .583 | .625 |
| 616 | 3/8-16 UNJC-3B | .719 | .20 | .646 | .687 |
| 624 | 3/8-24 UNJF-3B | .719 | .20 | .646 | .687 |
| 714 | 7/16-14 UNJC-3B | .781 | .20 | .708 | .750 |
| 720 | 7/16-20 UNJF-3B | .781 | .20 | .708 | .750 |
| 813 | 1/2-13 UNJC-3B | .844 | .20 | .771 | .812 |
| 820 | 1/2-20 UNJF-3B | .844 | .20 | .771 | .812 |

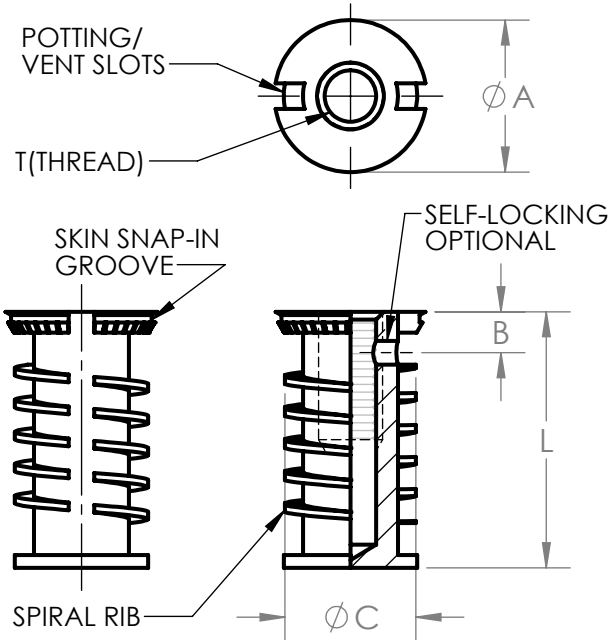

| DASH NO. | L±.030 LENGTH | MINIMUM FULL THREAD DEPTH | | | | | | | |
|----------|---------------|---------------------------|------|------|------|------|------|------|-------|
| | | #6 | #8 | #10 | 1/4 | 5/16 | 3/8 | 7/16 | 1/2 |
| -5 | .312 | .162 | .162 | - | - | - | - | - | - |
| -6 | .375 | .225 | .225 | .175 | - | - | - | - | - |
| -7 | .437 | .276 | .287 | .237 | - | - | - | - | - |
| -8 | .500 | .276 | .328 | .300 | .225 | - | - | - | - |
| -10 | .625 | .276 | .328 | .375 | .350 | .350 | .350 | - | - |
| -12 | .750 | .276 | .328 | .375 | .475 | .475 | .475 | .400 | .400 |
| -14 | .875 | .276 | .328 | .375 | .500 | .600 | .600 | .525 | .525 |
| -16 | 1.000 | .276 | .328 | .375 | .500 | .625 | .725 | .650 | .650 |
| -18 | 1.125 | .276 | .328 | .375 | .500 | .625 | .750 | .775 | .775 |
| -20 | 1.250 | .276 | .328 | .375 | .500 | .625 | .750 | .874 | .900 |
| -22 | 1.375 | .276 | .328 | .375 | .500 | .625 | .750 | .874 | 1.000 |
| -24 | 1.500 | .276 | .328 | .375 | .500 | .625 | .750 | .874 | 1.000 |

151 - 428 - L - 12 - SS - 1

SKIN THICKNESS (TABLE III)

MATERIAL & FINISH:

- A = ALUM ALLOY (CHEM FILM FINISH)
- C = CARBON STEEL (CAD PLATE FINISH)
- Z = CARBON STEEL (ZINC PLATE)
- SS = STAINLESS STEEL (PLAIN FINISH)
- SP = STAINLESS STEEL (PASSIVATE)

LENGTH DASH NO. (TABLE II)

ADD "L" FOR SELF-LOCK (METALLIC CRIMP)

ADD "LK" FOR SELF-LOCK (NYLON) WITTEN COMPANY
918-272-9567

THREAD CODE NO. (TABLE I)

SERIES PREFIX

APPROVAL DATE: REV:A 5/11/2023

CAGE CODE: 0JHK5

| DASH NO. | SKIN THICKNESS INSTALLATION SIDE |
|----------|-------------------------------------|
| -1 | .010 - .019 |
| -2 | .020 - .029 |
| -3 | .030 - .039 |
| -4 | .040 - .049 |
| -5 | .050 - .059 |
| -6 | .060 - .069 |
| -7 | .070 - .079 |
| -8 | .080 - .089 |
| -9 | .090 - .099 |

NOTES:

1. THREADS PER AS8879, CLASS 3B
2. PATENT NO. 4,941,785 AND 5,082,405
3. NO. OF SPIRAL RIBS VARIES WITH LENGTH
4. INSTALLATION TABS ARE AVAILABLE

METRIC 151 SERIES - "SPIRAL RIB" THREADED INSERT, BLIND, SNAP-IN HEAD STYLE HEAVY DUTY, "HIGH PERFORMANCE"

TABLE I

| CODE NO. | T THREAD | A DIA ±.010 | B SELF- LOCK ±.06 | C DIA ±.010 | INSTALLATION HOLE +.010 /-.000 |
|----------|-------------|-------------------|----------------------------|-------------------|--------------------------------------|
| M3.5 | M3.5x.6 | .500 | .12 | .427 | .468 |
| M4 | M4x.7 | .500 | .12 | .427 | .468 |
| M5 | M5x.8 | .531 | .12 | .458 | .500 |
| M6 | M6x1 | .594 | .16 | .521 | .562 |
| M8x1 | M8x1 | .656 | .20 | .583 | .625 |
| M8x1.25 | M8x1.25 | .656 | .20 | .583 | .625 |
| M10x1.25 | M10x1.25 | .719 | .20 | .646 | .687 |
| M10x1.5 | M10x1.5 | .719 | .20 | .646 | .687 |
| M12x1.5 | M12x1.5 | .844 | .20 | .771 | .812 |
| M12x1.75 | M12x1.75 | .844 | .20 | .771 | .812 |

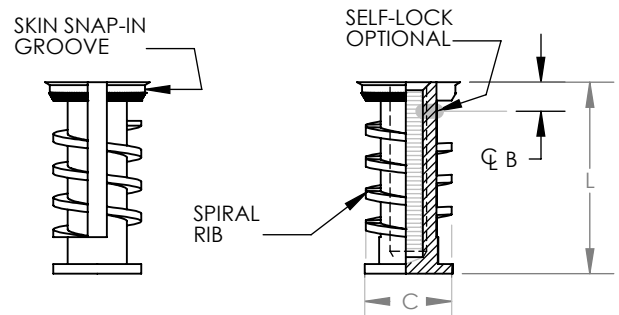
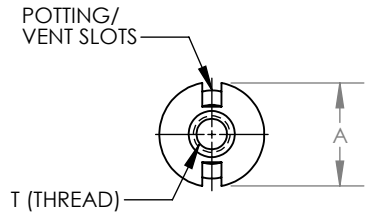


TABLE II

| DASH NO. | L ±.03 LENGTH | MINIMUM FULL THREAD DEPTH | | | | | | |
|-------------|------------------|---------------------------|------|------|------|------|------|-------|
| | | M 3.5 | M 4 | M 5 | M 6 | M 8 | M 10 | M 12 |
| -5 | .312 | .162 | .162 | - | - | - | - | - |
| -6 | .375 | .225 | .225 | .175 | - | - | - | - |
| -7 | .437 | .276 | .287 | .237 | - | - | - | - |
| -8 | .500 | .276 | .328 | .300 | .225 | - | - | - |
| -10 | .625 | .276 | .328 | .375 | .350 | .350 | .350 | - |
| -12 | .750 | .276 | .328 | .375 | .475 | .475 | .475 | .400 |
| -14 | .875 | .276 | .328 | .375 | .500 | .600 | .600 | .525 |
| -16 | 1.000 | .276 | .328 | .375 | .500 | .625 | .725 | .650 |
| -18 | 1.125 | .276 | .328 | .375 | .500 | .625 | .750 | .775 |
| -20 | 1.250 | .276 | .328 | .375 | .500 | .625 | .750 | .900 |
| -22 | 1.375 | .276 | .328 | .375 | .500 | .625 | .750 | 1.000 |
| -24 | 1.500 | .276 | .328 | .375 | .500 | .625 | .750 | 1.000 |

EXAMPLE: PART NUMBERING SYSTEM

151-M5-LK-12-SS-1

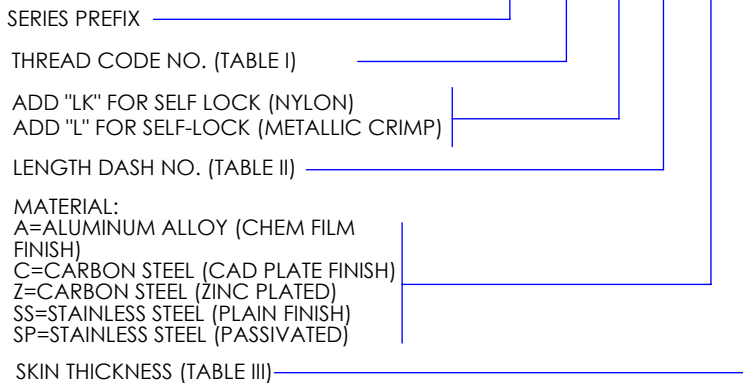



TABLE III

| DASH NO. | SKIN THICKNESS INSTALLATION SIDE |
|-------------|-------------------------------------|
| -1 | .010 - .019 |
| -2 | .020 - .029 |
| -3 | .030 - .039 |
| -4 | .040 - .049 |
| -5 | .050 - .059 |
| -6 | .060 - .069 |
| -7 | .070 - .079 |
| -8 | .080 - .089 |
| -9 | .090 - .099 |

NOTES:
1.THREADS PER MIL-S-7742
2.PATENT NO. 4,941,785 & 5,082,405
3.NO. OF SPIRAL RIBS VARY WITH LENGTH

155 SERIES FLOATING INSERTS


| CODE NO. | T THREAD | A DIA +.000 -.010 | INSTEAD HOLE DIA |
|----------|-------------|-------------------------|------------------|
| 832 | 8-32 UNC | .685 | .686 - .691 |
| 1032 | 10-32 UNF | .685 | .686 - .691 |
| 420 | 1/4-20 UNC | .748 | .749 - .755 |
| 428 | 1/4-28 UNF | .748 | .749 - .755 |
| 518 | 5/16-18 UNC | .810 | .811 - .817 |
| 524 | 5/16-24 UNF | .810 | .811 - .817 |
| 616 | 3/8-16 UNC | .873 | .874 - .880 |
| 624 | 3/8-24 UNF | .873 | .874 - .880 |
| 714 | 7/16-14 UNC | .936 | .937 - .943 |
| 720 | 7/16-20 UNF | .936 | .937 - .943 |
| 813 | 1/2-13 UNC | 1.061 | 1.062 - 1.068 |
| 820 | 1/2-20 UNF | 1.061 | 1.062 - 1.068 |

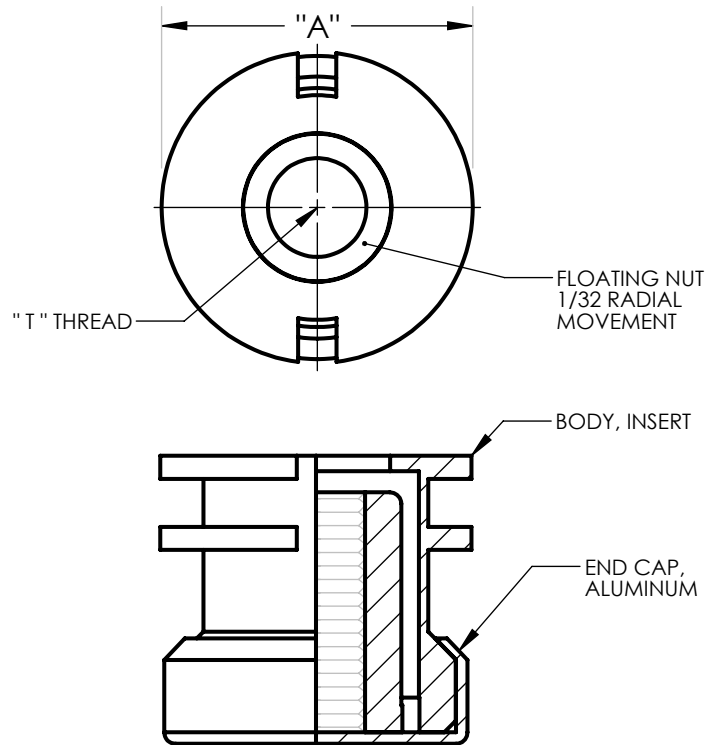

| DASH NO. | L±.03 LENGTH | MINIMUM FULL THREAD DEPTH | | | | | | |
|----------|--------------|---------------------------|------|------|------|------|------|-------|
| | | #8 | #10 | 1/4 | 5/16 | 3/8 | 7/16 | 1/2 |
| -7 | .437 | .287 | .237 | - | - | - | - | - |
| -8 | .500 | .328 | .300 | .225 | - | - | - | - |
| -10 | .625 | .328 | .375 | .350 | .350 | .350 | - | - |
| -12 | .750 | .328 | .375 | .475 | .475 | .475 | .400 | .400 |
| -14 | .875 | .328 | .375 | .500 | .600 | .600 | .525 | .525 |
| -16 | 1.000 | .328 | .375 | .500 | .625 | .725 | .650 | .650 |
| -18 | 1.125 | .328 | .375 | .500 | .625 | .750 | .775 | .775 |
| -20 | 1.250 | .328 | .375 | .500 | .625 | .750 | .874 | .900 |
| -22 | 1.375 | .328 | .375 | .500 | .625 | .750 | .874 | 1.000 |
| -24 | 1.500 | .328 | .375 | .500 | .625 | .750 | .874 | 1.000 |

155 SERIES FLOATING INSERTS

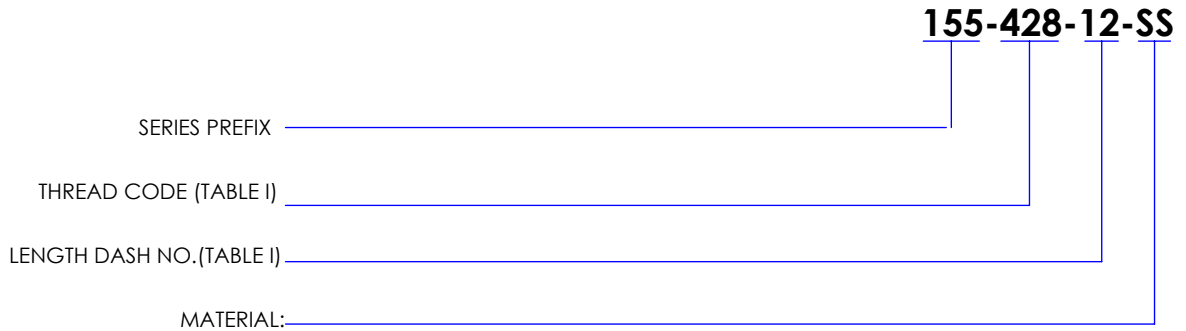EXAMPLE: PART NUMBERING SYSTEM



A= ALUMINUM(CHEM FILM FINISH)HOUSING & CAP WITH CARBON STEEL NUT (CADMIUM PLATED).

C=CARBON STEEL(CAD PLATE FINISH)HOUSING & NUT WITH ALUMINUM(CHEM FILM FINISH) CAP.

Z=CARBOM STEEL(ZINC PLATE FINISH) HOUSING & NUT WITH ALUMINUM (CHEM FILM FINISH) CAP.

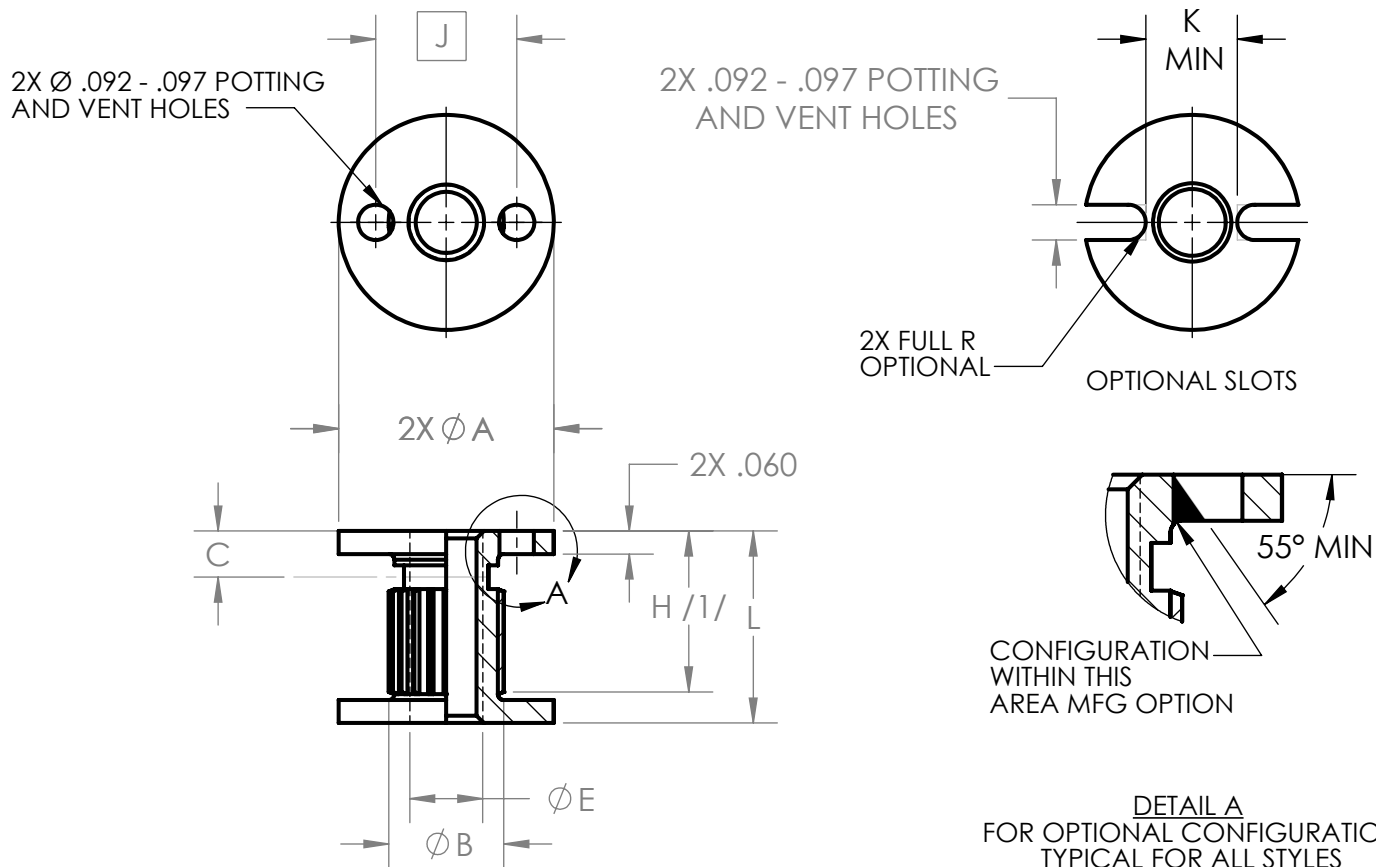
SS=STAINLESS STEEL (NO FINISH) HOUSING & NUT WITH ALUMINUM (CHEM FILM FINISH) CAP.

SP=STAINLESS STEEL(PASIVATE) HOUSING & NUT WITH ALUMINUM (CHEM FILM FINISH) CAP.


NOTES:

- 1.THREADS PER SAE-AS8879
- 2.PATENT NO. 4,941,765 AND 5,082,405
3. NO. OF RIBS VARY WITH LENGTH.
4. INSTALLATION TABS ARE AVAILABLE.

**180 SERIES
THREADED INSERT, THRU, REGULAR HEAD STYLE
(NAS 1833 TYPE)**



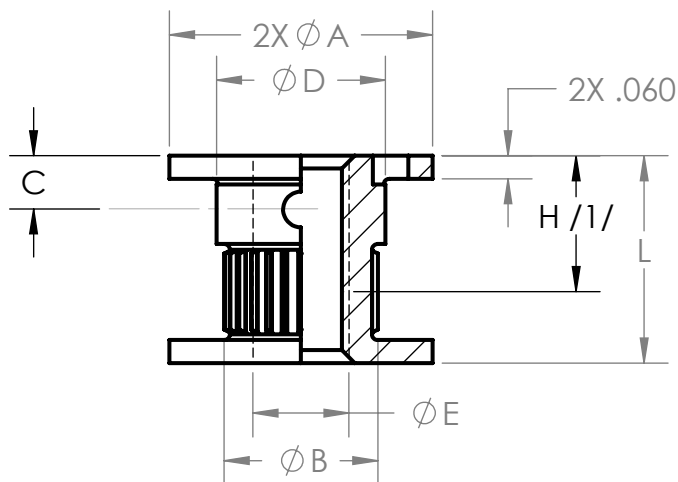ALL STEEL AND CRES SELF-LOCKING AND NONSELF-LOCKING OR NONSELF-LOCKING ALUMINUM STYLE INSERTS



ALUMINUM SELF-LOCKING STYLE OR ALTERNATE NONSELF-LOCKING ALUMINUM STYLE

180 SERIES

THREADED INSERT, THRU, REGULAR HEAD STYLE

(NAS 1833 TYPE)

TABLE I - DIMENSIONS

| CODE NO. | T THREAD | ØA +.000 -.010 | ØB | C SELF-LK ±.06 | ØD | ØE /1/ | H MIN /1/ | J BASIC | K MIN | L MIN /2/ | INSTALLATION HOLE SIZE |
|----------|-----------------|----------------------|------|----------------------|------|-------------|-----------------|------------|----------|-----------------|---------------------------|
| 632 | 6-32 UNJC -3B | .560 | .300 | .12 | .375 | .139 - .145 | .276 | .367 | .260 | .250 | .561 - .566 |
| 832 | 8-32 UNJC -3B | .560 | .300 | .12 | .375 | .168 - .174 | .328 | .367 | .260 | .250 | .561 - .566 |
| 1024 | 10-24 UNJC - 3B | .560 | .300 | .12 | .375 | .195 - .201 | .380 | .367 | .260 | .250 | .561 - .566 |
| 1032 | 10-32 UNJF - 3B | .560 | .300 | .12 | .375 | .195 - .201 | .380 | .367 | .260 | .250 | .561 - .566 |
| 420 | 1/4-20 UNJC-3B | .685 | .375 | .14 | .440 | .256 - .263 | .500 | .467 | .360 | .312 | .686 - .691 |
| 428 | 1/4-28 UNJF-3B | .685 | .375 | .14 | .440 | .256 - .263 | .500 | .467 | .360 | .312 | .686 - .691 |
| 518 | 5/16-18 UNJC-3B | .685 | .475 | .16 | .500 | .315 - .322 | .625 | .467 | .360 | .312 | .686 - .691 |
| 524 | 5/16-24 UNJF-3B | .685 | .475 | .16 | .500 | .315 - .322 | .625 | .467 | .360 | .312 | .686 - .691 |
| 616 | 3/8-16 UNJC-3B | .841 | .500 | .22 | .550 | .376 - .383 | .750 | .591 | .484 | .375 | .842 - .847 |
| 624 | 3/8-24 UNJF-3B | .841 | .500 | .22 | .550 | .376 - .383 | .750 | .591 | .484 | .375 | .842 - .847 |

MATERIAL:

CARBON STEEL:

PER ASTM A108.

AL ALLOY:

GRADE 2024 (UNS A92024), TEMPER T4 OR T351 PER AMS-QQ-A-225/6.

CRES:

TYPE 303 (UNS S30300) PER ASTM A582/A582M.

FINISH:

CARBON STEEL:

CADMIUM PLATE PER AMS QQ-P-416, TYPE II, CLASS 2.
ZINC PLATE PER ASTM-B633, SC2, TYPE I.

AL ALLOY:

ANODIZE PER MIL-A-8625, TYPE I, CLASS OPTIONAL
CHEM-FILM PER MIL-DTL-5541F, CLASS 1A.
CHEM-FILM PER MIL-DTL-5541F, CLASS 3.

CRES:

PASSIVATE PER ASTM-A967.

SOLID FILM LUBRICANT PER AS5272, TYPE I, APPLIED TO THREAD ONLY.

TABLE II


SEE NOTE 4

| DASH NO. | L±.010 LENGTH |
|----------|---------------|
| -4 | .250 |
| -5 | .312 |
| -6 | .375 |
| -7 | .437 |
| -8 | .500 |
| -9 | .563 |
| -10 | .625 |
| -11 | .687 |
| -12 | .750 |
| -13 | .812 |
| -14 | .875 |
| -15 | .937 |
| -16 | 1.000 |

180 SERIES THREADED INSERT, THRU, REGULAR HEAD STYLE (NAS 1833 TYPE)

CODING:

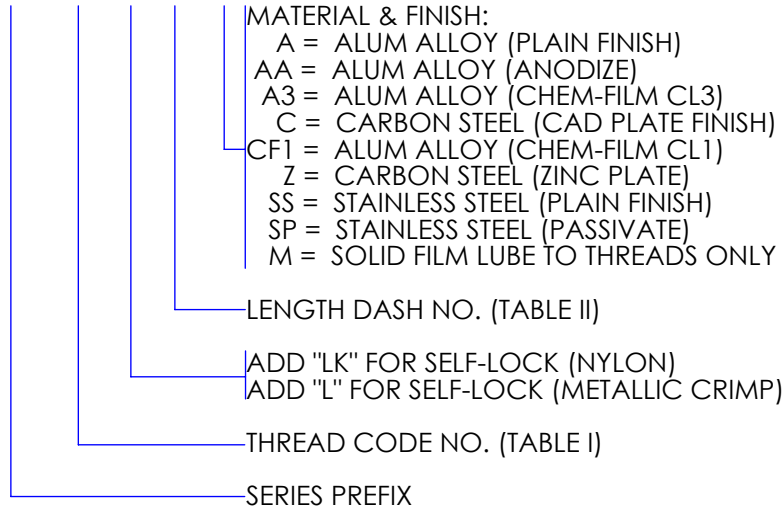180 - 428 - L - 12 - SS




NOTES:


1. MINIMUM THREAD DEPTH "H" WHERE LENGTH PERMITS SHALL BE 2X DIAMETER OF THREAD. LENGTHS SHORTER THAN 2X DIAMETER OF THREAD SHALL BE THREADED THE ENTIRE LENGTH. LENGTHS LONGER THAN 2X DIAMETER MAY HAVE A THREAD RELIEF SHOWN BY "Ø E" AND "H" OR MAY BE THREADED THE ENTIRE LENGTH (MANUFACTURER'S OPTION).
2. THREADS PER AS8879, CLASS 3B
3. INSTALLATION TABS ARE INCLUDED.
4. TOLERANCES .XXX = ±.010
.XX = ±.02
5. FOR OTHER LENGTHS USE .XXX CALLOUT AS SHOWN:
180-428-.400-SS

LENGTH

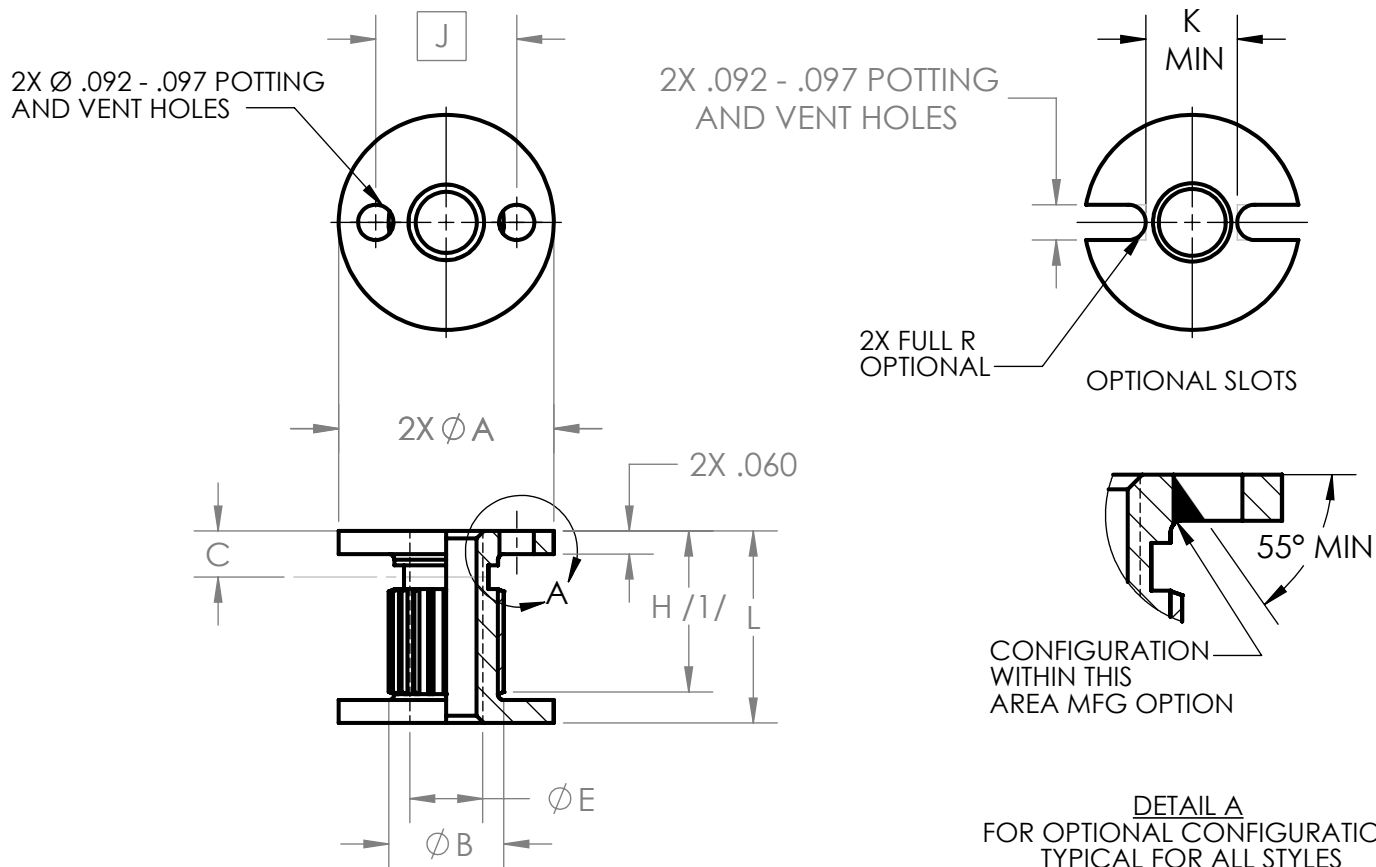METRIC 180 SERIES
 THREADED INSERT, THRU, REGULAR HEAD STYLE
 (NAS 1833 TYPE)



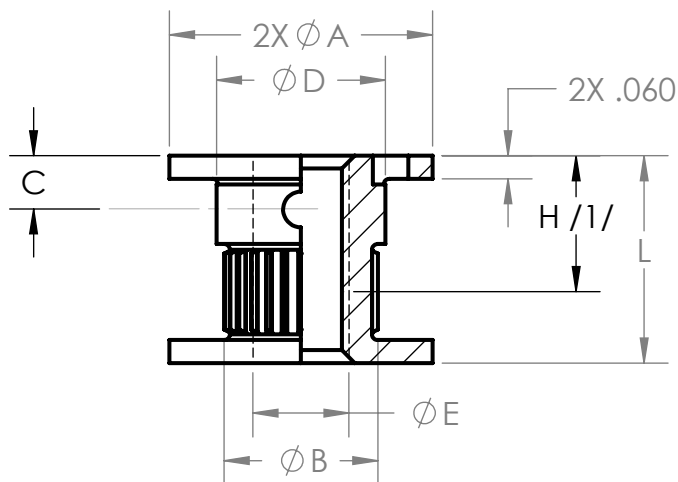ALL STEEL AND CRES SELF-LOCKING AND NONSELF-LOCKING OR NONSELF-LOCKING ALUMINUM STYLE INSERTS



ALUMINUM SELF-LOCKING STYLE OR ALTERNATE NONSELF-LOCKING ALUMINUM STYLE

METRIC 180 SERIES

THREADED INSERT, THRU, REGULAR HEAD STYLE

(NAS 1833 TYPE)

| TABLE I - DIMENSIONS | | | | | | | | | | | |
|----------------------|----------|----------------------|------|----------------------|------|-------------|-----------------|------------|----------|-----------------|---------------------------|
| CODE NO. | T THREAD | ØA +.000 -.010 | ØB | C SELF-LK ±.06 | ØD | ØE /1/ | H MIN /1/ | J BASIC | K MIN | L MIN /2/ | INSTALLATION HOLE SIZE |
| M3.5 | M3.5X.6 | .560 | .300 | .12 | .375 | .139 - .145 | .276 | .367 | .260 | .250 | .561 - .566 |
| M4 | M4X.7 | .560 | .300 | .12 | .375 | .168 - .174 | .328 | .367 | .260 | .250 | .561 - .566 |
| M5 | M5X.8 | .560 | .300 | .12 | .375 | .195 - .201 | .380 | .367 | .260 | .250 | .561 - .566 |
| M6 | M6X1 | .685 | .375 | .14 | .440 | .256 - .263 | .500 | .467 | .360 | .312 | .686 - .691 |
| M8X1 | M8X1 | .685 | .475 | .16 | .500 | .315 - .322 | .625 | .467 | .360 | .312 | .686 - .691 |
| M8X1.25 | M8X1.25 | .685 | .475 | .16 | .500 | .315 - .322 | .625 | .467 | .360 | .312 | .686 - .691 |
| M10X1.25 | M10X1.25 | .841 | .500 | .22 | .550 | .376 - .383 | .750 | .591 | .484 | .375 | .842 - .847 |
| M10X1.5 | M10X1.5 | .841 | .500 | .22 | .550 | .376 - .383 | .750 | .591 | .484 | .375 | .842 - .847 |

MATERIAL: CARBON STEEL:

PER ASTM A108.

AL ALLOY:

GRADE 2024 (UNS A92024), TEMPER T4 OR T351 PER AMS-QQ-A-225/6.

CRES:

TYPE 303 (UNS S30300) PER ASTM A582/A582M.

FINISH:

CARBON STEEL:

CADMIUM PLATE PER AMS QQ-P-416, TYPE II, CLASS 2.
ZINC PLATE PER ASTM-B633, SC2, TYPE I.

AL ALLOY:

ANODIZE PER MIL-A-8625, TYPE I, CLASS OPTIONAL
CHEM-FILM PER MIL-DTL-5541F, CLASS 1A.
CHEM-FILM PER MIL-DTL-5541F, CLASS 3.

CRES:


PASSIVATE PER ASTM-A967.

SOLID FILM LUBRICANT PER AS5272, TYPE I, APPLIED TO THREAD ONLY.

| TABLE II | |
|------------|---------------|
| SEE NOTE 4 | |
| DASH NO. | L±.010 LENGTH |
| -4 | .250 |
| -5 | .312 |
| -6 | .375 |
| -7 | .437 |
| -8 | .500 |
| -9 | .563 |
| -10 | .625 |
| -11 | .687 |
| -12 | .750 |
| -13 | .812 |
| -14 | .875 |
| -15 | .937 |
| -16 | 1.000 |

CODING:

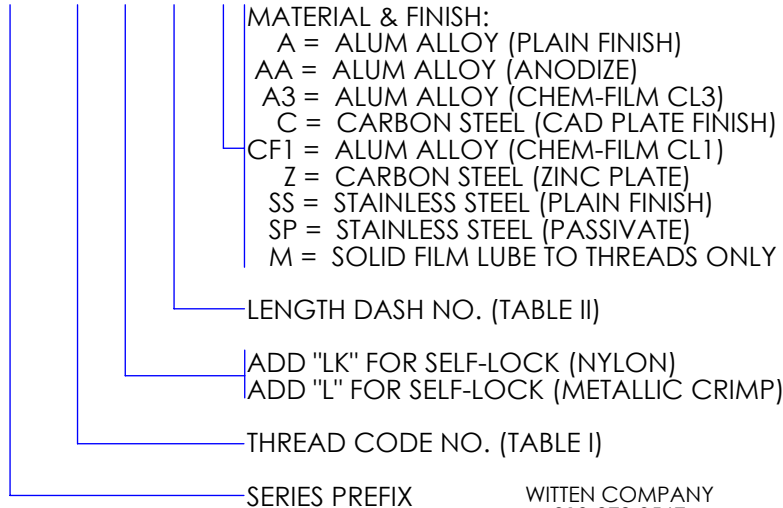180 - M6 - L - 12 - SS



NOTES:

- 1/1 MINIMUM THREAD DEPTH "H" WHERE LENGTH PERMITS SHALL BE 2X DIAMETER OF THREAD. LENGTHS SHORTER THAN 2X DIAMETER OF THREAD SHALL BE THREADED THE ENTIRE LENGTH. LENGTHS LONGER THAN 2X DIAMETER MAY HAVE A THREAD RELIEF SHOWN BY "ØE" AND "H" OR MAY BE THREADED THE ENTIRE LENGTH (MANUFACTURER'S OPTION).
2. INSTALLATION TABS ARE INCLUDED.
3. TOLERANCES .XXX = ±.010
.XX = ±.02
4. FOR OTHER LENGTHS USE .XXX CALLOUT AS SHOWN:
180-M6-400-SS

LENGTH

WITTEN COMPANY
918-272-9567

APPROVAL DATE: REV:A 4/21/2022




CAGE CODE: 0JHK5

181 SERIES

INSERT, THRU REGULAR HEAD STYLE

CROSS REFERENCE

| WITTEN | STANDARDS/OTHER | SHUR-LOK | THE YOUNG ENGINEERS | ALCOA/TRIDAIR |
|-------------------|--|------------------------------|-------------------------------|-------------------------------|
| 181 SERIES | NAS1834 SERIES CDSP5904 & CDSP5903 | SL603 SL604 | TYE2003 TYE2004 TYE4004 | D1834 SERIES D1834K SERIES |
| 181 SERIES METRIC | | SL601 METRIC SL304 METRIC | TYE2002M | |

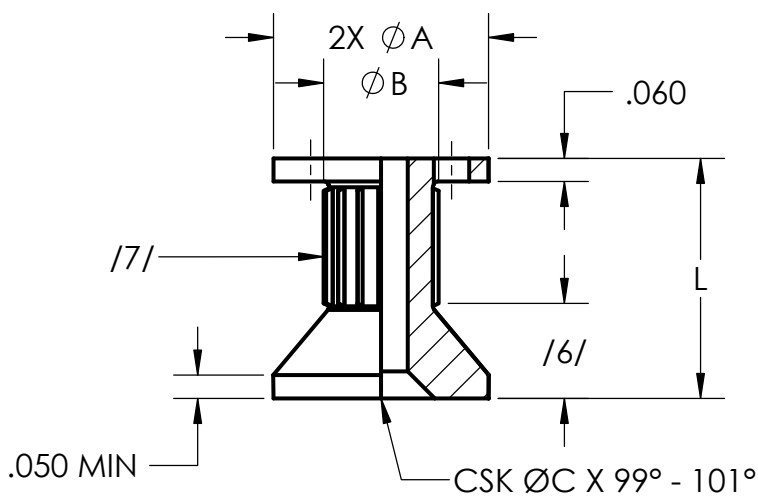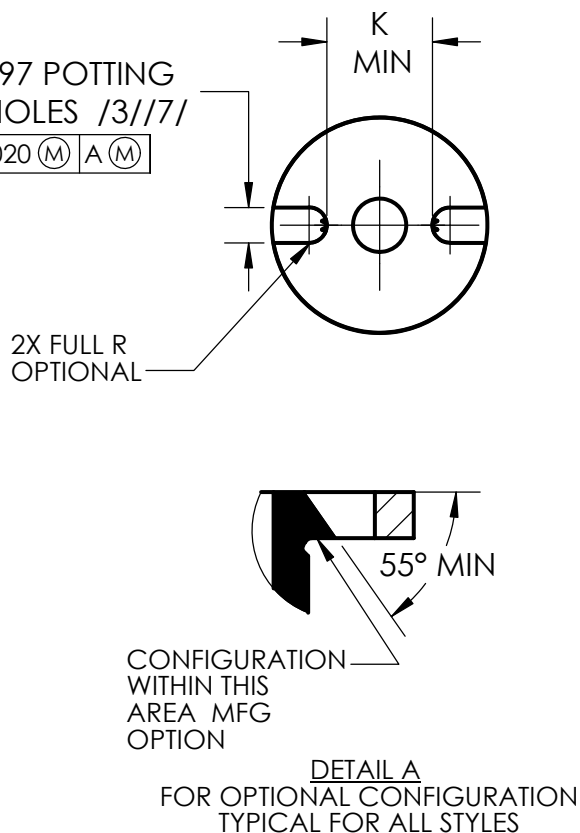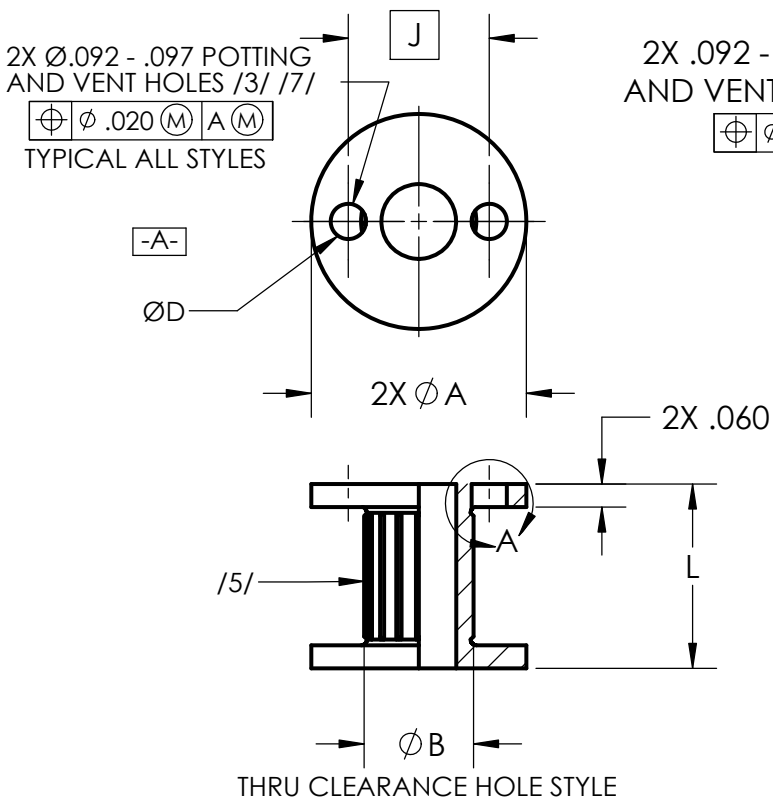

COUNTERSINK CLEARANCE HOLE STYLE

181 SERIES

INSERT, THRU REGULAR HEAD STYLE

CROSS REFERENCE

| WITTEN | STANDARDS/OTHER | SHUR-LOK | THE YOUNG ENGINEERS | ALCOA/TRIDAIR |
|-------------------|--|------------------------------|-------------------------------|-------------------------------|
| 181 SERIES | NAS1834 SERIES CDSP5904 & CDSP5903 | SL603 SL604 | TYE2003 TYE2004 TYE4004 | D1834 SERIES D1834K SERIES |
| 181 SERIES METRIC | | SL601 METRIC SL304 METRIC | TYE2002M | |

TABLE 1 DIMENSIONS

| SIZE DASH NO. | Ø A +.000 -.010 | Ø B | Ø C | Ø D CLEARANCE HOLE | J BASIC | K MIN | L MIN | INSTALLATION HOLE SIZE |
|---------------|-----------------------|-----|------|-----------------------|---------|-------|-------|------------------------|
| 06 | .560 | .30 | .280 | .139 - .145 | .367 | .260 | .250 | .561 - .566 |
| 08 | .560 | .30 | .332 | .168 - .174 | .367 | .260 | .250 | .561 - .566 |
| 3 | .560 | .30 | .385 | .195 - .201 | .367 | .260 | .250 | .561 - .566 |
| 4 | .685 | .37 | .507 | .256 - .263 | .467 | .360 | .312 | .686 - .691 |
| 5 | .685 | .47 | .625 | .315 - .322 | .467 | .360 | .312 | .686 - .691 |
| 6 | .841 | .50 | .750 | .376 - .383 | .591 | .484 | .375 | .842 - .847 |

TABLE 1A METRIC DIMENSIONS

| SIZE DASH NO. | Ø A +.000 -.010 | Ø B | Ø C | Ø D CLEARANCE HOLE | J BASIC | K MIN | L MIN | INSTALLATION HOLE SIZE |
|---------------|-----------------------|-----|------|-----------------------|---------|-------|-------|------------------------|
| M3 | .560 | .30 | .280 | .122-.127 | .367 | .260 | .250 | .561 - .566 |
| M4 | .560 | .30 | .332 | .160-.166 | .367 | .260 | .250 | .561 - .566 |
| M5 | .560 | .30 | .385 | .204-.210 | .367 | .260 | .250 | .561 - .566 |
| M6 | .685 | .37 | .507 | .243-.249 | .467 | .360 | .312 | .686 - .691 |
| M8 | .685 | .47 | .625 | .322-.329 | .467 | .360 | .312 | .686 - .691 |
| M10 | .841 | .50 | .750 | .405-.412 | .591 | .484 | .375 | .842 - .847 |

TABLE 2

SEE NOTE 4

| DASH NO. | ±.010 LENGTH |
|----------|--------------|
| -4 | .250 |
| -5 | .312 |
| -6 | .375 |
| -7 | .437 |
| -8 | .500 |
| -9 | .563 |
| -10 | .625 |
| -11 | .687 |
| -12 | .750 |
| -13 | .812 |
| -14 | .875 |
| -15 | .937 |
| -16 | 1.000 |

MATERIAL: CARBON STEEL PER ASTM A108, ULTIMATE TENSILE STRENGTH 85 KSI MINIMUM.
AL ALLOY, GRADE 2024 (UNS A92024), TEMPER T4 OR T351 PER AMS-QQ-A-225/6.
CORROSION RESISTANT STEEL, TYPE 303 (UNS S30300) PER ASTM A582/ASTM582M.

EXAMPLE PART NUMBERING SYSTEM

181- 4 - K - 12- SS

MATERIAL AND FINISH
A= ALUM ALLOY (PLAIN FINISH)
AA= ALUM W/ANODIZE
C= CARBON STEEL W/ CAD PLATE
SS= STAINLESS STEEL
SP= STAINLESS STEEL W/PASSIVATE
SV= STAINLESS W/ SILVER
CF1= ALUM, CHEM-FILM CL 1
A3= ALUM, CHEM-FILM C 3

LENGTH DASH NO (TABLE 2 INCREMENTS OF 1/16") ALT LENGTHS SEE NOTE 4

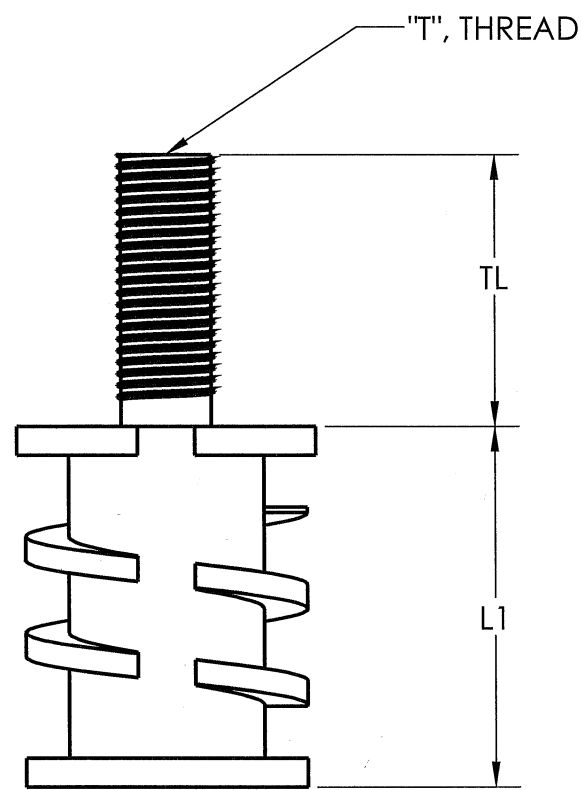
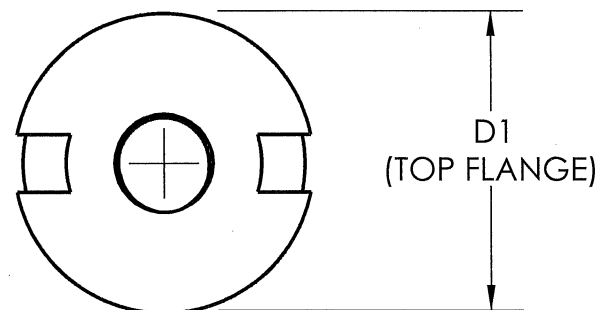
ADD "K" FOR 100° CSK

D CLEARANCE HOLE (TABLE 1)
ALT CLEARANCE HOLE SEE NOTE 8

SERIES PREFIX

GENERAL NOTES:

- INSTALLATION TABS ARE INCLUDED.
- TOLERANCES .XXX = ±.010
.XX = ±.02
- BURRS AROUND POTTING HOLES OR SLOTS PERMISSIBLE UNDER FLANGE
- FOR OTHER LENGTHS USE .XXX CALLOUT AS SHOWN:
INCH:
181-4-400-SS
LENGTH
- METRIC:**
181-4-10.2MM-SS
LENGTH
- STRAIGHT OR DIAMOND ANTIROTATIONAL KNURL, SHORTER LENGTHS KNURL OPTIONAL (MANUFACTURER'S OPTION).
- EXTERNAL CONFIGURATION OPTIONAL IN THIS AREA.
- POTTING AND VENT HOLES OR SLOTS (MANUFACTURER'S OPTION)
- FOR ALTERNATE CLEARANCE HOLE USE .XXX CALLOUT AS SHOWN:
181-439-16-SS
HOLE
(TOLERANCES MAY VARY ON ALTERNATE HOLE SIZES)



| CODE | "L1", LENGTH |
|------|--------------|
| 8 | .500 |
| 9 | .562 |
| 10 | .625 |
| 11 | .687 |
| 12 | .750 |
| 13 | .812 |
| 14 | .875 |
| 15 | .937 |
| 16 | 1.000 |
| 17 | 1.062 |
| 18 | 1.125 |
| 19 | 1.187 |
| 20 | 1.250 |

| CODE | "TL", THREAD LENGTH |
|------|---------------------|
| 6TL | .375 |
| 7TL | .437 |
| 8TL | .500 |
| 9TL | .562 |
| 10TL | .625 |
| 11TL | .687 |
| 12TL | .750 |
| 13TL | .812 |
| 14TL | .875 |
| 15TL | .937 |
| 16TL | 1.000 |
| 17TL | 1.062 |
| 18TL | 1.125 |
| 19TL | 1.187 |
| 20TL | 1.250 |

| AMERICAN NATIONAL STANDARD | | | |
|----------------------------|---------------------|-------------------|------|
| CODE | "T", THREAD | MAX THREAD LENGTH | D1 |
| 0832 | .164 - 32 UNJC - 3A | .375 | .490 |
| 1024 | .190 - 24 UNJC - 2A | .450 | .520 |
| 1032 | .190 - 32 UNJF - 3A | .450 | .520 |
| 420 | .250 - 20 UNJC - 2A | 1.187 | .583 |
| 428 | .250 - 28 UNJF - 3A | 1.187 | .583 |
| 518 | .312 - 18 UNJC - 2A | 1.375 | .646 |
| 524 | .312 - 24 UNJF - 3A | 1.375 | .646 |
| 616 | .375 - 16 UNJC - 2A | 1.500 | .708 |
| 624 | .375 - 24 UNJF - 3A | 1.500 | .708 |
| 714 | .437 - 14 UNJC - 2A | 1.625 | .771 |
| 720 | .437 - 20 UNJF - 3A | 1.625 | .771 |
| 813 | .500 - 13 UNJC - 2A | 1.750 | .833 |
| 820 | .500 - 20 UNJF - 3A | 1.750 | .833 |

| CODE | MATERIAL | FINISH |
|------|-----------------|-----------|
| C | CARBON STEEL | CAD PLATE |
| SS | STAINLESS STEEL | NO FINISH |
| SP | STAINLESS STEEL | PASSIVATE |

| METRIC | | | |
|----------|-----------------|-------------------|------|
| CODE | "T", THREAD | MAX THREAD LENGTH | D1 |
| M4 | M4 X 0.7 - 6G | .375 | .490 |
| M5 | M5 X 0.8 - 6G | .450 | .520 |
| M6 | M6 X 1.0 - 6G | 1.187 | .583 |
| M8X1 | M8 X 1.0 - 6G | 1.375 | .646 |
| M8X1.25 | M8 X 1.25 - 6G | 1.375 | .646 |
| M10X1.25 | M10 X 1.25 - 6G | 1.500 | .708 |
| M10X1.50 | M10 X 1.50 - 6G | 1.500 | .708 |
| M12X1.5 | M12 X 1.50 - 6G | 1.750 | .833 |
| M12X1.75 | M12 X 1.75 - 6G | 1.750 | .833 |

EXAMPLE: PART NUMBERING SYSTEM

250 - 428 - 16 - 14TL - SP

SERIES PREFIX
 THREAD CODE
 "L1", BODY LENGTH
 "TL", THREAD LENGTH

MATERIAL:
 C = CARBON STEEL (CAD PLATE)
 SS = STAINLESS STEEL (PLAIN FINISH)
 SP = STAINLESS STEEL (PASSIVATE)



ISOMETRIC VIEW
REF. ONLY

- 3. CUSTOM SIZES AVAILABLE UPON REQUEST.
- 2. TOLERANCES: .XXX = ±.010
- 1. ONE PIECE MACHINED PART.

NOTES

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WITTEN COMPANY INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF WITTEN COMPANY INC. IS PROHIBITED.

| | | |
|-------------|------------|-----------|
| CAGE: OJHK5 | NAME | DATE |
| DRAWN | J.HERRIMAN | 3/30/2016 |
| CHECKED | | |
| ENG APP | | |

COMMENTS:
 SOLIDWORKS STANDARD 2009 SP4.1
 THIRD ANGLE PROJECTION

TECH DATA SHEET




TITLE:
HEAVY DUTY, POTTED STUD

| | | |
|------------------|-------------------------------|--------------|
| SIZE B | DWG. NO. 250 SERIES | REV - |
| SCALE: NONE | | SHEET 1 OF 1 |

352 SERIES

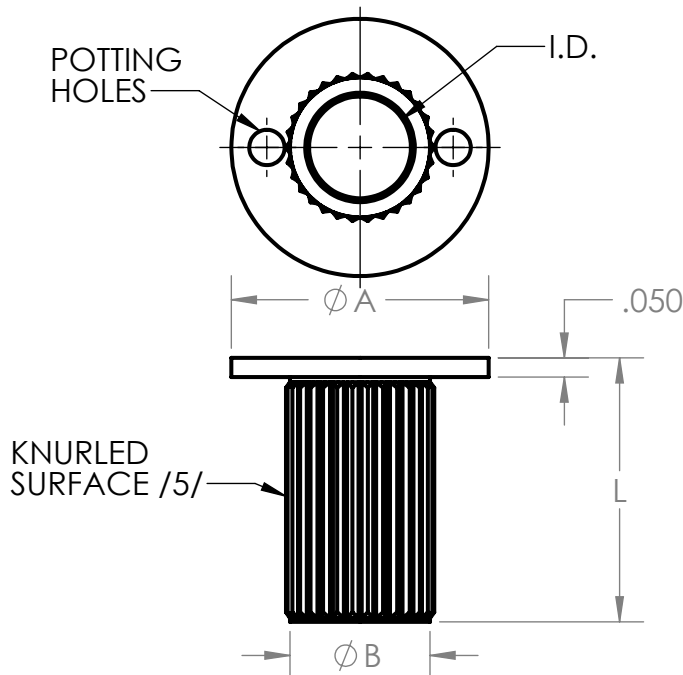THRU-HOLE SLEEVE, PROTRUDING



EXAMPLE PART NUMBERING SYSTEM


352- 105 - 12- SS

MATERIAL AND FINISH
 A= ALUM ALLOY (CHEM FILM)
 C= CARBON STEEL (CADMIUM)
 Z= CARBON STEEL (ZINC PLATE)
 SS= STAINLESS STEEL
 SP= STAINLESS (PASSIVATE)

LENGTH DASH NO (TABLE 2
 INCREMENTS OF 1/16") ALT
 LENGTHS SEE NOTE 4

D CLEARANCE HOLE (TABLE 1)
 ALT CLEARANCE HOLE SEE NOTE 6

SERIES PREFIX


TABLE 1 DIMENSIONS

| SIZE DASH NO. | Ø I.D. +.005 -.005 /6/ | Ø A +.020 -.020 | Ø B +.010 -.010 |
|---------------------|---------------------------------|-----------------------|-----------------------|
| -101 | .153 | .550 | .253 |
| -103 | .179 | .550 | .379 |
| -105 | .202 | .600 | .302 |
| -107 | .217 | .600 | .317 |
| -109 | .265 | .670 | .365 |
| -111 | .280 | .670 | .380 |
| -113 | .327 | .730 | .427 |
| -115 | .342 | .730 | .442 |
| -117 | .390 | .800 | .490 |
| -119 | .405 | .800 | .505 |
| -121 | .452 | .850 | .552 |
| -123 | .467 | .850 | .567 |
| -125 | .515 | .920 | .615 |
| -127 | .530 | .920 | .630 |
| -129 | .640 | 1.050 | .740 |
| -131 | .655 | 1.050 | .755 |
| -133 | .765 | 1.170 | .865 |
| -135 | .780 | 1.170 | .880 |

TABLE 2
SEE NOTE 4

| DASH NO. | L ±.010 LENGTH |
|-------------|-------------------|
| -4 | .250 |
| -5 | .312 |
| -6 | .375 |
| -7 | .437 |
| -8 | .500 |
| -9 | .563 |
| -10 | .625 |
| -11 | .687 |
| -12 | .750 |
| -13 | .812 |
| -14 | .875 |
| -15 | .937 |
| -16 | 1.000 |

GENERAL NOTES:

- INSTALLATION TABS ARE INCLUDED.
- TOLERANCES .XXX = ±.010
.XX = ±.02
- /3/ BURRS AROUND POTTING HOLES OR SLOTS PERMISSIBLE UNDER FLANGE
- LENGTH DASH NO IN 1/16 INCREMENTS FOR OTHER LENGTHS USE .XXX
 CALLOUT AS SHOWN:
 352-105-400-SS
 └── LENGTH
- /5/ STRAIGHT OR DIAMOND ANTIROTATIONAL KNURL, SHORTER LENGTHS KNURL OPTIONAL (MANUFACTURER'S OPTION).
- /6/ FOR ALTERNATE CLEARANCE HOLE USE .XXX CALLOUT AS SHOWN:
 352-439-16-SS
 └── HOLE
 (TOLERANCES MAY VARY ON ALTERNATE HOLE SIZES)

WITTEN FASTENERS

354 SERIES THRU-HOLE THREADED INSERT W/ FLANGE

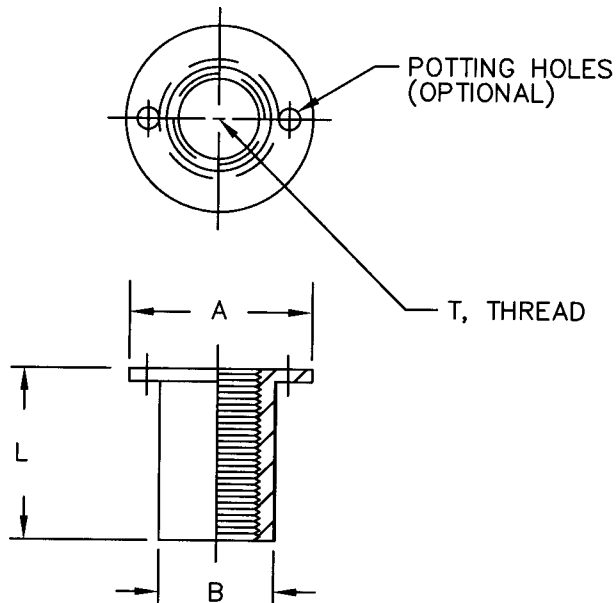



TABLE I

| CODE NO. | T THREAD | A DIA ±.010 | B DIA +.010 -.000 | INSTALL HOLE +.010 -.000 |
|----------|-------------|-------------------|-------------------------|--------------------------------|
| 440 | 4-40 UNC | .487 | .177 | .187 |
| 632 | 6-32 UNC | .518 | .208 | .218 |
| 832 | 8-32 UNC | .550 | .240 | .250 |
| 1032 | 10-32 UNF | .581 | .271 | .281 |
| 420 | 1/4-20 UNC | .643 | .333 | .343 |
| 428 | 1/4-28 UNF | .643 | .333 | .343 |
| 518 | 5/16-18 UNC | .737 | .427 | .437 |
| 524 | 5/16-24 UNF | .737 | .427 | .437 |
| 616 | 3/8-16 UNC | .800 | .490 | .500 |
| 624 | 3/8-24 UNF | .800 | .490 | .500 |
| 714 | 7/16-14 UNC | .862 | .552 | .562 |
| 720 | 7/16-20 UNF | .862 | .552 | .562 |
| 813 | 1/2-13 UNC | .925 | .615 | .625 |
| 820 | 1/2-20 UNF | .925 | .615 | .625 |

TABLE II

| DASH NO. | L ±.030 |
|----------|------------|
| -4 | .250 |
| -5 | .312 |
| -6 | .375 |
| -7 | .437 |
| -8 | .500 |
| -9 | .562 |
| -10 | .625 |
| -11 | .687 |
| -12 | .750 |
| -13 | .812 |
| -14 | .875 |
| -15 | .937 |
| -16 | 1.000 |
| -18 | 1.125 |
| -20 | 1.250 |
| -22 | 1.375 |
| -24 | 1.500 |
| -28 | 1.750 |

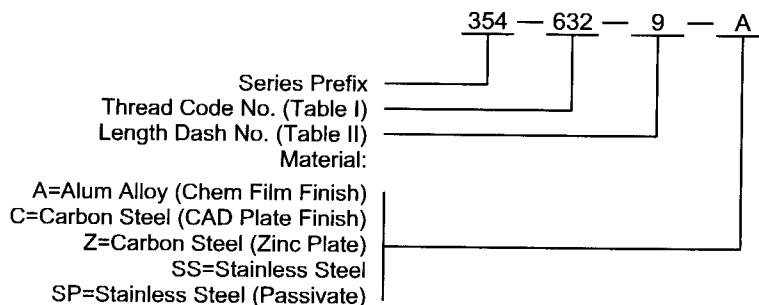EXAMPLE: PART NUMBERING SYSTEM



WITTEN COMPANY, INC.
918-272-9567

WITTEN FASTENERS

355 SERIES THRU-HOLE THREADED INSERT W/ FLANGE

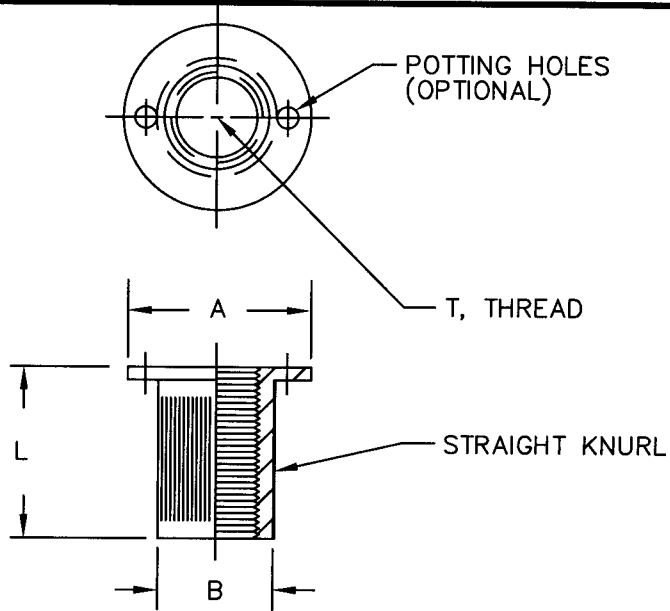



TABLE I

| CODE NO. | T THREAD | A DIA ±.010 | B DIA +.010 -.000 | INSTALL HOLE +.010 -.000 |
|----------|-------------|-------------------|-------------------------|--------------------------------|
| 440 | 4-40 UNC | .487 | .177 | .187 |
| 632 | 6-32 UNC | .518 | .208 | .218 |
| 832 | 8-32 UNC | .550 | .240 | .250 |
| 1032 | 10-32 UNF | .581 | .271 | .281 |
| 420 | 1/4-20 UNC | .643 | .333 | .343 |
| 428 | 1/4-28 UNF | .643 | .333 | .343 |
| 518 | 5/16-18 UNC | .737 | .427 | .437 |
| 524 | 5/16-24 UNF | .737 | .427 | .437 |
| 616 | 3/8-16 UNC | .800 | .490 | .500 |
| 624 | 3/8-24 UNF | .800 | .490 | .500 |
| 714 | 7/16-14 UNC | .862 | .552 | .562 |
| 720 | 7/16-20 UNF | .862 | .552 | .562 |
| 813 | 1/2-13 UNC | .925 | .615 | .625 |
| 820 | 1/2-20 UNF | .925 | .615 | .625 |

TABLE II

| DASH NO. | L ±.030 |
|----------|------------|
| -4 | .250 |
| -5 | .312 |
| -6 | .375 |
| -7 | .437 |
| -8 | .500 |
| -9 | .562 |
| -10 | .625 |
| -11 | .687 |
| -12 | .750 |
| -13 | .812 |
| -14 | .875 |
| -15 | .937 |
| -16 | 1.000 |
| -18 | 1.125 |
| -20 | 1.250 |
| -22 | 1.375 |
| -24 | 1.500 |
| -28 | 1.750 |

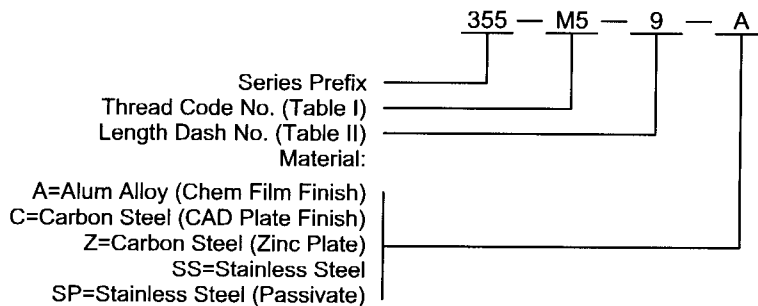EXAMPLE: PART NUMBERING SYSTEM



WITTEN FASTENERS

355 SERIES-METRIC THRU-HOLE THREADED INSERT W/ FLANGE

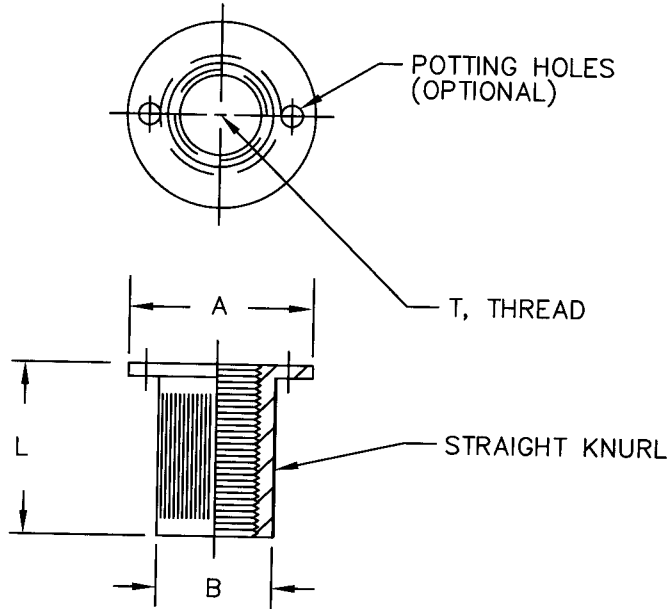



TABLE I

| CODE NO. | T THREAD | A DIA ±.010 | B DIA +.010 -.000 | INSTALL HOLE +.010 -.000 |
|----------|------------|----------------|----------------------|-----------------------------|
| M2.5 | M2.5 X .45 | .487 | .177 | .187 |
| M3 | M3 X .5 | .518 | .208 | .218 |
| M4 | M4 X .7 | .550 | .240 | .250 |
| M5 | M5 X .8 | .581 | .271 | .281 |
| M6 | M6 X 1 | .643 | .333 | .343 |
| M8 | M8 X 1.25 | .737 | .427 | .437 |
| M10 | M10 X 1.5 | .800 | .490 | .500 |
| M12 | M12 X 1.75 | .862 | .552 | .562 |
| M14 | M14 X 2.0 | .925 | .615 | .625 |

TABLE II

| DASH NO. | L ±.030 |
|----------|------------|
| -4 | .250 |
| -5 | .312 |
| -6 | .375 |
| -7 | .437 |
| -8 | .500 |
| -9 | .562 |
| -10 | .625 |
| -11 | .687 |
| -12 | .750 |
| -13 | .812 |
| -14 | .875 |
| -15 | .937 |
| -16 | 1.000 |
| -18 | 1.125 |
| -20 | 1.250 |
| -22 | 1.375 |
| -24 | 1.500 |
| -28 | 1.750 |

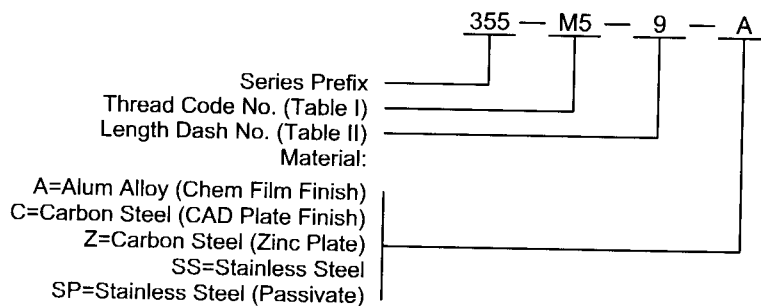EXAMPLE: PART NUMBERING SYSTEM



WITTEN COMPANY, INC.
918-272-9567

2004 SERIES - "SPIRAL RIB" THRU - HOLE

MOLDED-IN OR POTTED-IN INSERT, FLUSH MOUNTED BOTH SIDES

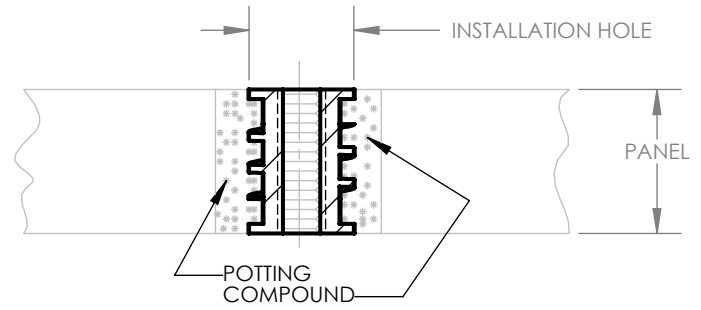
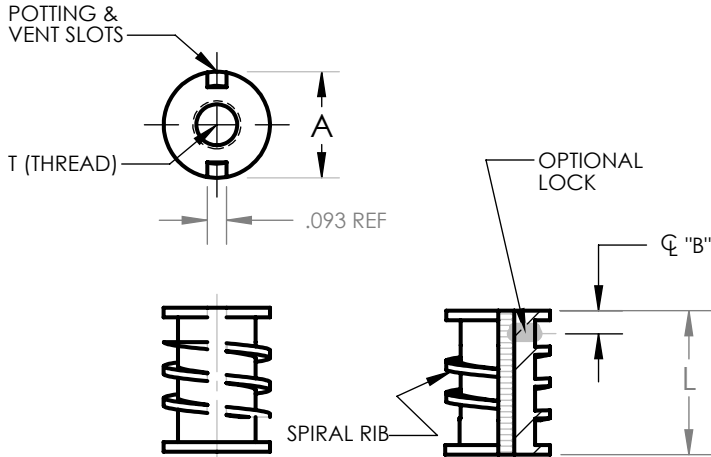


TABLE I

| CODE NO. | T THREAD | A DIA ±.010 | B SELF-LK ±.06 | INSTR HOLE SIZE +.010/- .000 |
|----------|--------------|----------------|-------------------|---------------------------------|
| 632 | 6-32 UNJC | .490 | .12 | .500 |
| 832 | 8-32 UNJC | .490 | .12 | .500 |
| 1032 | 10-32 UNJF | .520 | .12 | .530 |
| 420 | 1/4-20 UNJC | .583 | .16 | .593 |
| 428 | 1/4-28 UNJF | .583 | .16 | .593 |
| 518 | 5/16-18 UNJC | .646 | .20 | .656 |
| 524 | 5/16-24 UNJF | .646 | .20 | .656 |
| 616 | 3/8-16 UNJC | .708 | .20 | .718 |
| 624 | 3/8-24 UNJF | .708 | .20 | .718 |
| 714 | 7/16-14 UNJC | .771 | .20 | .781 |
| 720 | 7/16-20 UNJF | .771 | .20 | .781 |
| 813 | 1/2-13 UNJC | .833 | .20 | .843 |
| 820 | 1/2-20 UNJF | .833 | .20 | .843 |

TABLE II

| DASH NO. | L±.03 LENGTH |
|----------|--------------|
| -5 | .312 |
| -6 | .375 |
| -7 | .437 |
| -8 | .500 |
| -10 | .625 |
| -12 | .750 |
| -14 | .875 |
| -16 | 1.000 |
| -18 | 1.125 |
| -20 | 1.250 |
| -22 | 1.375 |
| -24 | 1.500 |

EXAMPLE PART NUMBERING SYSTEM:

2004 - 420 - L - 12 - SS

SERIES PREFIX

THREAD CODE (TABLE I)

ADD LK FOR SELF-LOCK (NYLON)
ADD L FOR SELF-LOCK (METALLIC CRIMP)

LENGTH DASH NUMBER (TABLE II)

MATERIAL:

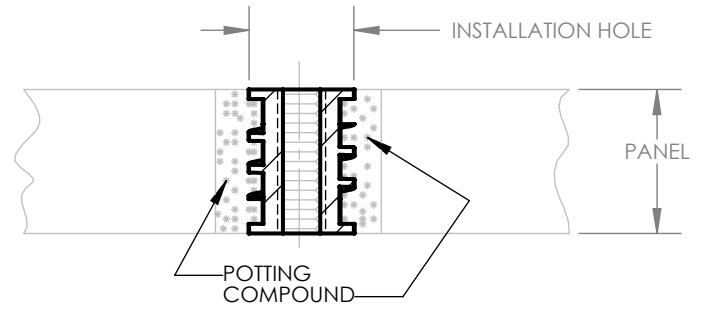
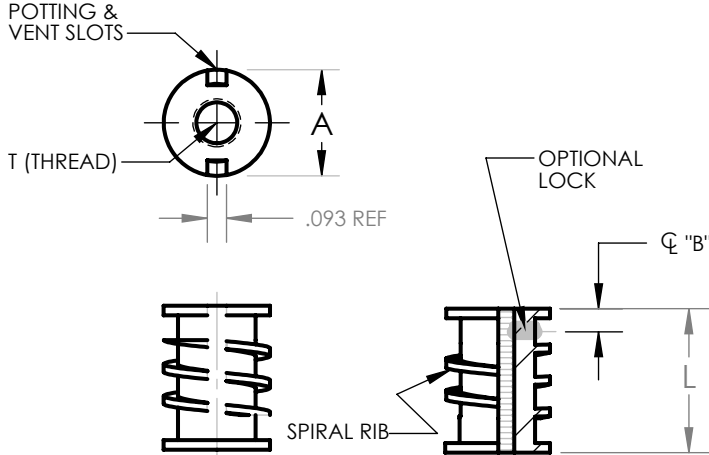
A = ALUMINUM ALLOY (CHEM FILM FINISH)
C = CARBON STEEL (CAD PLATE FINISH)
Z = CARBON STEEL (ZINC PLATE)
SS = STAINLESS STEEL (PLAIN FINISH)
SP = STAINLESS STEEL (PASSIVATED)

NOTE:

1. ALL DIMENSIONS ARE IN INCHES EXCEPT THREAD SIZE.
2. FOR PARTS .625 & SHORTER THE OD HAS CIRCULAR RIBS IN LIEU OF SPIRAL RIBS.

METRIC 2004 SERIES - "SPIRAL RIB" THRU - HOLE

MOLDED-IN OR POTTED-IN INSERT, FLUSH MOUNTED BOTH SIDES



| CODE NO. | T THREAD | A DIA ±.010 | B SELF-LK ±.06 | INSTL HOLE SIZE +.005/- .000 |
|----------|----------|----------------|-------------------|---------------------------------|
| M3.5 | M3.5X.6 | .490 | .12 | .500 |
| M4 | M4X.7 | .490 | .12 | .500 |
| M5 | M5X.8 | .520 | .12 | .530 |
| M6 | M6X1 | .583 | .16 | .593 |
| M8 | M8X1.25 | .646 | .20 | .656 |
| M10X1.25 | M10X1.25 | .708 | .20 | .718 |
| M10X1.5 | M10X1.5 | .708 | .20 | .718 |
| M12X1.5 | M12X1.5 | .833 | .20 | .843 |
| M12X1.75 | M12X1.75 | .833 | .20 | .843 |
| M14X1.5 | M14X1.5 | .895 | .20 | .906 |
| M14X2.0 | M14X2.0 | .895 | .20 | .906 |
| M16X1.5 | M16X1.5 | .958 | .22 | .968 |
| M16X2 | M16X2 | .958 | .22 | .968 |

| DASH NO. | L±.03 LENGTH |
|----------|--------------|
| -5 | .312 |
| -6 | .375 |
| -7 | .437 |
| -8 | .500 |
| -10 | .625 |
| -12 | .750 |
| -14 | .875 |
| -16 | 1.000 |
| -18 | 1.125 |
| -20 | 1.250 |
| -22 | 1.375 |
| -24 | 1.500 |

EXAMPLE PART NUMBERING SYSTEM:

2004 - M6 - L - 12 - SS

SERIES PREFIX

THREAD CODE (TABLE I)

ADD LK FOR SELF-LOCK (NYLON)
ADD L FOR SELF-LOCK (METALLIC CRIMP)

LENGTH DASH NUMBER (TABLE II)

MATERIAL:

A = ALUMINUM ALLOY (CHEM FILM FINISH)
C = CARBON STEEL (CAD PLATE FINISH)
Z = CARBON STEEL (ZINC PLATE)
SS = STAINLESS STEEL (PLAIN FINISH)
SP = STAINLESS STEEL (PASSIVATED)

NOTE:

1. ALL DIMENSIONS ARE IN INCHES EXCEPT THREAD SIZE.
2. FOR PARTS .625 & SHORTER THE OD HAS CIRCULAR RIBS IN LIEU OF SPIRAL RIBS.

WITTEN COMPANY, INC.

2005 SERIES INSERT THRU-HOLE W/ FLANGE

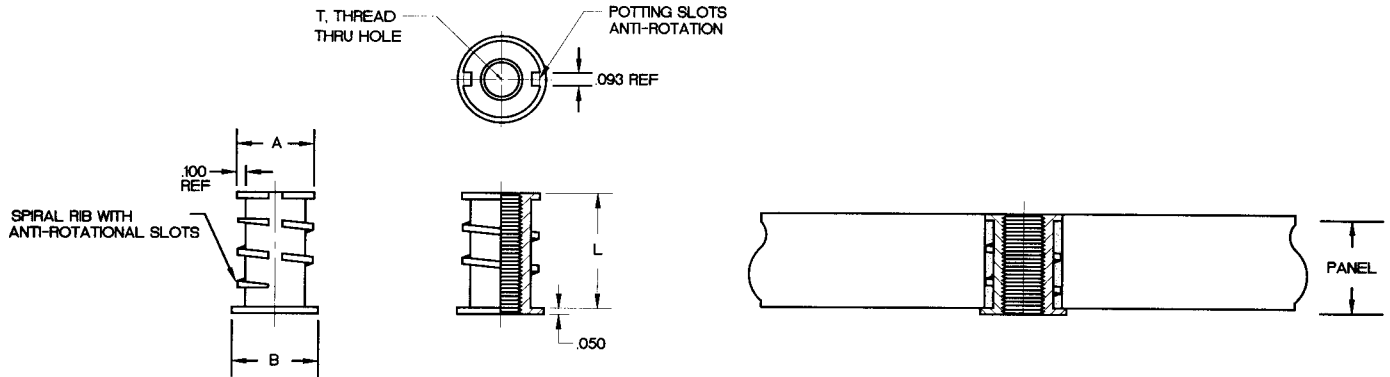


TABLE I

| CODE NO. | T THREAD | A DIA ±.010 | B DIA | L LENGTH +.010 -.000 | INSTALL HOLE +.010 -.000 | MATERIAL | FINISH |
|----------|----------------|----------------|-------|-------------------------|-----------------------------|------------------|-----------|
| -1 | .375-16 UNC-3B | .708 | .830 | .500 | .718 | 303 STAINLESS | NONE |
| -2 | .250-20 UNC-3B | .600 | .722 | .500 | .609 | 303 STAINLESS | NONE |
| -3 | .375-16 UNC-3B | .708 | .830 | .500 | .718 | 12L14 CARBON STL | CAD-PLATE |
| -4 | .250-20 UNC-3B | .600 | .722 | .750 | .609 | 303 STAINLESS | NONE |
| -5 | .250-20 UNC-3B | .600 | .722 | 1.000 | .609 | 303 STAINLESS | NONE |
| -6 | .250-28 UNF-3B | .600 | .722 | .750 | .609 | 303 STAINLESS | NONE |
| -7 | .250-20 UNC-3B | .600 | .722 | 1.500 | .609 | 303 STAINLESS | NONE |
| -8 | .375-16 UNC-3B | .708 | .830 | 1.000 | .718 | 303 STAINLESS | NONE |
| -9 | M8x1.25mm | .660 | .780 | .500 | .671 | 303 STAINLESS | NONE |
| -10 | | | | | | | |
| -11 | .250-20 UNC-3B | .600 | .722 | 1.250 | .609 | 303 STAINLESS | PASSIVATE |
| -12 | .437-14 UNC-3B | .771 | .895 | 1.250 | .781 | 303 STAINLESS | PASSIVATE |
| -13 | .375-16 UNC-3B | .708 | .830 | 1.250 | .718 | 303 STAINLESS | PASSIVATE |
| -14 | .500-13 UNC-3B | .833 | .955 | 1.250 | .843 | 303 STAINLESS | PASSIVATE |

NOTE: 1. BOTTOM SIDE OF INSTALLATION HOLE COULD BE COUNTERBORED FOR FLUSH INSTALLATION IF DESIRED.

2. PATENT NO'S 4,941,785 & 5,082,405.

2235 SERIES

POTTED RIVET NUT

APPLICATION - "THESE FASTENERS ARE DESIGNED TO BE PULLED AND EPOXIED IN PLACE."

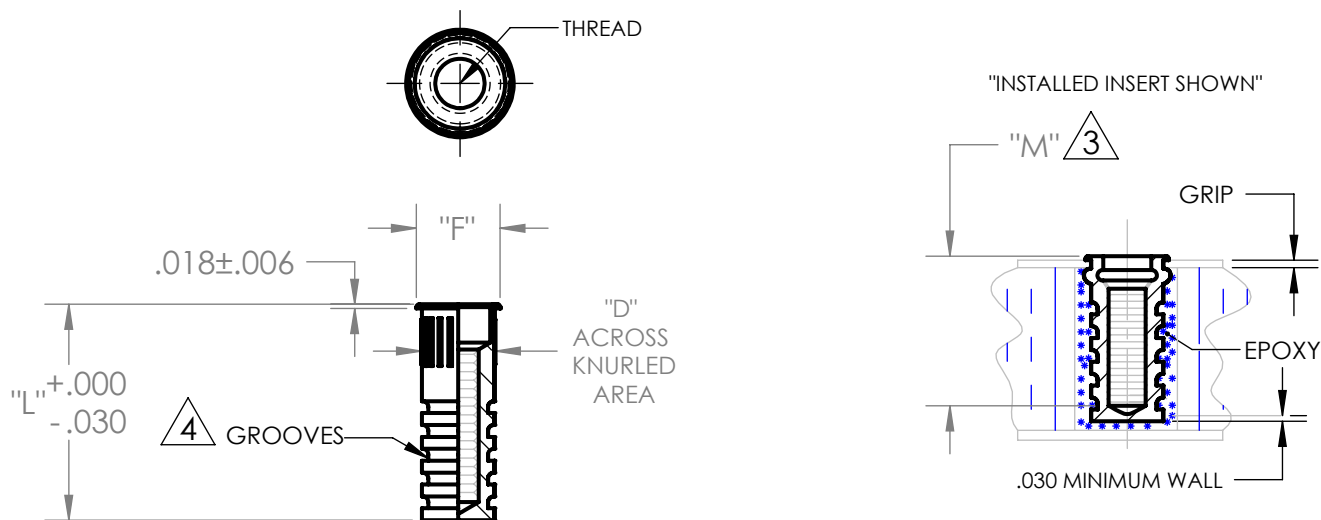



TABLE I

| THREAD CODE | THREAD SIZE | "D" +.000/-0.006 | "F" +.030/-0.000 | M  | INSTALLATION HOLE |
|-------------|----------------|---------------------|---------------------|---|-------------------|
| 1032 | .190-32UNJF-3B | .296 | .326 | .330 | .297 - .303 |
| 420 | .250-20UNJC-3B | .390 | .420 | .390 | .390 - .396 |
| 428 | .250-28UNJF-3B | .390 | .420 | .390 | .390 - .396 |
| 518 | .312-18UNJC-3B | .530 | .560 | .370 | .531 - .537 |
| 524 | .312-24UNJF-3B | .530 | .560 | .370 | .531 - .537 |
| 616 | .375-16UNJC-3B | .530 | .560 | .370 | .531 - .537 |
| 624 | .375-24UNJF-3B | .530 | .560 | .370 | .531 - .537 |

(EXAMPLE) **PART NUMBER CODE:**

2235-428-1.125-C-060

SERIES _____

THREAD CODE _____

INSERT LENGTH _____

FINISH (TO BE SPECIFIED) _____
(C=CAD PLATE)

GRIP LENGTH (TO BE SPECIFIED) _____
(TOLERANCE ±.025")

NOTES:

1. MATERIAL IS 1008 CARBON STEEL PER ASTM-A-108
2. GRIP RANGE :
MINIMUM SKIN THICKNESS = .030
MAXIMUM SKIN THICKNESS = .300

 "M" DENOTES MINIMUM THREAD DEPTH, BASED ON .030 GRIP & .75 LONG INSERT

 NUMBER OF GROOVES VARY WITH LENGTH



WITTEN COMPANY, INC
www.wittenco.com

APPROVAL DATE: REV A 5/22/2023


CAGE CODE 0JHK5

2253H 2253HE

INSERT, POTTED-IN BLIND THREADED


CROSS REFERENCE

| WITTEN | STANDARDS/OTHER | SHUR-LOK | THE YOUNG ENGINEERS | ALCOA/TRIDAIR |
|-----------------|-----------------|----------|---------------------|---------------|
| 2253H 2253HE | | | TYE1400 TYE1400H | 400H 400HE |

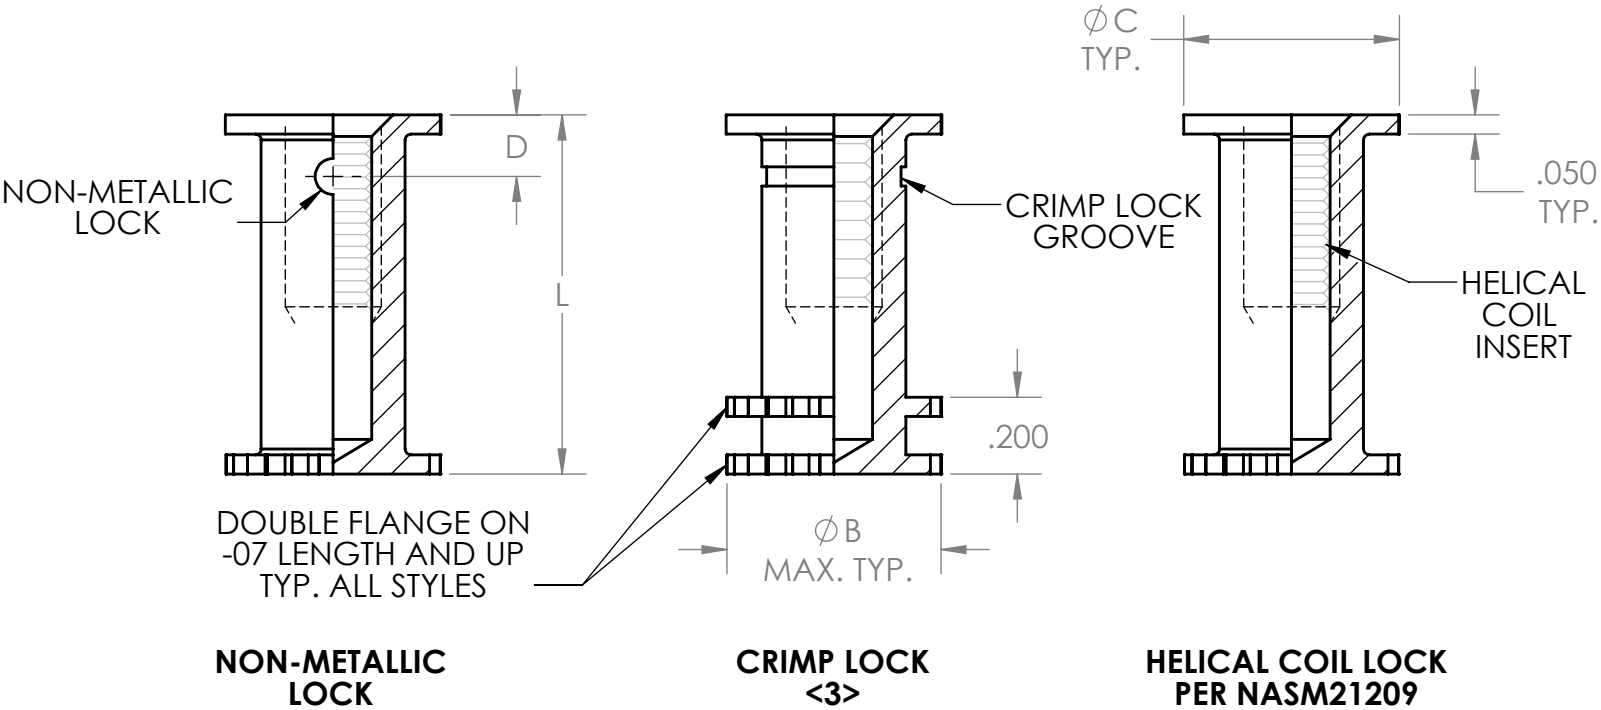


HEAD STYLES:

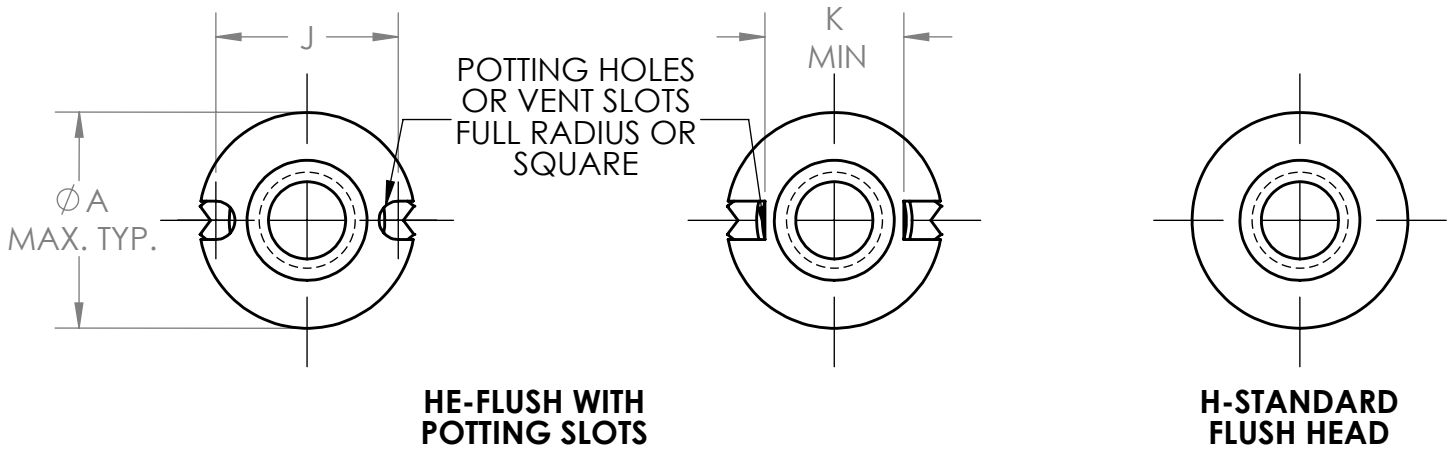SLOT STYLE AT MFG OPTION




DETAIL SLOT OPTION



OPTION FOR SHORT PARTS:

SHORT LENGTH INSERTS MAY INCORPORATE SAME MATERIAL AND FINISH SHIM OR DISK TO PROVIDE FULL THREADS



2253H 2253HE

INSERT, POTTED-IN BLIND THREADED

CROSS REFERENCE


| WITTEN | STANDARDS/OTHER | SHUR-LOK | THE YOUNG ENGINEERS | ALCOA/TRIDAIR |
|-----------------|-----------------|----------|-----------------------|---------------|
| 2253H 2253HE | | | TYE1 400 TYE1 400H | 400H 400HE |

TABLE 1

| SIZE | THREAD | A DIA MAX | B DIA MAX | C DIA REF | D | J | K MIN | INSTALLATION TAB NO. | INSTALLATION DRILL DIA. +.005 -.000 |
|------|--------------------|-----------------|-----------------|-----------------|------|------|----------|-------------------------|--|
| 440 | .1120-40 UNJC - 3B | .374 | .322 | .195 | .100 | .280 | .173 | 2007-280 | .375 |
| 632 | .1380-32 UNJC - 3B | .436 | .385 | .230 | .120 | .343 | .236 | 2007-343 | .437 |
| 832 | .1640-32 UNJC - 3B | .499 | .447 | .290 | .120 | .405 | .298 | 2007-405 | .500 |
| 1032 | .1900-32 UNJF - 3B | .499 | .447 | .290 | .120 | .405 | .298 | 2007-405 | .500 |
| 428 | .2500-28 UNJF - 3B | .561 | .510 | .353 | .140 | .467 | .360 | 2007-467 | .562 |
| 524 | .3125-24 UNJF - 3B | .686 | .635 | .460 | .150 | .591 | .484 | 2007-591 | .687 |
| 624 | .3750-24 UNJF - 3B | .811 | .697 | .550 | .160 | .718 | .611 | 2007-718 | .812 |

GENERAL NOTES:

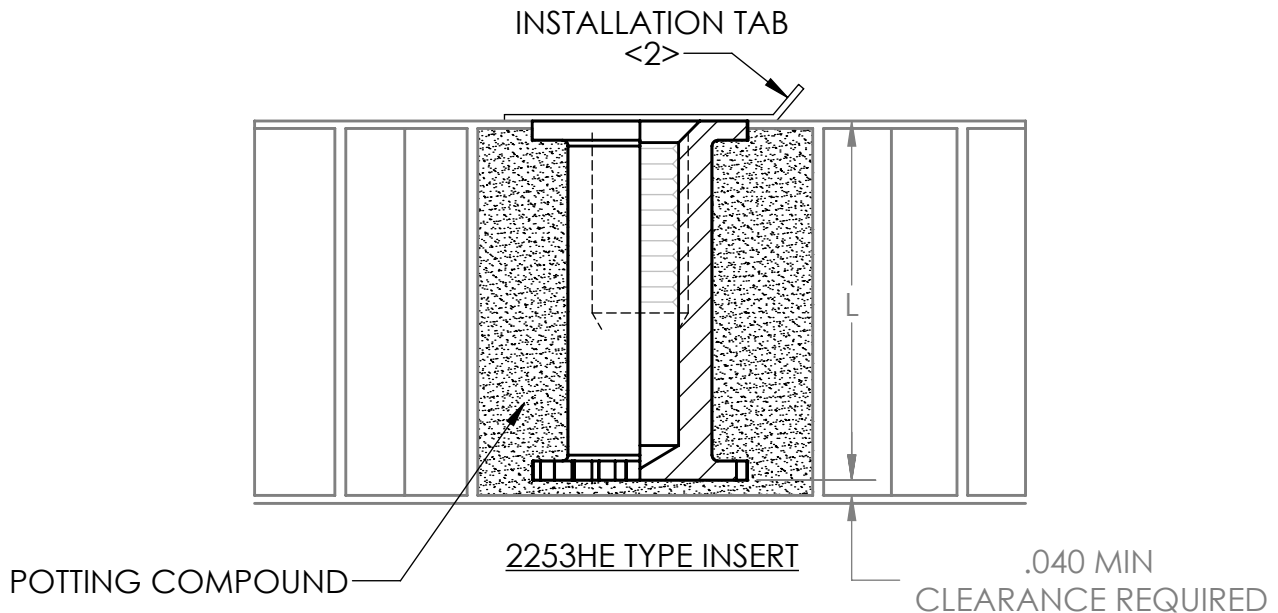1. BURRS PERMISSIBLE AT KNURLED AREAS AND ON UNDERSIDE OF HEAD AROUND POTTING SLOTS.
- <2> ADHESIVE BACKED INSTALLATION TABS PER TABLE 1 ARE FURNISHED WITH INSERTS.
- <3> CRIMP LOCK AVAILABLE IN 303 CRES AND CARBON STEEL ONLY.
4. PLATING OR SOLID FILM LUBE IS RECOMMENDED ON SELF-LOCKING CRES INSERTS.
- <5> CLOSE OUT DISC MAY BE REQUIRED IN SOME LENGTHS TO PROVIDE MINIMUM FULL THREAD.
6. LOCATE LOCKING PELLET NO CLOSER THAN 10° FROM EDGE OF EITHER POTTING SLOT.
7. CONSULT WITTEN ENGINEERING DEPARTMENT FOR AVAILABILITY OR OPTIONAL MATERIALS, FINISHES OR SIZES.
8. SURFACE FINISH TO BE 125 MICROINCHES.



2253H 2253HE

INSERT, POTTED-IN BLIND THREADED

CROSS REFERENCE


| WITTEN | STANDARDS/OTHER | SHUR-LOK | THE YOUNG ENGINEERS | ALCOA/TRIDAIR |
|-----------------|-----------------|----------|---------------------|---------------|
| 2253H 2253HE | | | TYE1400 TYE1400H | 400H 400HE |

| TABLE 2 | | "X" INDICATES NOT AVAILABLE | | | | | | | |
|-----------------|------|--|------|------|------|------|------|------|--|
| LENGTH DASH NO. | L | MIN FULL THREAD LENGTH (EXCEPT HELICAL COIL) | | | | | | | |
| | | 440 | 632 | 832 | 1032 | 428 | 524 | 624 | |
| <5> -04 | .220 | .170 | .170 | .170 | .170 | X | X | X | |
| -05 | .285 | .190 | .190 | .190 | .190 | .235 | X | X | |
| -06 | .335 | .225 | .235 | .235 | .235 | .250 | X | X | |
| -07 | .395 | .250 | .280 | .280 | .280 | .250 | X | X | |
| -08 | .455 | .250 | .280 | .330 | .330 | .330 | .320 | X | |
| -10 | .565 | .250 | .280 | .330 | .380 | .420 | .430 | .425 | |
| -12 | .690 | .250 | .280 | .330 | .380 | .500 | .550 | .550 | |
| -14 | .815 | .250 | .280 | .330 | .380 | .500 | .625 | .625 | |
| -16 | .935 | .250 | .280 | .330 | .380 | .500 | .625 | .750 | |

| TABLE 3 | | "X" INDICATES NOT AVAILABLE | | | | | | | |
|-----------------|------|---------------------------------|------|------|------|------|------|------|--|
| LENGTH DASH NO. | L | HELICOIL MIN FULL THREAD LENGTH | | | | | | | |
| | | 440 | 632 | 832 | 1032 | 428 | 524 | 624 | |
| -04 | .220 | X | X | X | X | X | X | X | |
| -05 | .285 | X | X | X | X | X | X | X | |
| -06 | .335 | .112 | X | X | X | X | X | X | |
| -07 | .395 | .168 | .138 | X | X | X | X | X | |
| -08 | .455 | .224 | .207 | .164 | .190 | X | X | X | |
| -10 | .565 | .224 | .276 | .246 | .285 | .250 | X | X | |
| -12 | .690 | .224 | .276 | .328 | .380 | .375 | .312 | X | |
| -14 | .815 | .224 | .276 | .328 | .380 | .500 | .469 | .375 | |
| -16 | .935 | .224 | .276 | .328 | .380 | .500 | .469 | .562 | |

PART CODE AND EXAMPLE:

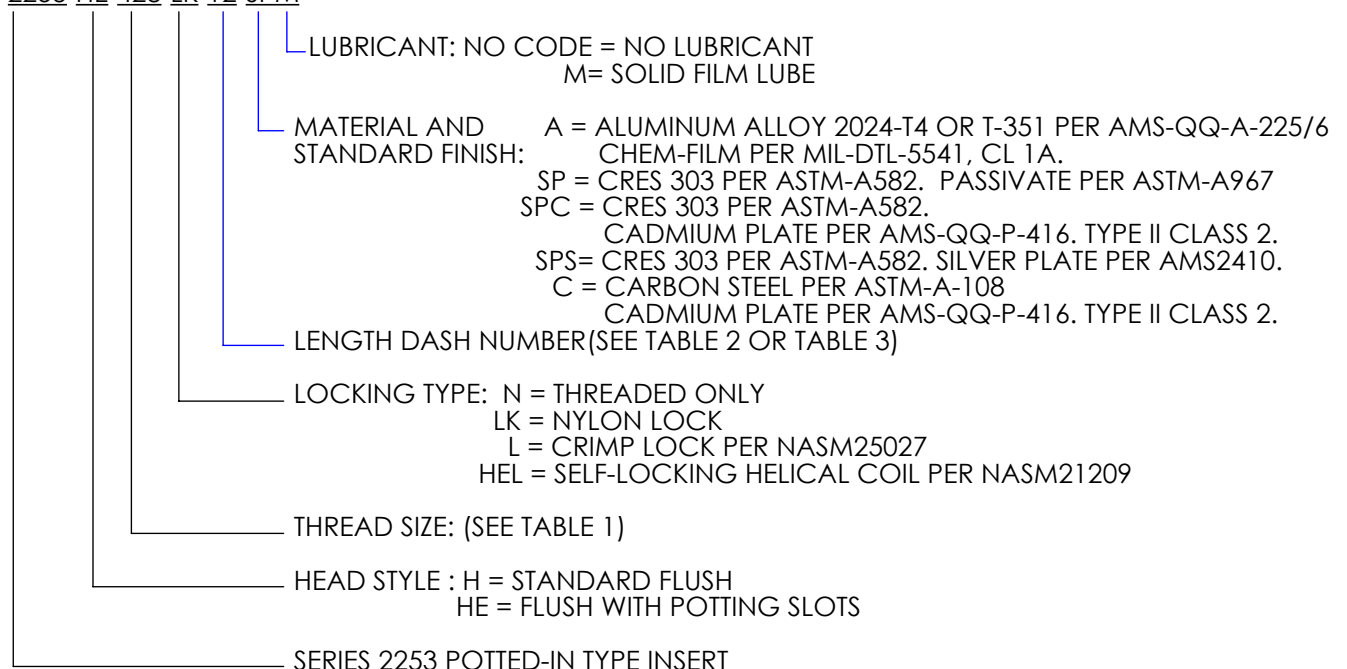2253-HE-428-LK-12-SPM



2253-S,SE

INSERT, BLIND, SNAP-IN, THREADED, SELF-LOCKING
NONSELF-LOCKING, SANDWICH PANEL

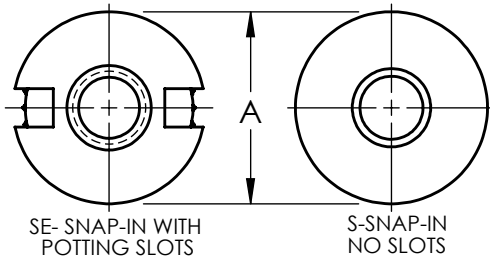
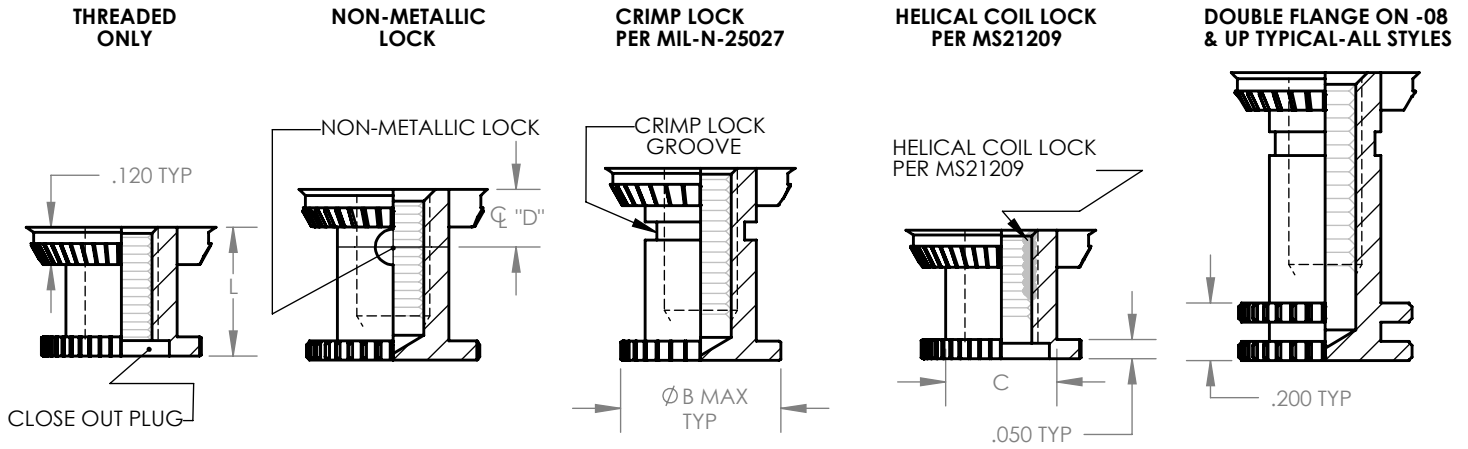



TABLE 1

| SIZE | THREAD SIZE PER AS8879, CLASS 3B | A HEAD DIA | B FLANGE DIA | C BODY DIA | D LOCK CENTERLINE |
|------|----------------------------------|------------|--------------|------------|-------------------|
| 440 | .1120-40 UNJC-3B | .375 | .312 | .195 | .165* |
| 632 | .1380-32 UNJC-3B | .437 | .375 | .230 | .175* |
| 832 | .1640-32 UNJC-3B | .500 | .437 | .290 | .185* |
| 1032 | .1900-32 UNJF-3B | .500 | .437 | .290 | .185* |
| 428 | .2500-28 UNJF-3B | .562 | .500 | .353 | .190 |
| 524 | .3125-24 UNJF-3B | .687 | .625 | .460 | .200 |
| 624 | .3750-24 UNJF-3B | .812 | .687 | .550 | .200 |

*REDUCE "D" DIMENSION BY .030 WHEN ORDERING -04 LENGTHS IN SIZES 440 - 1032

PART NUMBER SELECTION EXAMPLE:

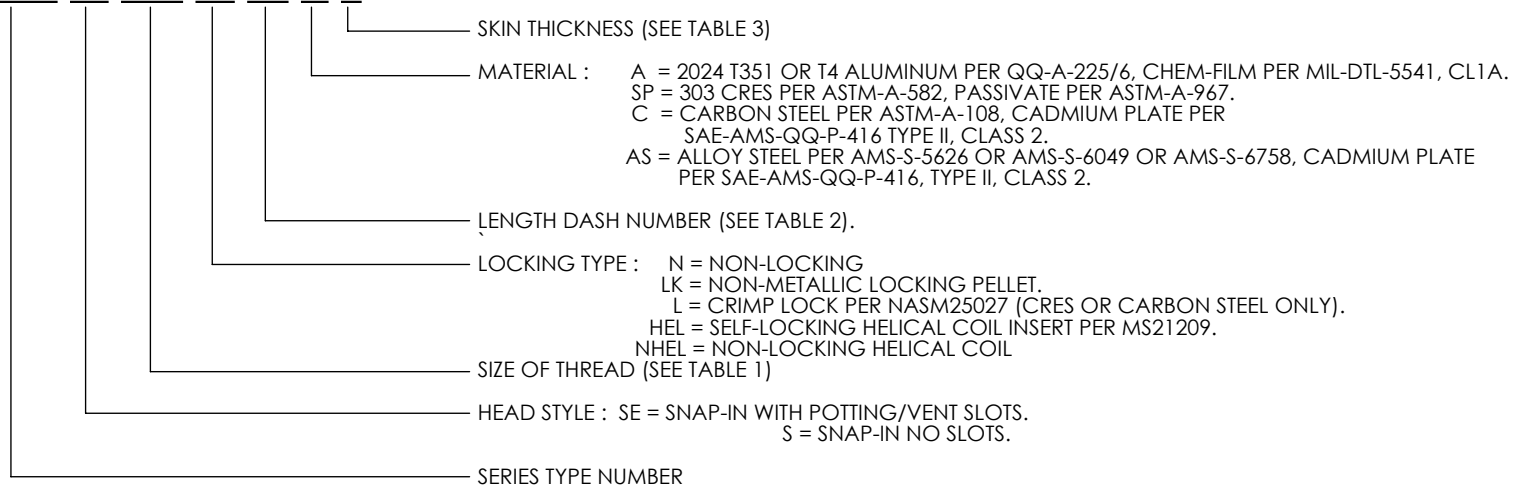2253-SE-832-LK-10-A-2



2253-S,SE

INSERT, SNAP-IN, THREADED, SELF-LOCKING NONSELF-LOCKING, SANDWICH PANEL

TYPICAL INSTALLATION SHOWN:

" TYPICAL 2253-S, SE SNAP-IN INSERT INSTALLED IN HONEY-COMB SANDWICH PANEL. INSERT IS RETAINED BY CURED EPOXY COMPOUND."

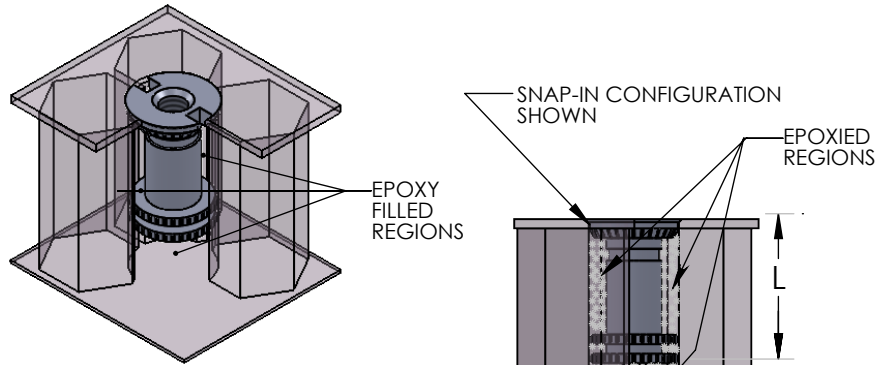


TABLE 2

| ALL THREADED TYPES EXCEPT HELICAL COIL LOCK | | | | | | | | |
|---|------|-------------|------|------|------|------|------|------|
| LENGTH DASH NUMBER | L | THREAD SIZE | | | | | | |
| | | 440 | 632 | 832 | 1032 | 428 | 524 | 624 |
| -04*† | .220 | .170 | .170 | .170 | .170 | - | - | - |
| -05* | .285 | .190 | .190 | .190 | .190 | .235 | - | - |
| -06* | .335 | .225 | .235 | .235 | .235 | .250 | - | - |
| -07 | .395 | .250 | .280 | .280 | .280 | .250 | - | - |
| -08 | .455 | .250 | .280 | .330 | .330 | .330 | .320 | - |
| -10 | .565 | .250 | .280 | .330 | .380 | .420 | .430 | .425 |
| -12 | .690 | .250 | .280 | .330 | .380 | .500 | .550 | .550 |
| -14 | .815 | .250 | .280 | .330 | .380 | .500 | .625 | .750 |
| -16 | .935 | .250 | .280 | .330 | .380 | .500 | .625 | .750 |

*CLOSE OUT PLUG REQUIRED TO PROVIDE MINIMUM FULL THREAD.
† AVAILABLE IN -1, -2, AND -3 SKIN THICKNESS ONLY; SEE TABLE 3 BELOW.

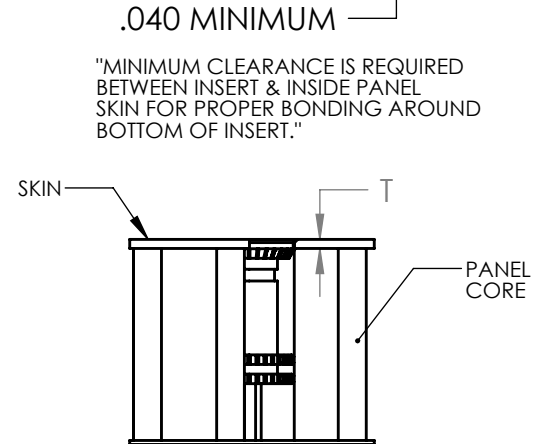


TABLE 3

| SKIN DASH NUMBER | T (THICKNESS) |
|------------------|---------------|
| -1 | .010 - .019 |
| -2 | .020 - .029 |
| -3 | .030 - .039 |
| -4 | .040 - .049 |
| -5 | .050 - .059 |
| -6 | .060 - .069 |


| HELICAL COIL LOCK TYPE | | | | | | | | |
|------------------------|------|-------------|------|------|------|------|------|------|
| LENGTH DASH NUMBER | L | THREAD SIZE | | | | | | |
| | | 440 | 632 | 832 | 1032 | 428 | 524 | 624 |
| -06 | .335 | .112 | - | - | - | - | - | - |
| -07 | .395 | .168 | .138 | - | - | - | - | - |
| -08 | .455 | .224 | .207 | .164 | .190 | - | - | - |
| -10 | .565 | .224 | .276 | .246 | .235 | .250 | - | - |
| -12 | .690 | .224 | .276 | .328 | .380 | .375 | .312 | - |
| -14 | .815 | .224 | .276 | .328 | .380 | .500 | .469 | .375 |
| -16 | .935 | .224 | .276 | .328 | .380 | .500 | .469 | .562 |

2402 SF SERIES


FLOATING INSERT, SNAP-IN HEAD STYLE

CROSS REFERENCE

| WITTEN | STANDARDS/OTHER | SHUR-LOK | THE YOUNG ENGINEERS | ALCOA/TRIDAIR |
|--------|-----------------|----------|---------------------|---------------|
| 2402SF | | | TYE3006 | 400SF |

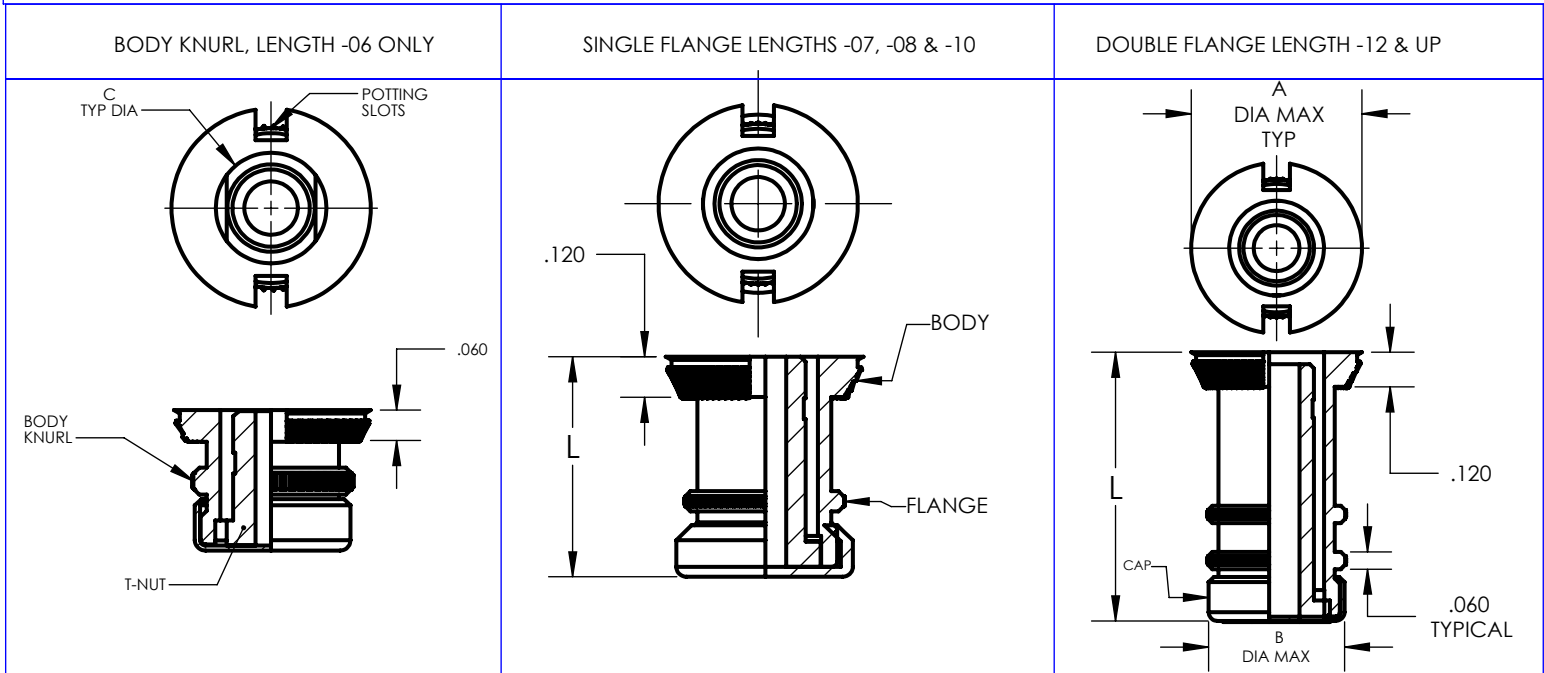

TYPICAL ASSEMBLY:

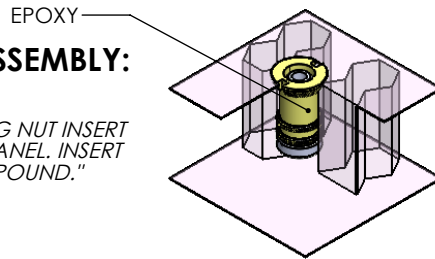

CROSS REFERENCE

"TYPICAL SERIES 2402SF SNAP-IN FLOATING NUT INSERT INSTALLED IN HONEYCOMB SANDWICH PANEL. INSERT IS HELD IN PLACE BY CURED EPOXY COMPOUND."

PART NUMBER EXAMPLE:

2402SF6-1032-08- 2

ADD "NS" IF POTTING SLOTS ARE NOT REQUIRED

SKIN THICKNESS, TABLE II

LENGTH, TABLE III

ADD "M" FOR SOLIDFILM LUBE ON THREADS

THREAD SIZE, TABLE I

THREAD TYPE: N = THREADED ONLY
- = CRIMP LOCK PER MIL-N-25027

MATERIAL FOR NUT

"6"=303 STAINLESS STEEL PER ASTM-A-582, PASSIVATE PER ASTM-A-967

"9"=1215 CARBON STEEL PER ASTM-A-108, CAD PLATE PER SAE-AMS-QQ-P-416 TYPE 2, CLASS 2.

FLUSH HEAD STYLE, SNAP-IN, FLOATING NUT, POTTING SERIES

SERIES DESIGNATION

2402 SF SERIES

FLOATING INSERT, SNAP-IN HEAD STYLE

CROSS REFERENCE

| WITTEN | STANDARDS/OTHER | SHUR-LOK | THE YOUNG ENGINEERS | ALCOA/TRIDAIR |
|--------|-----------------|----------|---------------------|---------------|
| 2402SF | | | TYE3006 | 400SF |

TABLE I

| CODE | T THREAD | A DIA | B DIA | C DIA | INSTALLATION HOLE |
|------|-----------------|----------|----------|----------|----------------------|
| 440 | 4-40 UNJC-3B | .531 | .489 | .323 | .500-.505 |
| 632 | 6-32 UNJC-3B | .531 | .489 | .323 | .500-.505 |
| 832 | 8-32 UNJC-3B | .593 | .551 | .323 | .562-.567 |
| 1032 | 10-32 UNJF-3B | .593 | .551 | .323 | .562-.567 |
| 420 | .25-20 UNJC-3B | .718 | .676 | .437 | .687-.692 |
| 428 | .25-28 UNJF-3B | .718 | .676 | .437 | .687-.692 |
| 518 | .312-18 UNJC-3B | .843 | .801 | .437 | .812-.817 |
| 524 | .312-24 UNJF-3B | .843 | .801 | .437 | .812-.817 |
| 616 | .375-16 UNJC-3B | .968 | .926 | .515 | .937-.942 |
| 624 | .375-24 UNJF-3B | .968 | .926 | .515 | .937-.942 |

TABLE II

| DASH NO. | SKIN THICKNESS "T" |
|----------|--------------------|
| -1 | .010 - .019 |
| -2 | .020 - .029 |
| -3 | .030 - .039 |
| -4 | .040 - .049 |
| -5 | .050 - .059 |
| -6 | .060 - .069 |

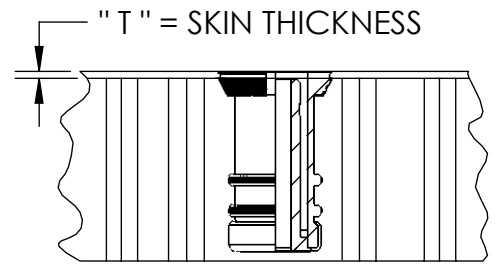


TABLE III (MINIMUM FULL THREAD)

| LENGTH DASH NUMBER | L | THREAD SIZE | | | | | | |
|-----------------------|------|-------------|------|------|------|------------|------------|------------|
| | | 440 | 632 | 832 | 1032 | 420 428 | 518 524 | 616 624 |
| -06 | .335 | .224 | .276 | .292 | .292 | - | - | - |
| -07 | .395 | .224 | .276 | .328 | .350 | .350 | .350 | .350 |
| -08 | .455 | .224 | .276 | .328 | .380 | .410 | .410 | .410 |
| -10 | .565 | .224 | .276 | .328 | .380 | .500 | .520 | .520 |
| -12 | .690 | .224 | .276 | .328 | .380 | .500 | .625 | .645 |
| -14 | .812 | .224 | .276 | .328 | .380 | .500 | .625 | .750 |
| -16 | .935 | .224 | .276 | .328 | .380 | .500 | .625 | .750 |

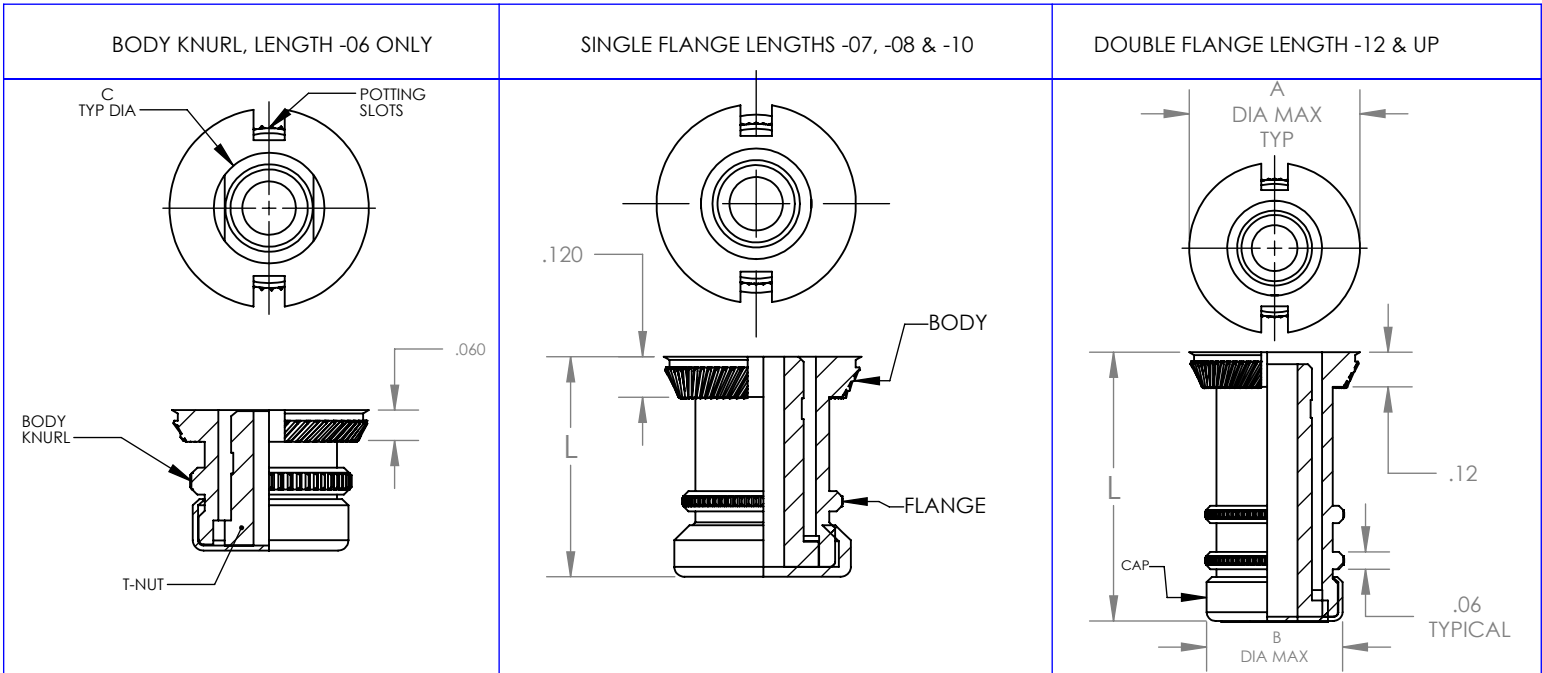
NOTE: 1. MINIMUM RADIAL FLOAT IS .031"

2. TOLERANCES: XXX = +/- .010

3. MATERIAL FOR BODY IS 2024 T351 OR T4 ALUMINUM PER QQ-A-225/6 WITH CHEM FILM PER MIL-DTL-5541F CLASS 1A.


4. MATERIAL FOR CAP IS 2024 T351/T4 OR 6061 T6511, T6, T651 OR T6511 TP "O" CONDITION ALUMINUM WITH CHEM FILM PER MIL-DTL-5541F CLASS 1A.

METRIC 2402 SF SERIES FLOATING INSERT, SNAP-IN HEAD STYLE



TYPICAL ASSEMBLY:

" TYPICAL SERIES 2402SF SNAP-IN FLOATING NUT INSERT INSTALLED IN HONEYCOMB SANDWICH PANEL. INSERT IS HELD IN PLACE BY CURED EPOXY COMPOUND."



PART NUMBER EXAMPLE:

2402SF6-M5-08 2

ADD "NS" IF POTTING SLOTS ARE NOT REQUIRED

SKIN THICKNESS, TABLE II

LENGTH, TABLE III

ADD "M" FOR SOLIDFILM LUBE ON THREADS

THREAD SIZE, TABLE I

THREAD TYPE: N = THREADED ONLY
- = CRIMP LOCK PER MIL-N-25027

MATERIAL FOR NUT

"6"=303 STAINLESS STEEL PER ASTM-A-582, PASSIVATE PER ASTM-A-967

"9"=1215 CARBON STEEL PER ASTM-A-108, CAD PLATE PER SAE-AMS-QQ-P-416 TYPE 2, CLASS 2.

FLUSH HEAD STYLE, SNAP-IN, FLOATING NUT, POTTING SERIES

SERIES DESIGNATION

NOTE: 1. MINIMUM RADIAL FLOAT IS .031"

2. TOLERANCES: XXX = +/- .010

3. MATERIAL FOR BODY IS 2024 T351 OR T4 ALUMINUM PER QQ-A-225/6 WITH CHEM FILM PER MIL-DTL-5541F CLASS 1A.

4. MATERIAL FOR CAP IS 2024 T351 OR T4 OR 6061 T6511 ALUMINUM WITH CHEM FILM PER MIL-DTL-5541F CLASS 1A.

WITTEN COMPANY
918-272-9567

APPROVAL DATE: 3/29/2022

CAGE CODE: 0JHK5

METRIC 2402 SF SERIES FLOATING INSERT, SNAP-IN HEAD STYLE

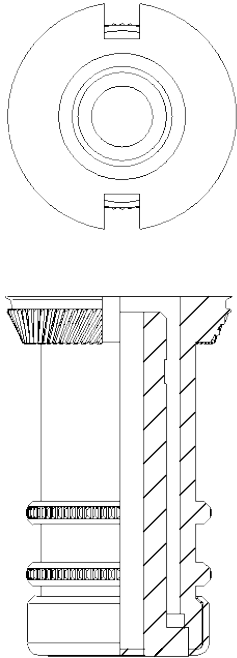


TABLE I

| CODE | T THREAD | A DIA | B DIA | C DIA | INSTALLATION HOLE |
|----------|-------------|----------|----------|----------|----------------------|
| M3 | M3X.05 | .531 | .489 | .323 | .500-.505 |
| M3.5 | M3.5X.6 | .531 | .489 | .323 | .500-.505 |
| M4 | M4X.7 | .593 | .551 | .323 | .562-.567 |
| M5 | M5X.8 | .593 | .551 | .323 | .562-.567 |
| M6 | M6X1 | .718 | .676 | .437 | .687-.692 |
| M8X1 | M8X1 | .843 | .801 | .437 | .812-.817 |
| M8X1.25 | M8X1.25 | .843 | .801 | .437 | .812-.817 |
| M10X1.25 | M10X1.25 | .968 | .926 | .515 | .937-.942 |
| M10X1.5 | M10X1.5 | .968 | .926 | .515 | .937-.942 |

TABLE II

| DASH NO. | SKIN THICKNESS "T" |
|----------|--------------------|
| -1 | .010 - .019 |
| -2 | .020 - .029 |
| -3 | .030 - .039 |
| -4 | .040 - .049 |
| -5 | .050 - .059 |
| -6 | .060 - .069 |


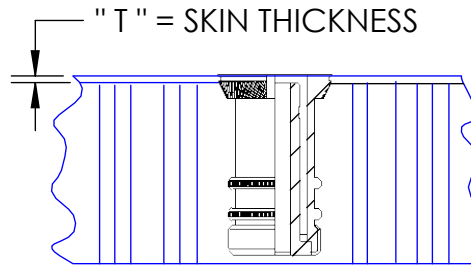
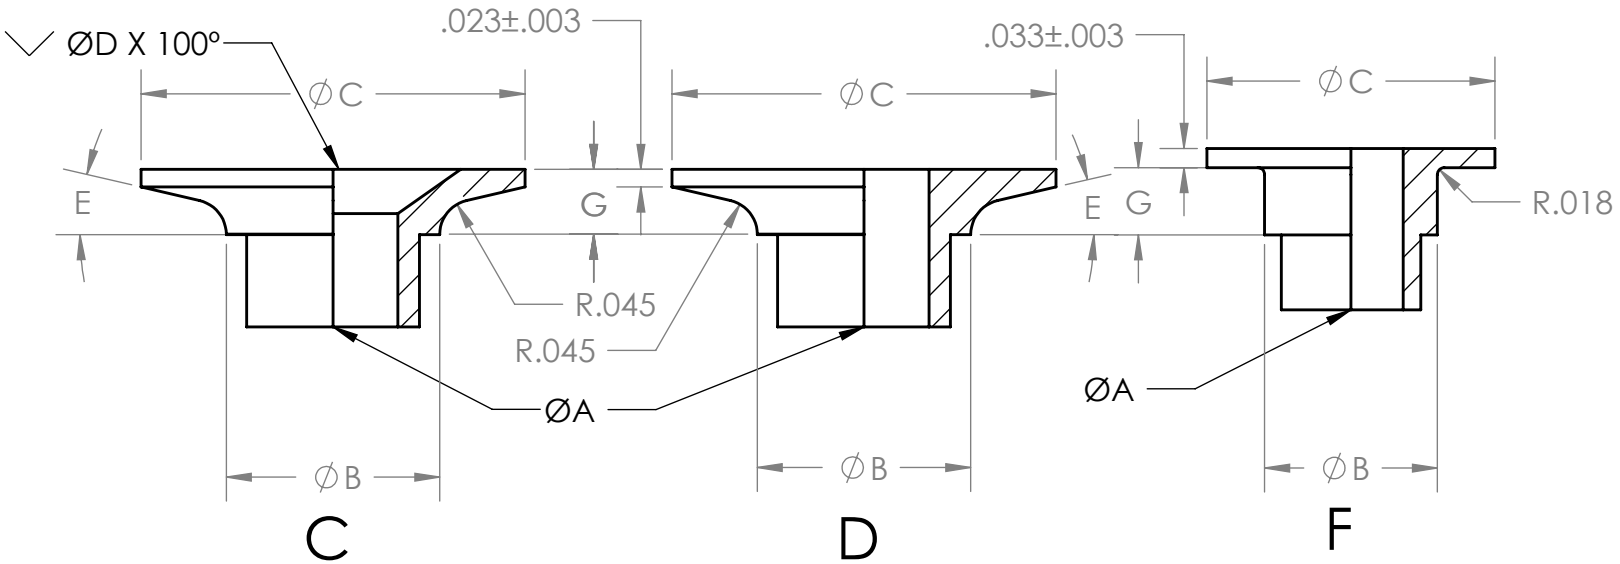


TABLE III (MINIMUM FULL THREAD)


| LENGTH DASH NUMBER | L | THREAD SIZE | | | | | | |
|-----------------------|------|-------------|------|------|------|------|------|------|
| | | M3 | M3.5 | M4 | M5 | M6 | M8 | M10 |
| -06 | .335 | .224 | .276 | .292 | .292 | - | - | - |
| -07 | .395 | .224 | .276 | .328 | .350 | .350 | .350 | .350 |
| -08 | .455 | .224 | .276 | .328 | .380 | .410 | .410 | .410 |
| -10 | .565 | .224 | .276 | .328 | .380 | .500 | .520 | .520 |
| -12 | .690 | .224 | .276 | .328 | .380 | .500 | .625 | .645 |
| -14 | .812 | .224 | .276 | .328 | .380 | .500 | .625 | .750 |
| -16 | .935 | .224 | .276 | .328 | .380 | .500 | .625 | .750 |

W101

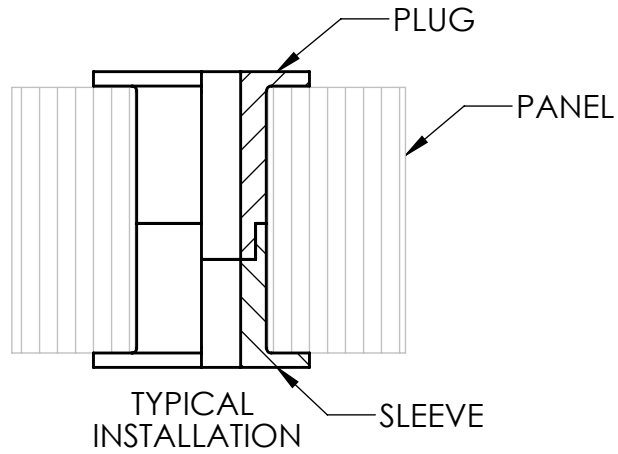INSERT: GROMMET TYPE, THROUGH-RIVET



PLUG HEAD STYLES

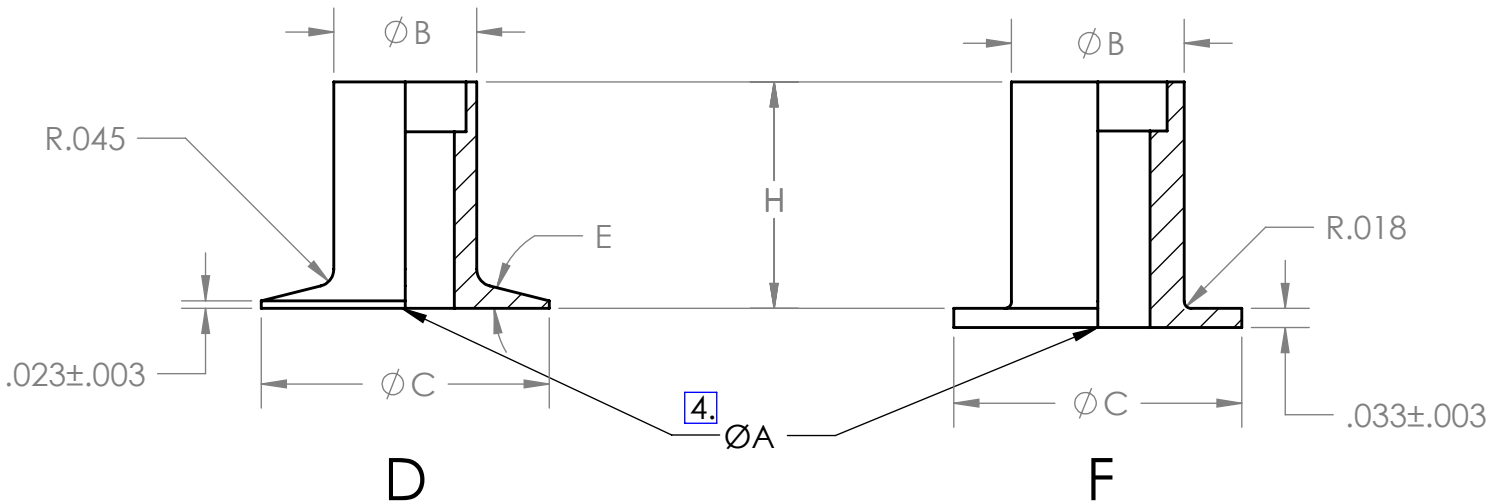

SLEEVE HEAD STYLES

WITTEN COMPANY
918-272-9567

APPROVAL DATE: 11/10/2020

GAGE CODE: 0JHK5


W101

INSERT: GROMMET TYPE, THROUGH-RIVET

PART NUMBER CODING:

WP161D18-0

WS161D18-08

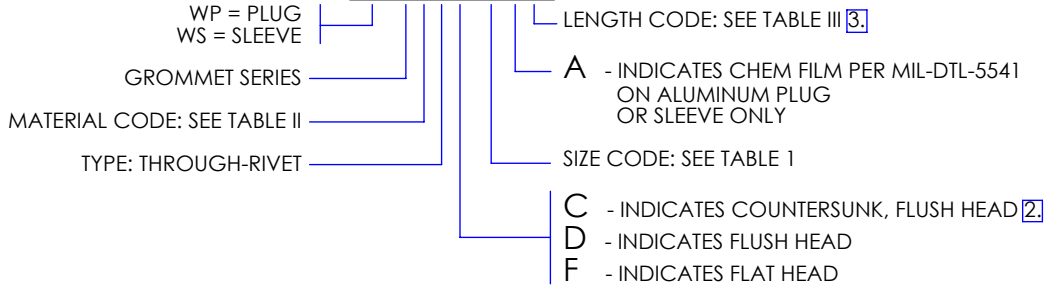
TABLE I

| SIZE CODE | $\varnothing A$ +.002 -.003 | $\varnothing B$ $\pm .002$ | $\varnothing C$ $\pm .005$ | $\varnothing D$ +.003 -.004 | E $\pm 1^\circ$ |
|-----------|-----------------------------------|-------------------------------|-------------------------------|-----------------------------------|--------------------|
| 12 | .133 | .278 | .500 | .233 | 13° |
| 15 | .168 | .278 | .500 | .295 | 13° |
| 18 | .194 | .309 | .625 | .362 | 13° |
| 25 | .256 | .372 | .750 | .486 | 14° |
| 28 | .289 | .403 | .812 | .501 | 14° |
| 31 | .318 | .466 | .875 | .574 | 14° |
| 37 | .381 | .622 | 1.000 | .704 | 14° |

TABLE II

| MATL CODE | MATERIAL | FINISH |
|-----------|--|--|
| 0 | AL ALLOY, GRADE 2024, TEMPER T4 OR T351 PER SAE-AMS-QQ-A-225/6 | ANODIZE PER MIL-A-8625 TYPE I, CLASS 1 |
| 6 | CORROSION RESISTANT STEEL, TYPE 303 CRES PER ASTM A 582 | PASSIVATE PER ASTM-A967 |
| 9 | CARBON STEEL PER ASTM A 108 | CAD PLATE PER SAE-AMS-QQ-P-416, TYPE II, CLASS 2 |

NOTES:

1. ANY COMBINATION OF SLEEVE AND PLUG WITHIN RIVET SIZE MAY BE USED.
- [2] 'C' HEAD STYLE IS AVAILABLE IN PLUG CONFIGURATION ONLY.
- [3] REFER TO TABLE III TO SELECT A PLUG/SLEEVE COMBINATION FOR GIVEN PANEL THICKNESS.
- [4] A SINGLE THROUGH HOLE DIAMETER IS USED FOR -.03 AND -.04 SLEEVE LENGTHS IN 25 AND 28 SIZES.
5. THE W101 GROMMETS ARE SELF-RETAINED THROUGH A TELESCOPE FIT.
6. CONSULT THE WITTEN COMPANY ENGINEERING DEPARTMENT FOR OTHER FINISHES, MATERIALS, OR SIZES.

 WITTEN COMPANY
 918-272-9567

APPROVAL DATE: 11/10/2020

GAGE CODE: 0JHK5

W101

INSERT: GROMMET TYPE, THROUGH-RIVET

TABLE III

| PANEL THICKNESS MINIMUM | LENGTH CODE | PLUG | | | LENGTH CODE | SLEEVE | | |
|-------------------------|-------------|-----------|-------|-------|-------------|-----------|-------|---------------------|
| | | G | | | | H | | |
| | | SIZE CODE | | | | SIZE CODE | | |
| | | 12,15,18 | 25,28 | 31,37 | | 12,15,18 | 25,28 | 31,37 |
| .187 | X | .085 | .120 | NA | 03 | .103 | .067 | NA |
| .250 | 0 | .085 | .120 | NA | 04 | .165 | .130 | NA |
| .265 | 01 | .100 | .135 | | | | | |
| .281 | 1 | .116 | .151 | | | | | |
| .296 | 11 | .131 | .167 | | | | | |
| .312 | 2 | .147 | .183 | | | | | |
| .327 | 21 | .163 | .198 | | | | | |
| .344 | 3 | .179 | .214 | | | | | |
| .359 | 31 | .194 | .230 | | | | | |
| .375 | 0 | .085 | .120 | .190 | 06 | .290 | .255 | 0.185 31 ONLY |
| .390 | 01 | .100 | .135 | .206 | | | | |
| .406 | 1 | .116 | .151 | .221 | | | | |
| .421 | 11 | .131 | .167 | .237 | | | | |
| .437 | 2 | .147 | .183 | .252 | | | | |
| .452 | 21 | .163 | .198 | .268 | | | | |
| .469 | 3 | .179 | .214 | .283 | | | | |
| .484 | 31 | .194 | .230 | .298 | | | | |
| .500 | 0 | .085 | .120 | .190 | 08 | .415 | .380 | .310 |
| .515 | 01 | .100 | .135 | .206 | | | | |
| .531 | 1 | .116 | .151 | .221 | | | | |
| .546 | 11 | .131 | .167 | .237 | | | | |
| .562 | 2 | .147 | .183 | .252 | | | | |
| .577 | 21 | .163 | .198 | .268 | | | | |
| .594 | 3 | .179 | .214 | .283 | | | | |
| .609 | 31 | .194 | .230 | .298 | | | | |
| .625 | 0 | .085 | .120 | .190 | 10 | .540 | .505 | .435 |
| .640 | 01 | .100 | .135 | .206 | | | | |
| .656 | 1 | .116 | .151 | .221 | | | | |
| .672 | 11 | .131 | .167 | .237 | | | | |
| .687 | 2 | .147 | .183 | .252 | | | | |
| .702 | 21 | .163 | .198 | .268 | | | | |
| .719 | 3 | .179 | .214 | .283 | | | | |
| .734 | 31 | .194 | .230 | .298 | | | | |
| .750 | 0 | .085 | .120 | .190 | 12 | .665 | .630 | .560 |
| .765 | 01 | .100 | .135 | .206 | | | | |
| .781 | 1 | .116 | .151 | .221 | | | | |
| .796 | 11 | .131 | .167 | .237 | | | | |
| .812 | 2 | .147 | .183 | .252 | | | | |
| .827 | 21 | .163 | .198 | .268 | | | | |
| .844 | 3 | .179 | .214 | .283 | | | | |
| .859 | 31 | .194 | .230 | .298 | | | | |
| .875 | 0 | .085 | .120 | .190 | 14 | .790 | .755 | .685 |
| .890 | 01 | .100 | .135 | .206 | | | | |
| .906 | 1 | .116 | .151 | .221 | | | | |
| .921 | 11 | .131 | .167 | .237 | | | | |
| .937 | 2 | .147 | .183 | .252 | | | | |
| .952 | 21 | .163 | .198 | .268 | | | | |
| .969 | 3 | .179 | .214 | .283 | | | | |
| .984 | 31 | .194 | .230 | .298 | | | | |

 WITTEN COMPANY
 918-272-9567

APPROVAL DATE: 11/10/2020

GAGE CODE: OJHK5

W101


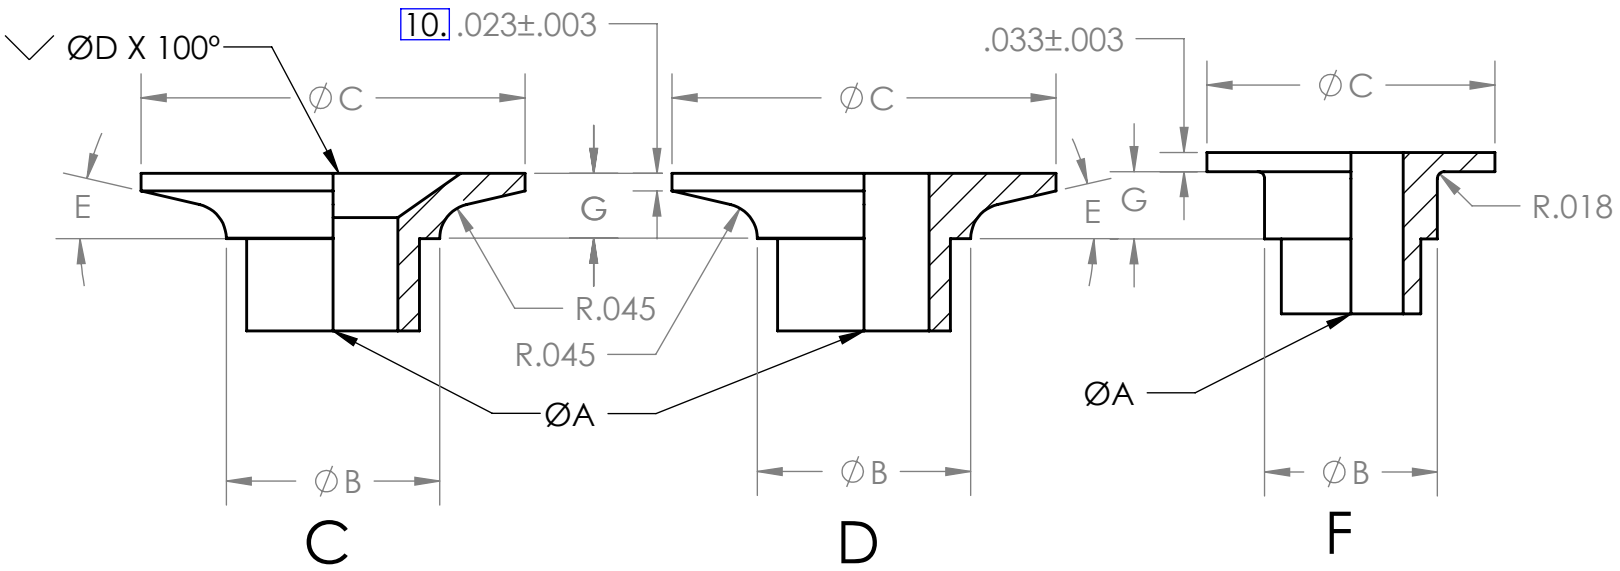
INSERT: GROMMET TYPE, THROUGH-RIVET

TABLE III (CONT.)


| PANEL THICKNESS MINIMUM | PLUG | | | | LENGTH CODE | SLEEVE | | |
|-------------------------|-------------|-----------|-------|-------|-------------|-----------|-------|-------|
| | LENGTH CODE | G | | | | H | | |
| | | SIZE CODE | | | | SIZE CODE | | |
| | | 12,15,18 | 25,28 | 31,37 | | 12,15,18 | 25,28 | 31,37 |
| 1.000 | 0 | .085 | .120 | .190 | 16 | .915 | .880 | .810 |
| 1.015 | 01 | .100 | .135 | .206 | | | | |
| 1.031 | 1 | .116 | .151 | .221 | | | | |
| 1.046 | 11 | .131 | .167 | .237 | | | | |
| 1.062 | 2 | .147 | .183 | .252 | | | | |
| 1.077 | 21 | .162 | .198 | .268 | | | | |
| 1.094 | 3 | .179 | .214 | .283 | | | | |
| 1.109 | 31 | .194 | .230 | .298 | | | | |
| 1.125 | 0 | .085 | .120 | .190 | 18 | 1.040 | 1.005 | .935 |
| 1.140 | 01 | .100 | .135 | .206 | | | | |
| 1.156 | 1 | .116 | .151 | .221 | | | | |
| 1.171 | 11 | .131 | .167 | .237 | | | | |
| 1.187 | 2 | .147 | .183 | .252 | | | | |
| 1.202 | 21 | .162 | .198 | .268 | | | | |
| 1.219 | 3 | .179 | .214 | .283 | | | | |
| 1.234 | 31 | .194 | .230 | .298 | | | | |
| 1.250 | 0 | .085 | .120 | .190 | 20 | 1.165 | 1.130 | 1.060 |
| 1.265 | 01 | .100 | .135 | .206 | | | | |
| 1.281 | 1 | .116 | .151 | .221 | | | | |
| 1.296 | 11 | .131 | .167 | .237 | | | | |
| 1.312 | 2 | .147 | .183 | .252 | | | | |
| 1.327 | 21 | .162 | .198 | .268 | | | | |
| 1.343 | 3 | .179 | .214 | .283 | | | | |
| 1.359 | 31 | .194 | .230 | .298 | | | | |

W102

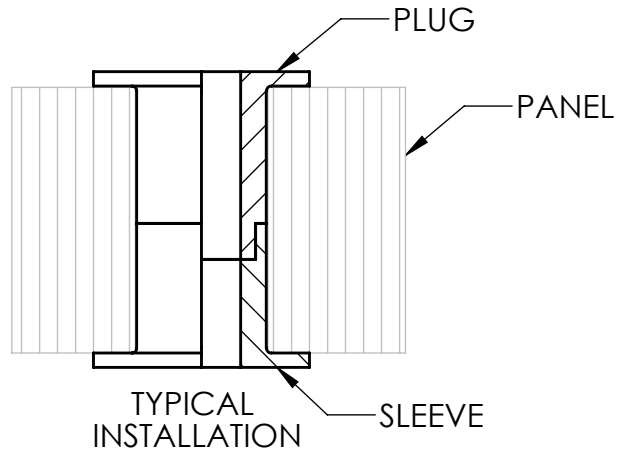INSERT: GROMMET TYPE, THROUGH-BOLT



PLUG HEAD STYLES

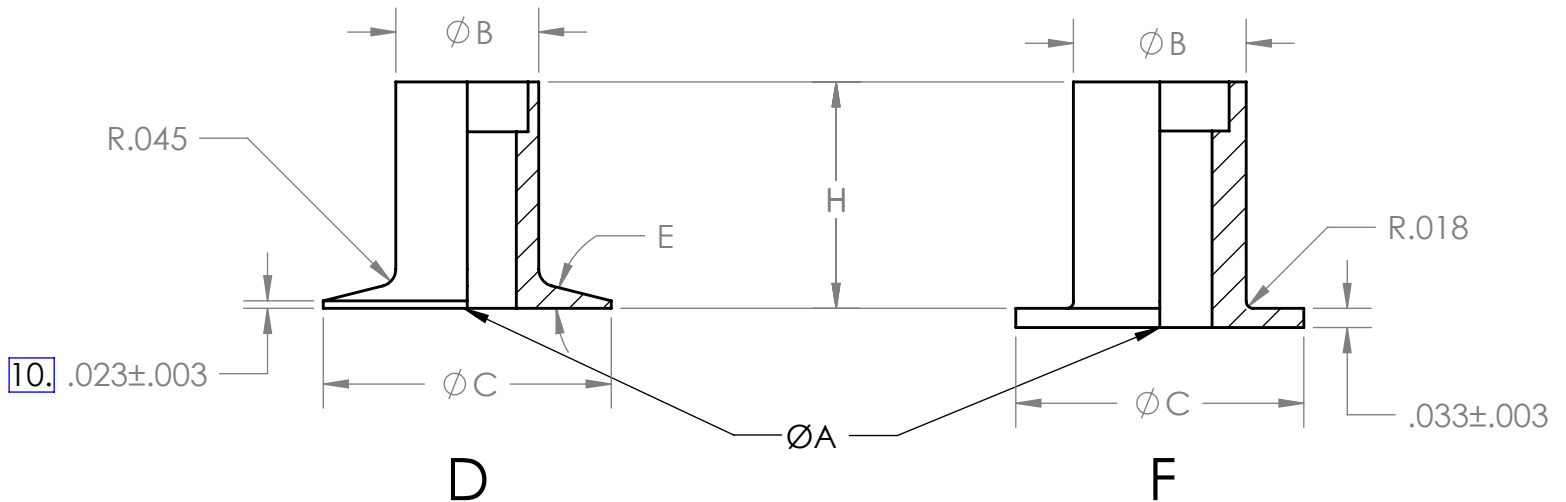

SLEEVE HEAD STYLES

WITTEN COMPANY
918-272-9567

APPROVAL DATE: REV:A 10/27/2020


GAGE CODE: 0JHK5

W102

INSERT: GROMMET TYPE, THROUGH-BOLT

PART NUMBER CODING:

WP102F8 - 11
WS102D8A08

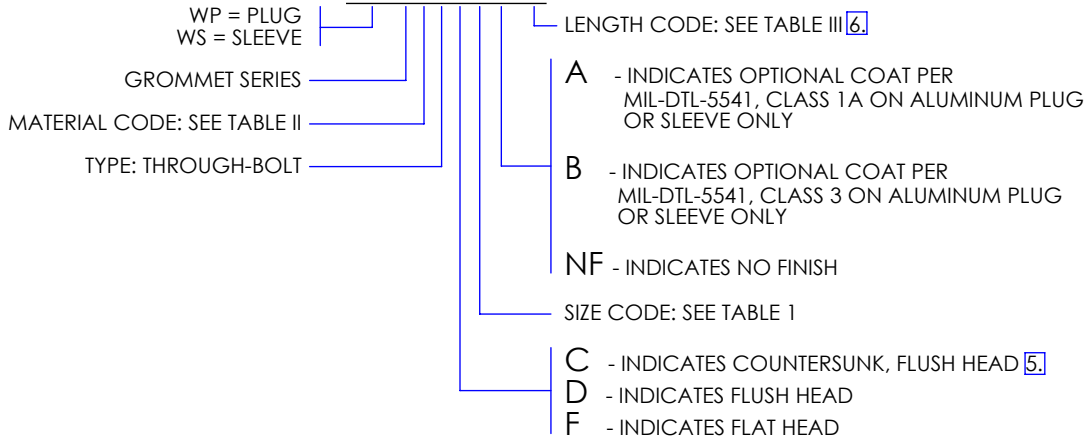
TABLE I

| SIZE CODE | ØA ±.003 | ØB ±.003 | ØC | ØD | E | INSTALLATION HOLE Ø |
|-----------|-------------|-------------|-------|------|-----|---------------------|
| 4 | .116 | .216 | .375 | .220 | 13° | .228 |
| 6 | .144 | .278 | .500 | .274 | 13° | .290 |
| 8 | .169 | .278 | .500 | .332 | 13° | .290 |
| 10 | .194 | .309 | .625 | .382 | 13° | .323 |
| 25 | .257 | .372 | .750 | .505 | 14° | .390 |
| 31 | .318 | .466 | .875 | .632 | 14° | .484 |
| 37 | .381 | .622 | 1.000 | .761 | 14° | .640 |

TABLE II

| MATL CODE | MATERIAL | FINISH |
|-----------|--|--|
| 0 | AL ALLOY, GRADE 2024, TEMPER T4 OR T351 PER SAE-AMS-QQ-A-225/6 | ANODIZE PER MIL-A-8625 TYPE I, CLASS 1 |
| 6 | CORROSION RESISTANT STEEL, TYPE 303 CRES PER ASTM A 582 | PASSIVATE PER ASTM-A967 |
| 9 | CARBON STEEL PER ASTM A 108 | CAD PLATE PER SAE-AMS-QQ-P-416, TYPE II, CLASS 2 |

NOTES:

1. DIMENSIONING AND TOLERANCING PRACTICES PER ASME Y14.5M-2018.
2. DIMENSIONAL LIMITS APPLY AFTER PLATING.
3. DEBURR AND BREAK ALL SHARP EDGES .005 - .015.
4. SURFACE TEXTURE: 125 MICROINCHES PER ASME B46.1-2019.
- ⁵ 'C' HEAD STYLE IS AVAILABLE IN PLUG CONFIGURATION ONLY.
- ⁶ REFER TO TABLE III TO SELECT PLUG/SLEEVE COMBINATION FOR A GIVEN PANEL THICKNESS.
7. THE W102 GROMMETS ARE SELF-RETAINED THROUGH A TELESCOPE FIT.
- ⁸ A SINGLE THROUGH HOLE DIAMETER IS USED FOR 03 SLEEVE LENGTH CODE.
- ⁹ A SINGLE THROUGH HOLE DIAMETER IS USED FOR 04 SLEEVE LENGTH CODE IN 26 AND 28 SIZE CODES.
- ¹⁰ PARTS SPECIFIED WITH A 31 OR 37 SIZE CODE HAVE A FLANGE THICKNESS OF .033±.003.
11. CONSULT THE WITTEN COMPANY ENGINEERING DEPARTMENT FOR OTHER FINISHES, MATERIALS, OR SIZES.

WITTEN COMPANY
918-272-9567

APPROVAL DATE: REV:A 10/27/2020

GAGE CODE: 0JHK5

W102

INSERT: GROMMET TYPE, THROUGH-BOLT

TABLE III

| PANEL THICKNESS MINIMUM | LENGTH CODE | PLUG | | | LENGTH CODE | SLEEVE | | |
|-------------------------|-------------|---------------|------|-------|-------------|---------------|------|-------|
| | | G+.000/- .010 | | | | H+.000/- .010 | | |
| | | SIZE CODE | | | | SIZE CODE | | |
| | | 4,6,8,10 | 25 | 31,37 | | 4,6,8,10 | 25 | 31,37 |
| .188 | X | .085 | .120 | NA | 03 [8.] | .103 | .067 | NA |
| .250 | 0 | .085 | .120 | NA | 04 [9.] | .165 | .130 | NA |
| .266 | 01 | .101 | .136 | | | | | |
| .281 | 1 | .116 | .151 | | | | | |
| .297 | 11 | .132 | .167 | | | | | |
| .312 | 2 | .147 | .182 | | | | | |
| .328 | 21 | .163 | .198 | | | | | |
| .344 | 3 | .179 | .214 | | | | | |
| .359 | 31 | .194 | .229 | | | | | |
| .375 | 0 | .085 | .120 | .190 | 06 | .290 | .255 | .185 |
| .391 | 01 | .101 | .136 | .206 | | | | |
| .406 | 1 | .116 | .151 | .221 | | | | |
| .422 | 11 | .132 | .167 | .237 | | | | |
| .438 | 2 | .147 | .182 | .252 | | | | |
| .453 | 21 | .163 | .198 | .268 | | | | |
| .469 | 3 | .179 | .214 | .284 | | | | |
| .484 | 31 | .194 | .229 | .299 | | | | |
| .500 | 0 | .085 | .120 | .190 | 08 | .415 | .380 | .310 |
| .516 | 01 | .101 | .136 | .206 | | | | |
| .531 | 1 | .116 | .151 | .221 | | | | |
| .547 | 11 | .132 | .167 | .237 | | | | |
| .562 | 2 | .147 | .182 | .252 | | | | |
| .578 | 21 | .163 | .198 | .268 | | | | |
| .594 | 3 | .179 | .214 | .284 | | | | |
| .609 | 31 | .194 | .229 | .299 | | | | |
| .625 | 0 | .085 | .120 | .190 | 10 | .540 | .505 | .435 |
| .641 | 01 | .101 | .136 | .206 | | | | |
| .656 | 1 | .116 | .151 | .221 | | | | |
| .672 | 11 | .132 | .167 | .237 | | | | |
| .688 | 2 | .147 | .182 | .252 | | | | |
| .703 | 21 | .163 | .198 | .268 | | | | |
| .719 | 3 | .179 | .214 | .284 | | | | |
| .734 | 31 | .194 | .229 | .299 | | | | |
| .750 | 0 | .085 | .120 | .190 | 12 | .685 | .630 | .560 |
| .766 | 01 | .101 | .136 | .206 | | | | |
| .781 | 1 | .116 | .151 | .221 | | | | |
| .797 | 11 | .132 | .167 | .237 | | | | |
| .812 | 2 | .147 | .182 | .252 | | | | |
| .828 | 21 | .163 | .198 | .268 | | | | |
| .844 | 3 | .179 | .214 | .284 | | | | |
| .859 | 31 | .194 | .229 | .299 | | | | |
| .875 | 0 | .085 | .120 | .190 | 14 | .790 | .755 | .685 |
| .891 | 01 | .101 | .136 | .206 | | | | |
| .906 | 1 | .116 | .151 | .221 | | | | |
| .922 | 11 | .132 | .167 | .237 | | | | |
| .938 | 2 | .147 | .182 | .252 | | | | |
| .953 | 21 | .163 | .198 | .268 | | | | |
| .969 | 3 | .179 | .214 | .284 | | | | |
| .984 | 31 | .194 | .229 | .299 | | | | |




W102

INSERT: GROMMET TYPE, THROUGH-BOLT

TABLE III (CONT.)

| PANEL THICKNESS MINIMUM | LENGTH CODE | PLUG | | | LENGTH CODE | SLEEVE | | |
|-------------------------|-------------|---------------|------|-------|-------------|---------------|-------|-------|
| | | G+.000/- .010 | | | | H+.000/- .010 | | |
| | | SIZE CODE | | | | SIZE CODE | | |
| | | 4,6,8,10 | 25 | 31,37 | | 4,6,8,10 | 25 | 31,37 |
| 1.000 | 0 | .085 | .120 | .190 | 16 | .915 | .880 | .810 |
| 1.016 | 01 | .101 | .136 | .206 | | | | |
| 1.031 | 1 | .116 | .151 | .221 | | | | |
| 1.047 | 11 | .132 | .167 | .237 | | | | |
| 1.062 | 2 | .147 | .182 | .252 | | | | |
| 1.078 | 21 | .163 | .198 | .268 | | | | |
| 1.094 | 3 | .179 | .214 | .284 | | | | |
| 1.109 | 31 | .194 | .229 | .299 | | | | |
| 1.125 | 0 | .085 | .120 | .190 | 18 | 1.040 | 1.005 | .935 |
| 1.141 | 01 | .101 | .136 | .206 | | | | |
| 1.156 | 1 | .116 | .151 | .221 | | | | |
| 1.172 | 11 | .132 | .167 | .237 | | | | |
| 1.188 | 2 | .147 | .182 | .252 | | | | |
| 1.203 | 21 | .163 | .198 | .268 | | | | |
| 1.219 | 3 | .179 | .214 | .284 | | | | |
| 1.234 | 31 | .194 | .229 | .299 | | | | |
| 1.250 | 0 | .085 | .120 | .190 | 20 | 1.165 | 1.130 | 1.060 |
| 1.266 | 01 | .101 | .136 | .206 | | | | |
| 1.281 | 1 | .116 | .151 | .221 | | | | |
| 1.297 | 11 | .132 | .167 | .237 | | | | |
| 1.312 | 2 | .147 | .182 | .252 | | | | |
| 1.328 | 21 | .163 | .198 | .268 | | | | |
| 1.344 | 3 | .179 | .214 | .284 | | | | |
| 1.359 | 31 | .194 | .229 | .299 | | | | |
| 1.375 | 0 | .085 | .120 | .190 | 22 | 1.290 | 1.255 | 1.185 |
| 1.391 | 01 | .101 | .136 | .206 | | | | |
| 1.406 | 1 | .116 | .151 | .221 | | | | |
| 1.422 | 11 | .132 | .167 | .237 | | | | |
| 1.438 | 2 | .147 | .182 | .252 | | | | |
| 1.453 | 21 | .163 | .198 | .268 | | | | |
| 1.469 | 3 | .179 | .214 | .284 | | | | |
| 1.484 | 31 | .194 | .229 | .299 | | | | |
| 1.500 | 0 | .085 | .120 | .190 | 24 | 1.415 | 1.380 | 1.310 |
| 1.516 | 01 | .101 | .136 | .206 | | | | |
| 1.531 | 1 | .116 | .151 | .221 | | | | |
| 1.547 | 11 | .132 | .167 | .237 | | | | |
| 1.562 | 2 | .147 | .182 | .252 | | | | |
| 1.578 | 21 | .163 | .198 | .268 | | | | |
| 1.594 | 3 | .179 | .214 | .284 | | | | |
| 1.609 | 31 | .194 | .229 | .299 | | | | |
| 1.625 | 0 | .085 | .120 | .190 | 26 | 1.540 | 1.505 | 1.435 |
| 1.641 | 01 | .101 | .136 | .206 | | | | |
| 1.656 | 1 | .116 | .151 | .221 | | | | |
| 1.672 | 11 | .132 | .167 | .237 | | | | |
| 1.688 | 2 | .147 | .182 | .252 | | | | |
| 1.703 | 21 | .163 | .198 | .268 | | | | |
| 1.719 | 3 | .179 | .214 | .284 | | | | |
| 1.734 | 31 | .194 | .229 | .299 | | | | |

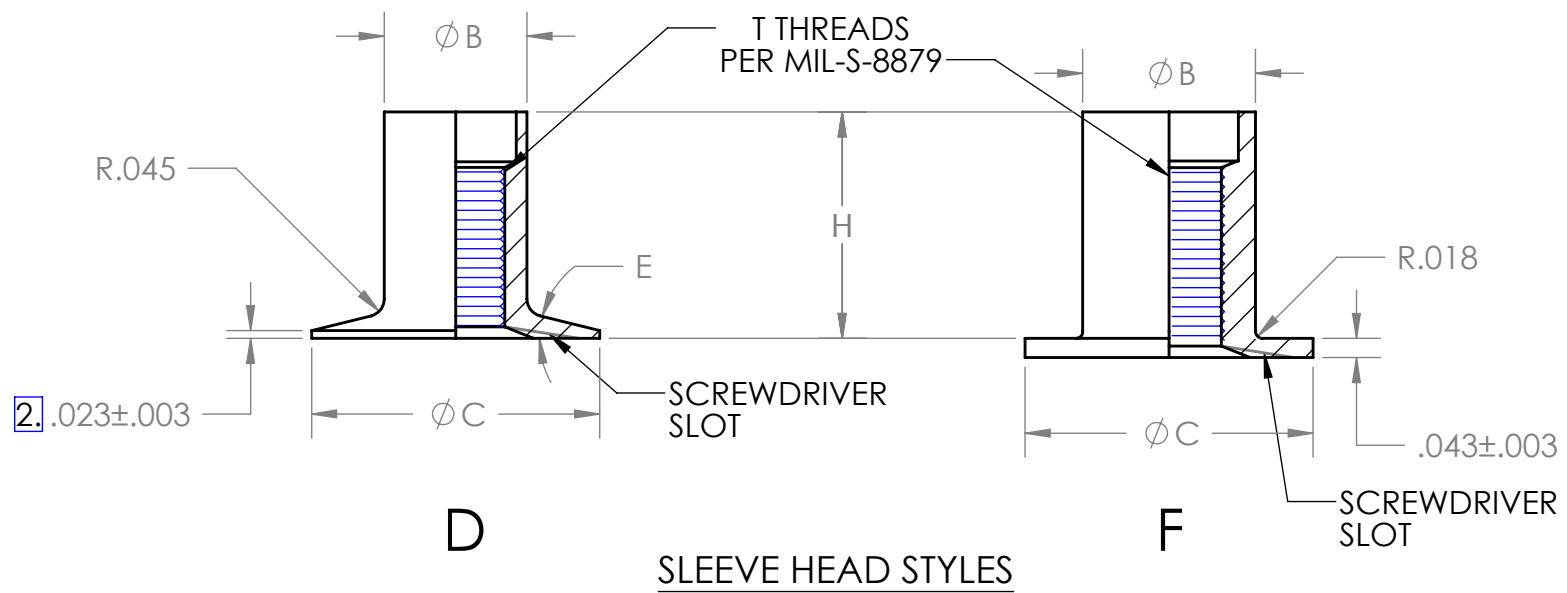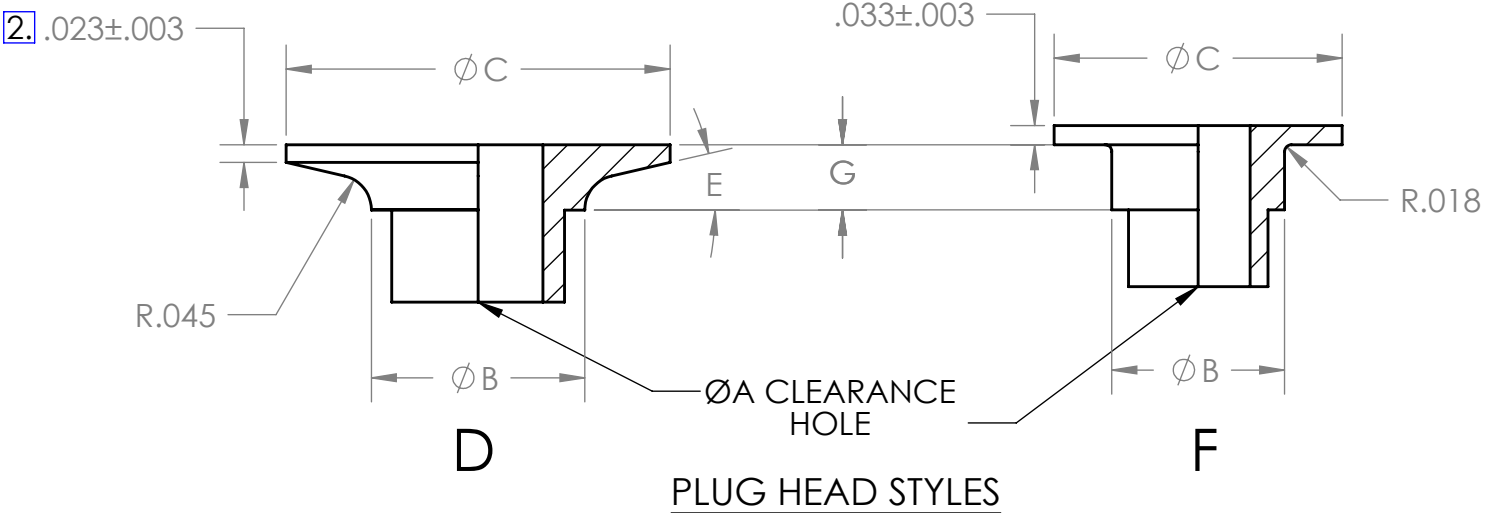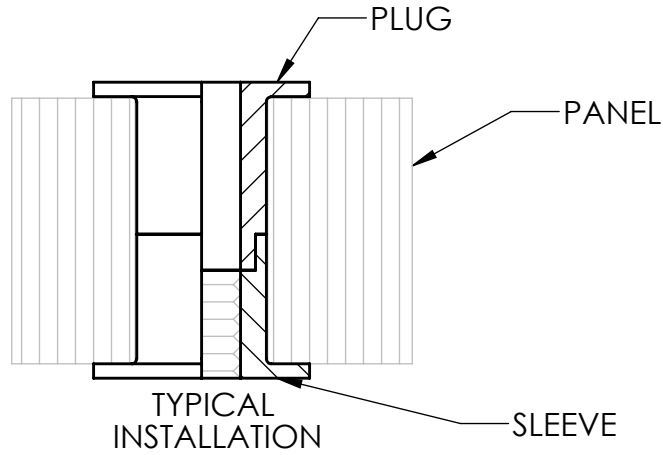
W103
INSERT: GROMMET TYPE, THREADED



W103

INSERT: GROMMET TYPE, THREADED

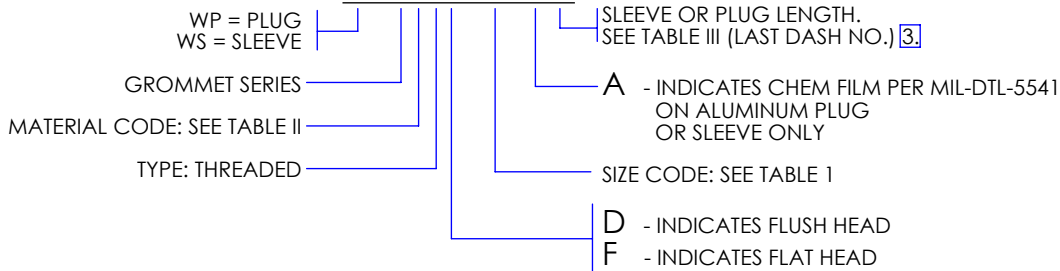PART NUMBER CODING:

 WP193F10-0
 WS193F1032-08

TABLE I

| BOLT SIZE | T THREAD CLASS 3B | ØA ±.003 | ØB ±.003 | ØC | E |
|-----------|----------------------|-------------|-------------|------|-----|
| 440 | .112-40UNJC | .116 | .216 | .375 | 13° |
| 632 | .1380-32UNJC | .142 | .278 | .500 | 13° |
| 832 | .1640-32UNJC | .168 | .278 | .500 | 13° |
| 1032 | .1900-32UNJF | .194 | .309 | .625 | 13° |
| 428 | .2500-28UNJF | .256 | .372 | .750 | 14° |
| 524 | .3125-24UNJF | .318 | .466 | .875 | 14° |

TABLE II

| MATL CODE | MATERIAL | FINISH |
|-----------|---|--|
| 0 | AL ALLOY, GRADE 2024, TEMPER T4 OR T351 PER SAE-AMS-QQ-A-225/6 | ANODIZE PER MIL-A-8625 TYPE I |
| 6 | CORROSION RESISTANT STEEL, TYPE 303 CRES PER ASTM A 582 | PASSIVATE PER ASTM-A967 |
| 9 | CARBON STEEL PER ASTM A 108 | CAD PLATE PER SAE-AMS-QQ-P-416, TYPE II, CLASS 2 |

NOTES:

1. ANY COMBINATION OF SLEEVE AND PLUG WITHIN BOLT SIZE MAY BE USED.
2. .033±.003 ON 524 SIZE.
3. REFER TO TABLE III TO SELECT PLUG/SLEEVE COMBINATION FOR A GIVEN PANEL THICKNESS.
4. THE W103 SERIES GROMMETS ARE SELF-RETAINED THROUGH A TELESCOPIC PRESS FIT.
5. CONSULT THE WITTEN COMPANY ENGINEERING DEPARTMENT FOR OTHER FINISHES, MATERIALS, OR SIZES.

 WITTEN COMPANY
 918-272-9567

 APPROVAL DATE:
 11/10/2020

GAGE CODE: 0JHK5

W103

INSERT: GROMMET TYPE, THREADED

TABLE III



| PANEL THICKNESS MINIMUM | LENGTH CODE | PLUG | | | LENGTH CODE | SLEEVE | | | | | | |
|-------------------------|-------------|-------------|------|------|-------------|---------------------|-------|-------|----|-------|-------|------|
| | | G | | | | H | | | | | | |
| | | SIZE CODE | | | | SIZE CODE | | | | | | |
| | | 4, 6, 8, 10 | 25 | 31 | | 440, 632, 832, 1032 | 428 | 524 | | | | |
| .500 | 0 | .085 | .120 | .120 | 08 | .415 | .380 | NA | | | | |
| .515 | 01 | .100 | .135 | | | | | | | | | |
| .531 | 1 | .116 | .151 | | | | | | | | | |
| .546 | 11 | .131 | .167 | NA | | | | | | | | |
| .562 | 2 | .147 | .183 | | | | | | | | | |
| .577 | 21 | .162 | .198 | | | | | | | | | |
| .594 | 3 | .179 | .214 | | | | | | | | | |
| .609 | 31 | .194 | .230 | | | | | | | | | |
| .625 | 0 | .085 | .120 | .190 | | | | | 10 | .540 | .505 | .435 |
| .640 | 01 | .100 | .135 | .206 | | | | | | | | |
| .656 | 1 | .116 | .151 | .221 | | | | | | | | |
| .672 | 11 | .131 | .167 | .237 | | | | | | | | |
| .687 | 2 | .147 | .183 | .252 | | | | | | | | |
| .702 | 21 | .162 | .198 | .268 | | | | | | | | |
| .719 | 3 | .179 | .214 | .283 | | | | | | | | |
| .734 | 31 | .194 | .230 | .298 | | | | | | | | |
| .750 | 0 | .085 | .120 | .190 | 12 | .665 | .630 | .560 | | | | |
| .765 | 01 | .100 | .135 | .206 | | | | | | | | |
| .781 | 1 | .116 | .151 | .221 | | | | | | | | |
| .796 | 11 | .131 | .167 | .237 | | | | | | | | |
| .812 | 2 | .147 | .183 | .252 | | | | | | | | |
| .827 | 21 | .162 | .198 | .268 | | | | | | | | |
| .844 | 3 | .179 | .214 | .283 | | | | | | | | |
| .859 | 31 | .194 | .230 | .298 | | | | | | | | |
| .875 | 0 | .085 | .120 | .190 | | | | | 14 | .790 | .755 | .685 |
| .890 | 01 | .100 | .135 | .206 | | | | | | | | |
| .906 | 1 | .116 | .151 | .221 | | | | | | | | |
| .921 | 11 | .131 | .167 | .237 | | | | | | | | |
| .937 | 2 | .147 | .183 | .252 | | | | | | | | |
| .952 | 21 | .162 | .198 | .268 | | | | | | | | |
| .969 | 3 | .179 | .214 | .283 | | | | | | | | |
| .984 | 31 | .194 | .230 | .298 | | | | | | | | |
| 1.000 | 0 | .085 | .120 | .190 | 16 | .915 | .880 | .810 | | | | |
| 1.015 | 01 | .100 | .135 | .206 | | | | | | | | |
| 1.031 | 1 | .116 | .151 | .221 | | | | | | | | |
| 1.046 | 11 | .131 | .167 | .237 | | | | | | | | |
| 1.062 | 2 | .147 | .183 | .252 | | | | | | | | |
| 1.077 | 21 | .162 | .198 | .268 | | | | | | | | |
| 1.094 | 3 | .179 | .214 | .283 | | | | | | | | |
| 1.109 | 31 | .194 | .230 | .298 | | | | | | | | |
| 1.125 | 0 | .085 | .120 | .190 | | | | | 18 | 1.040 | 1.005 | .935 |
| 1.140 | 01 | .100 | .135 | .206 | | | | | | | | |
| 1.156 | 1 | .116 | .151 | .221 | | | | | | | | |
| 1.171 | 11 | .131 | .167 | .237 | | | | | | | | |
| 1.187 | 2 | .147 | .183 | .252 | | | | | | | | |
| 1.202 | 21 | .162 | .198 | .268 | | | | | | | | |
| 1.219 | 3 | .179 | .214 | .283 | | | | | | | | |
| 1.234 | 31 | .194 | .230 | .298 | | | | | | | | |
| 1.250 | 0 | .085 | .120 | .190 | 20 | 1.165 | 1.130 | 1.060 | | | | |
| 1.265 | 01 | .100 | .135 | .206 | | | | | | | | |
| 1.281 | 1 | .116 | .151 | .221 | | | | | | | | |
| 1.296 | 11 | .131 | .167 | .237 | | | | | | | | |
| 1.312 | 2 | .147 | .183 | .252 | | | | | | | | |
| 1.327 | 21 | .162 | .198 | .268 | | | | | | | | |
| 1.343 | 3 | .179 | .214 | .283 | | | | | | | | |
| 1.359 | 31 | .194 | .230 | .298 | | | | | | | | |

 WITTEN COMPANY
 918-272-9567


 APPROVAL DATE:
 11/10/2020

GAGE CODE: OJHK5

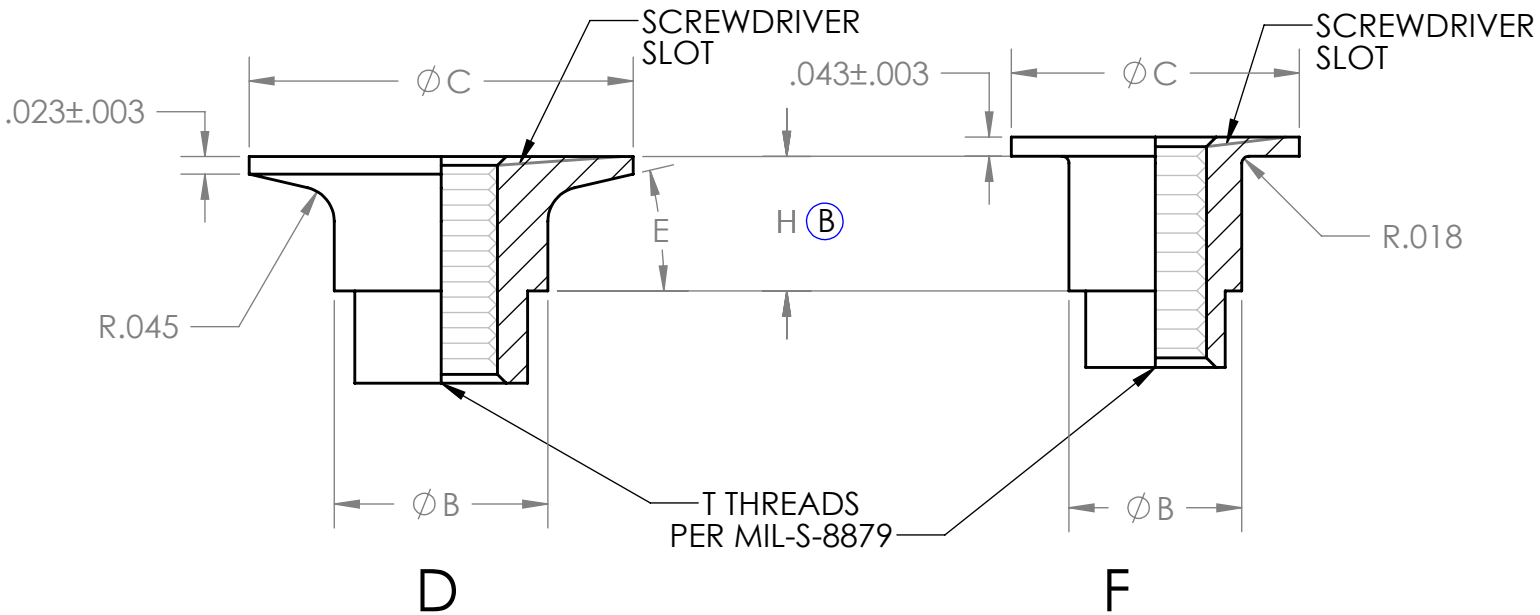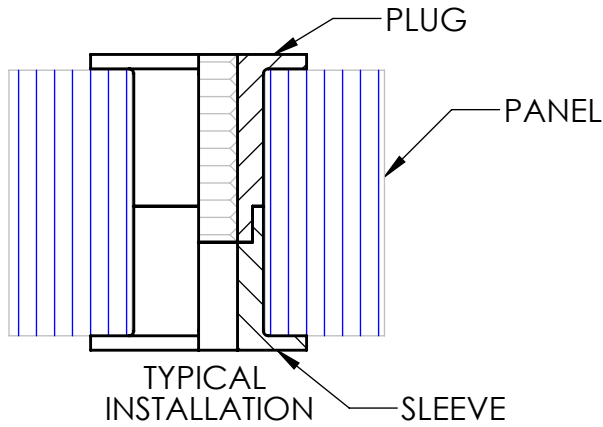W103 THIN SERIES
INSERT: GROMMET TYPE, THREADED, THIN PANEL FASTENER



PLUG HEAD STYLES

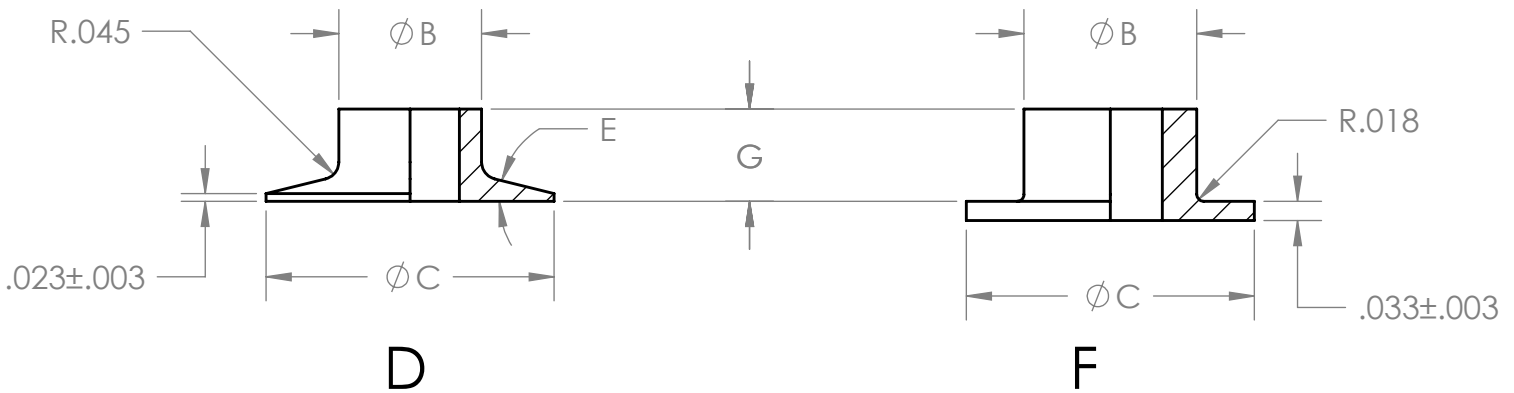

SLEEVE HEAD STYLES


W103 THIN SERIES

INSERT: GROMMET TYPE, THREADED, THIN PANEL FASTENER

PART NUMBER CODING:

WS193F10-0

WP193F1032-06

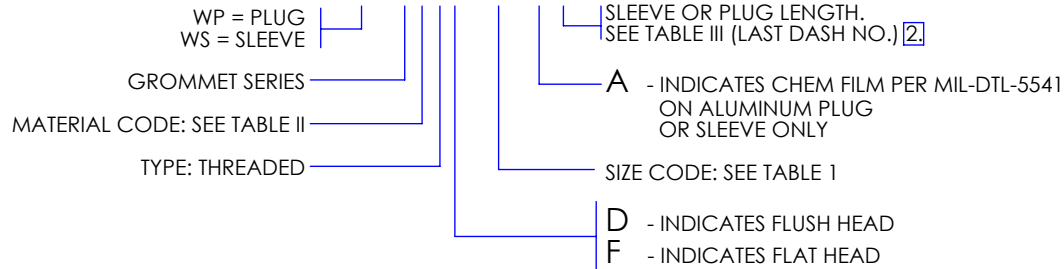
TABLE I

| BOLT SIZE | T THREAD CLASS 3B | ØB ±.003 | ØC | E |
|-----------|----------------------|-------------|------|-----|
| 440 | .1120-40UNJC | .216 | .375 | 13° |
| 632 | .1380-32UNJC | .278 | .500 | 13° |
| 832 | .1640-32UNJC | .278 | .500 | 13° |
| 1032 | .1900-32UNJF | .309 | .625 | 13° |
| 428 | .2500-28UNJF | .372 | .750 | 14° |
| 524 | .3125-24UNJF | .466 | .875 | 14° |

TABLE II

| MATL CODE | MATERIAL | FINISH |
|-----------|--|--|
| 0 | AL ALLOY, GRADE 2024, TEMPER T4 OR T351 PER SAE-AMS-QQ-A-225/6 | ANODIZE PER MIL-A-8625 TYPE I |
| 6 | CORROSION RESISTANT STEEL, TYPE 303 CRES PER ASTM A 582 | PASSIVATE PER ASTM-A967 |
| 9 | CARBON STEEL PER ASTM A 108 | CAD PLATE PER SAE-AMS-QQ-P-416, TYPE II, CLASS 2 |

TABLE III

| PANEL THICKNESS MINIMUM | LENGTH CODE | SLEEVE | | LENGTH CODE | PLUG | |
|-------------------------|-------------|-----------------|------|-------------|--------------------------|------|
| | | G | | | H | |
| | | SIZE CODE | | | SIZE CODE | |
| | | 4, 6, 8, 10, 25 | 31 | | 440, 632, 832, 1032, 428 | 524 |
| .245 | 0 | .094 | NA | 04 | .151 | NA |
| .276 | 1 | .125 | | | | |
| .307 | 2 | .156 | | | | |
| .338 | 3 | .187 | | | | |
| .375 | 0 | .094 | .094 | 06 | .281 | .281 |
| .406 | 1 | .125 | .125 | | | |
| .437 | 2 | .156 | .156 | | | |
| .468 | 3 | .187 | .187 | | | |
| .495 | 0 | NA | .094 | 08 | NA | .401 |
| .526 | 1 | | .125 | | | |
| .557 | 2 | | .156 | | | |
| .588 | 3 | | .187 | | | |

NOTES:

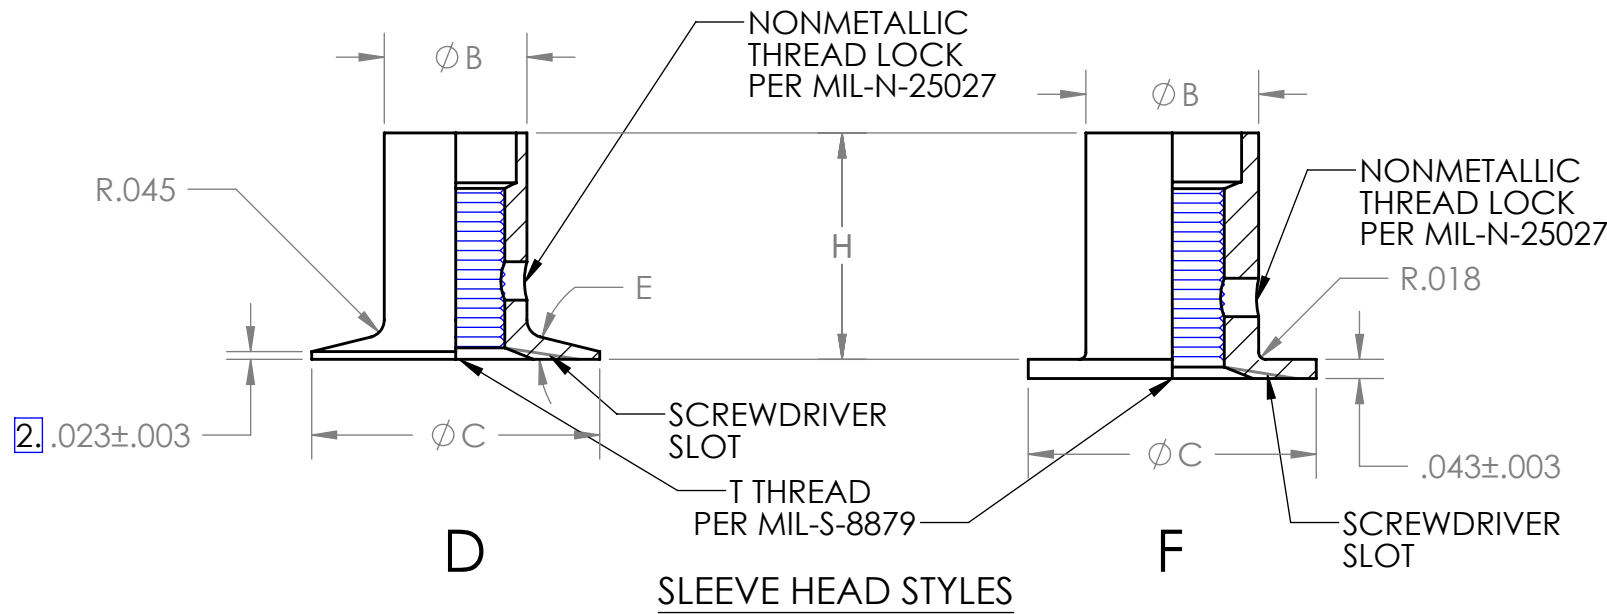
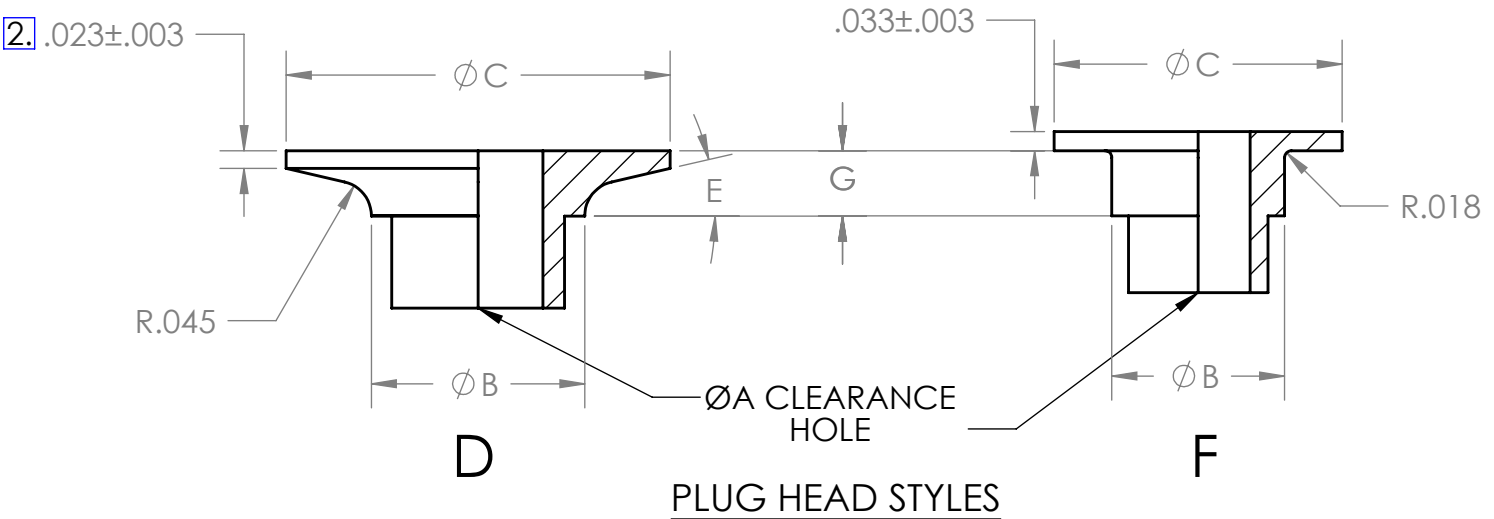
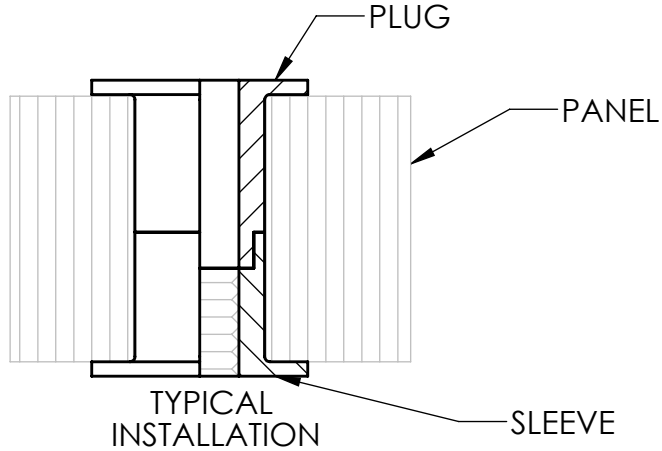
- ANY COMBINATION OF SLEEVE AND PLUG WITHIN BOLT SIZE MAY BE USED.
- REFER TO TABLE III TO SELECT PLUG/SLEEVE COMBINATION FOR A GIVEN PANEL THICKNESS.
- THE W103 THIN SERIES GROMMETS ARE SELF-RETAINED THROUGH A TELESCOPIC PRESS FIT.
- CONSULT THE WITTEN COMPANY ENGINEERING DEPARTMENT FOR OTHER FINISHES, MATERIALS, OR SIZES.

 WITTEN COMPANY
 918-272-9567

APPROVAL DATE: REV:A 7/1/2022

GAGE CODE: 0JHK5

W104
INSERT: GROMMET TYPE, THREADED NONMETALLIC THREAD LOCK




W104

INSERT: GROMMET TYPE, THREADED NONMETALLIC THREAD LOCK

PART NUMBER CODING:

WP164F10-1

WS164F1032-08

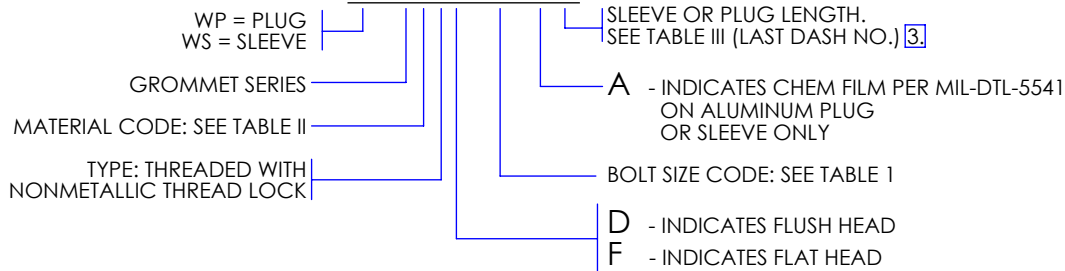
TABLE I

| BOLT SIZE | T THREAD CLASS 3B | ØA ±.003 | ØB ±.003 | ØC | E |
|-----------|----------------------|-------------|-------------|------|-----|
| 440 | .112-40UNJC | .116 | .216 | .375 | 13° |
| 632 | .1380-32UNJC | .142 | .309 | .500 | 13° |
| 832 | .1640-32UNJC | .168 | .309 | .500 | 13° |
| 1032 | .1900-32UNJF | .194 | .341 | .625 | 13° |
| 428 | .2500-28UNJF | .256 | .403 | .750 | 14° |
| 524 | .3125-24UNJF | .318 | .497 | .875 | 14° |

TABLE II

| MATL CODE | MATERIAL | FINISH |
|-----------|---|--|
| 0 | AL ALLOY, GRADE 2024, TEMPER T4 OR T351 PER SAE-AMS-QQ-A-225/6 | ANODIZE PER MIL-A-8625 TYPE I |
| 6 | CORROSION RESISTANT STEEL, TYPE 303 CRES PER ASTM A 582 | PASSIVATE PER ASTM-A967 |
| 9 | CARBON STEEL PER ASTM A 108 | CAD PLATE PER SAE-AMS-QQ-P-416, TYPE II, CLASS 2 |

NOTES:

1. ANY COMBINATION OF SLEEVE AND PLUG WITHIN BOLT SIZE MAY BE USED.
2. .033±.003 ON 524 SIZE.
3. REFER TO TABLE III TO SELECT PLUG/SLEEVE COMBINATION FOR A GIVEN PANEL THICKNESS.
4. THE W104 SERIES GROMMETS ARE SELF-RETAINED THROUGH A TELESCOPIC PRESS FIT.
5. CONSULT THE WITTEN COMPANY ENGINEERING DEPARTMENT FOR OTHER FINISHES, MATERIALS, OR SIZES.

 WITTEN COMPANY
918-272-9567

 APPROVAL DATE:
11/10/2020

GAGE CODE: 0JHK5

W104

INSERT: GROMMET TYPE, THREADED, NONMETALLIC THREAD LOCK

TABLE III



| PANEL THICKNESS MINIMUM | LENGTH CODE | PLUG | | LENGTH CODE | SLEEVE | |
|-------------------------|-------------|-----------------|------|-------------|--------------------------|-----|
| | | G | | | H | |
| | | SIZE CODE | | | SIZE CODE | |
| | | 4, 6, 8, 10, 25 | 31 | | 440, 632, 832, 1032, 428 | 524 |
| .500 | 0 | .085 | | | | |
| .515 | 01 | .100 | | | | |
| .531 | 1 | .116 | | | | |
| .546 | 11 | .131 | | | | |
| .562 | 2 | .147 | | | | |
| .577 | 21 | .162 | | | | |
| .594 | 3 | .179 | | | | |
| .609 | 31 | .194 | | | | |
| .625 | 0 | .085 | | | | |
| .640 | 01 | .100 | | | | |
| .656 | 1 | .116 | | | | |
| .672 | 11 | .131 | | | | |
| .687 | 2 | .147 | | | | |
| .702 | 21 | .162 | | | | |
| .719 | 3 | .179 | | | | |
| .734 | 31 | .194 | | | | |
| .750 | 0 | .085 | | | | |
| .765 | 01 | .100 | | | | |
| .781 | 1 | .116 | | | | |
| .796 | 11 | .131 | | | | |
| .812 | 2 | .147 | | | | |
| .827 | 21 | .162 | | | | |
| .844 | 3 | .179 | | | | |
| .859 | 31 | .194 | | | | |
| .875 | 0 | .085 | .248 | | | |
| .890 | 01 | .100 | .264 | | | |
| .906 | 1 | .116 | .279 | | | |
| .921 | 11 | .131 | .295 | | | |
| .937 | 2 | .147 | .310 | | | |
| .952 | 21 | .162 | .326 | | | |
| .969 | 3 | .179 | .341 | | | |
| .984 | 31 | .194 | .357 | | | |
| 1.000 | 0 | .085 | .248 | | | |
| 1.015 | 01 | .100 | .264 | | | |
| 1.031 | 1 | .116 | .279 | | | |
| 1.046 | 11 | .131 | .295 | | | |
| 1.062 | 2 | .147 | .310 | | | |
| 1.077 | 21 | .162 | .326 | | | |
| 1.094 | 3 | .179 | .341 | | | |
| 1.109 | 31 | .194 | .357 | | | |
| 1.125 | 0 | .085 | .248 | | | |
| 1.140 | 01 | .100 | .264 | | | |
| 1.156 | 1 | .116 | .279 | | | |
| 1.171 | 11 | .131 | .295 | | | |
| 1.187 | 2 | .147 | .310 | | | |
| 1.202 | 21 | .162 | .326 | | | |
| 1.219 | 3 | .179 | .341 | | | |
| 1.234 | 31 | .194 | .357 | | | |
| 1.250 | 0 | .085 | .248 | | | |
| 1.265 | 01 | .100 | .264 | | | |
| 1.281 | 1 | .116 | .279 | | | |
| 1.296 | 11 | .131 | .295 | | | |
| 1.312 | 2 | .147 | .310 | | | |
| 1.327 | 21 | .162 | .326 | | | |
| 1.343 | 3 | .179 | .341 | | | |
| 1.359 | 31 | .194 | .357 | | | |

 WITTEN COMPANY
 918-272-9567

 APPROVAL DATE:
 11/10/2020

GAGE CODE: 0JHK5

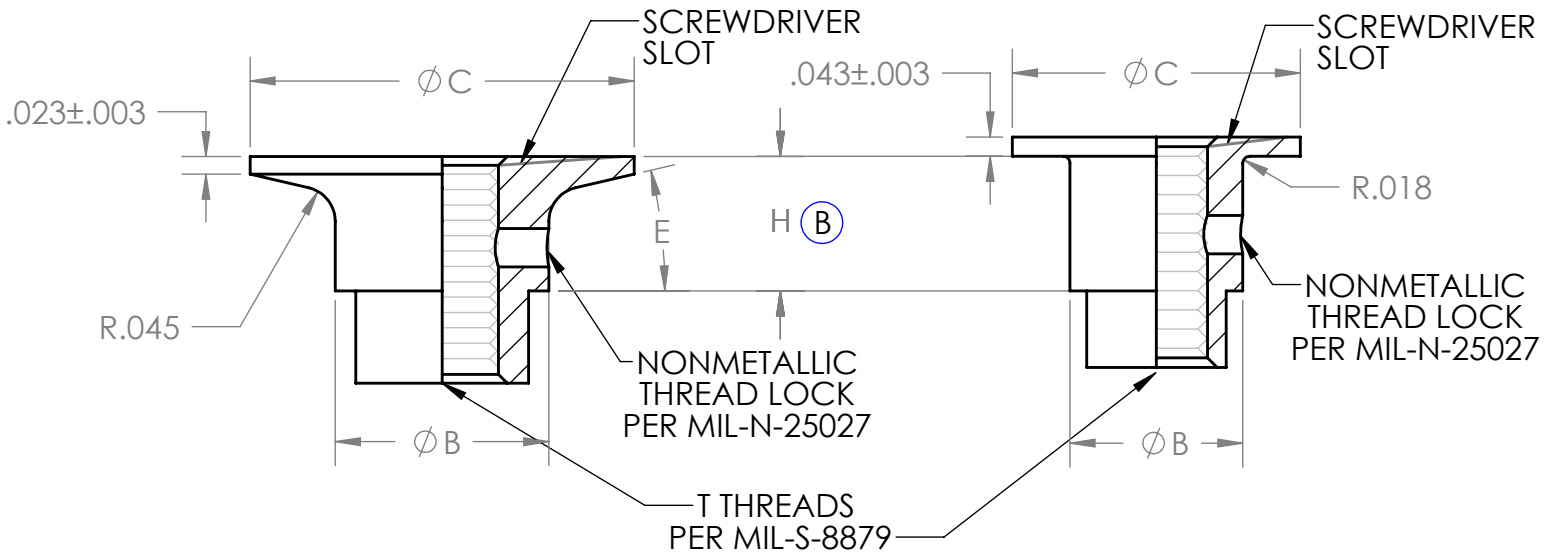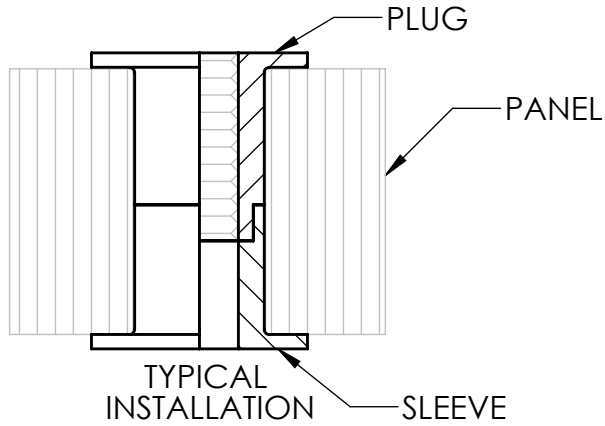
W104 THIN SERIES
INSERT: GROMMET TYPE, THREADED, NONMETALLIC
THREAD LOCK, THIN PANEL FASTENER



D

F

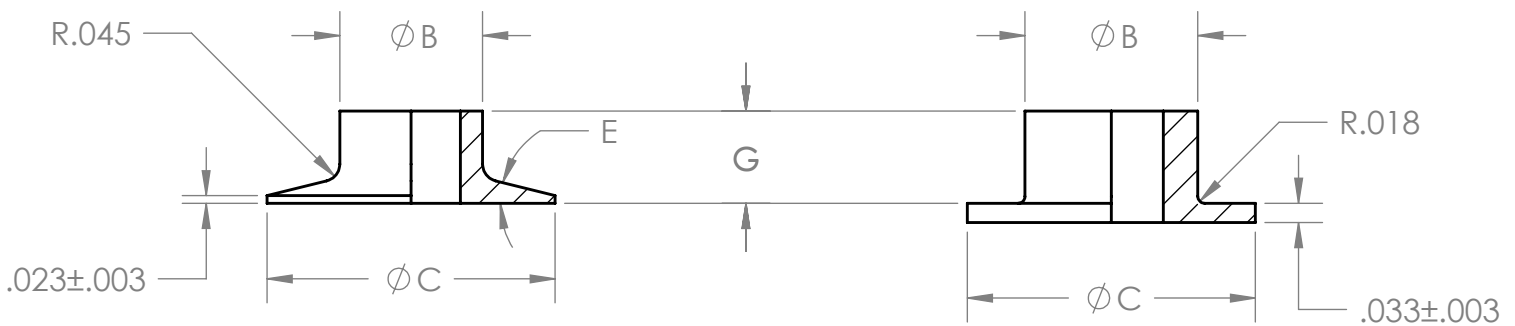PLUG HEAD STYLES



D

F

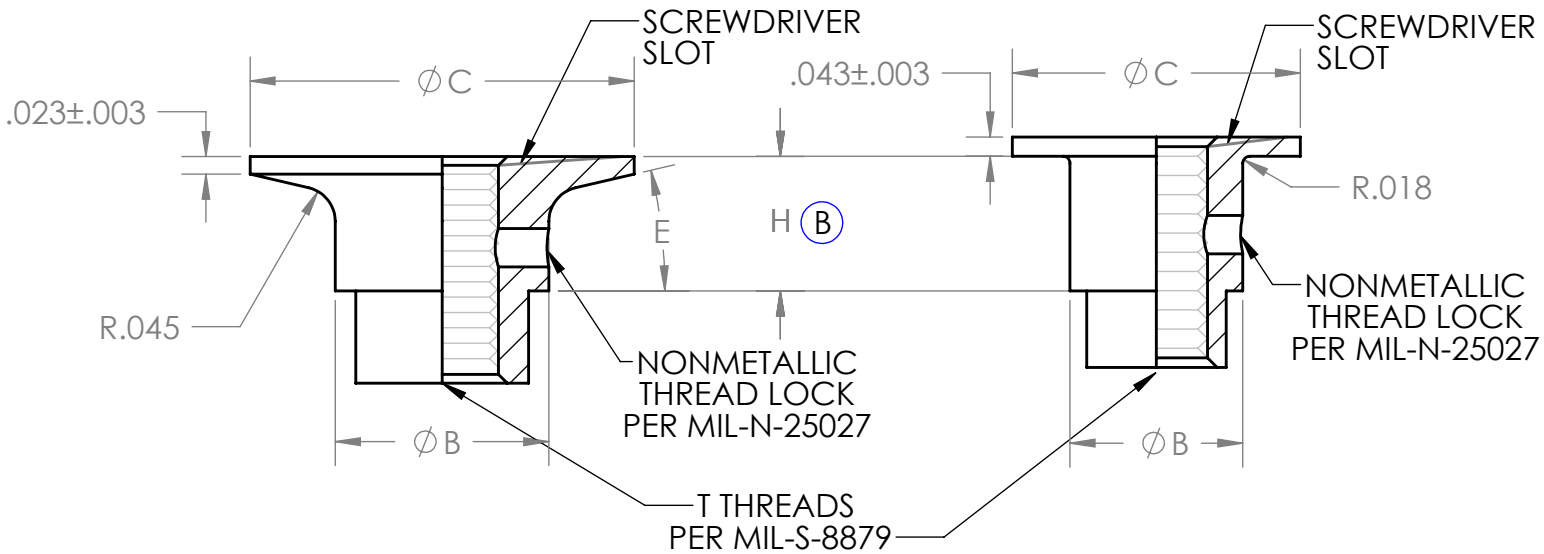
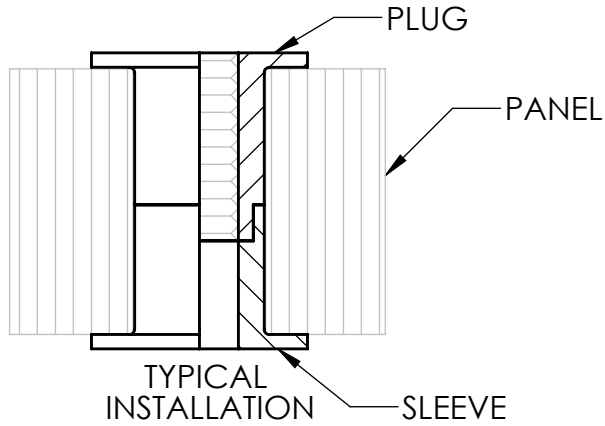
SLEEVE HEAD STYLES

WITTEN COMPANY
 918-272-9567

APPROVAL DATE: 11/10/2020

GAGE CODE: 0JHK5


W104 THIN SERIES
INSERT: GROMMET TYPE, THREADED, NONMETALLIC
THREAD LOCK, THIN PANEL FASTENER



D

F

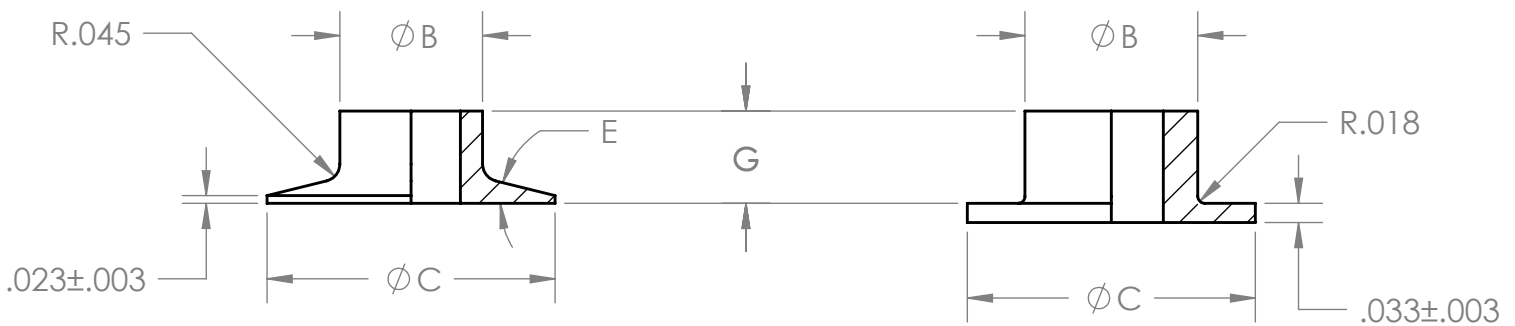PLUG HEAD STYLES



D

F

SLEEVE HEAD STYLES

WITTEN COMPANY
 918-272-9567

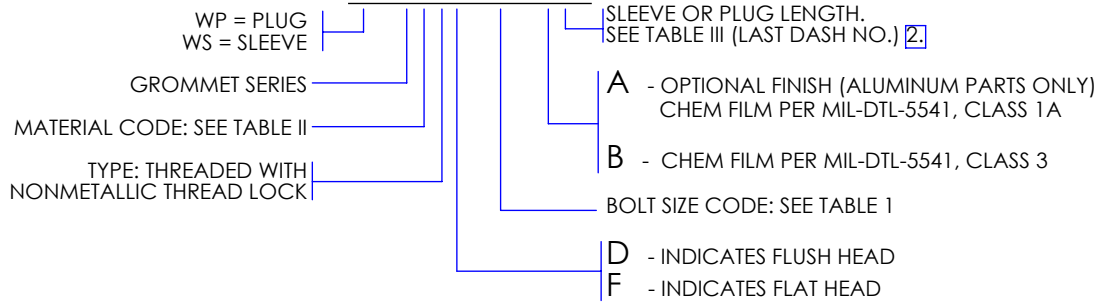
APPROVAL DATE: REV:A 7/2/2021

GAGE CODE: 0JHK5

W104 THIN SERIES

INSERT: GROMMET TYPE, THREADED, NONMETALLIC THREAD LOCK, THIN PANEL FASTENER

PART NUMBER CODING:

 WS104D10-0
 WP104D1032-06

TABLE I

| BOLT SIZE | T THREAD CLASS 3B | ØB ±.003 | ØC | E |
|-----------|----------------------|-------------|------|-----|
| 440 | .1120-40UNJC | .216 | .375 | 13° |
| 632 | .1380-32UNJC | .309 | .500 | 13° |
| 832 | .1640-32UNJC | .309 | .500 | 13° |
| 1032 | .1900-32UNJF | .341 | .625 | 13° |
| 428 | .2500-28UNJF | .403 | .750 | 14° |
| 524 | .3125-24UNJF | .497 | .875 | 14° |

TABLE II

| MATL CODE | MATERIAL | FINISH |
|-----------|---|--|
| 0 | AL ALLOY, GRADE 2024, TEMPER T4 OR T351 PER SAE-AMS-QQ-A-225/6 | ANODIZE PER MIL-A-8625 TYPE I |
| 6 | CORROSION RESISTANT STEEL, TYPE 303 CRES PER ASTM A 582 | PASSIVATE PER ASTM-A967 |
| 9 | CARBON STEEL PER ASTM A 108 | CAD PLATE PER SAE-AMS-QQ-P-416, TYPE II, CLASS 2 |

TABLE III

| PANEL THICKNESS MINIMUM | LENGTH CODE | SLEEVE | | LENGTH CODE | PLUG | |
|-------------------------|-------------|-----------------|------|-------------|--------------------------|------|
| | | G | | | H | |
| | | SIZE CODE | | | SIZE CODE | |
| | | 4, 6, 8, 10, 25 | 31 | | 440, 632, 832, 1032, 428 | 524 |
| .245 | 0 | .094 | NA | 04 | .151 | NA |
| .276 | 1 | .125 | | | | |
| .307 | 2 | .156 | | | | |
| .338 | 3 | .187 | | | | |
| .375 | 0 | .094 | NA | 06 | .281 | NA |
| .406 | 1 | .125 | | | | |
| .437 | 2 | .156 | | | | |
| .468 | 3 | .187 | | | | |
| .495 | 0 | NA | .094 | 08 | NA | .401 |
| .526 | 1 | | .125 | | | |
| .557 | 2 | | .156 | | | |
| .588 | 3 | | .187 | | | |
| .620 | 0 | NA | .094 | 10 | NA | .526 |
| .651 | 1 | | .125 | | | |
| .682 | 2 | | .156 | | | |
| .713 | 3 | | .187 | | | |
| .745 | 0 | NA | .094 | 12 | NA | .651 |
| .776 | 1 | | .125 | | | |
| .807 | 2 | | .156 | | | |
| .838 | 3 | | .187 | | | |

NOTES:

1. ANY COMBINATION OF SLEEVE AND PLUG WITHIN BOLT SIZE MAY BE USED.
2. REFER TO TABLE III TO SELECT PLUG/SLEEVE COMBINATION FOR A GIVEN PANEL THICKNESS.
3. THE W104 THIN SERIES GROMMETS ARE SELF-RETAINED THROUGH A TELESCOPIC PRESS FIT.
4. CONSULT THE WITTEN COMPANY ENGINEERING DEPARTMENT FOR OTHER FINISHES, MATERIALS, OR SIZES.

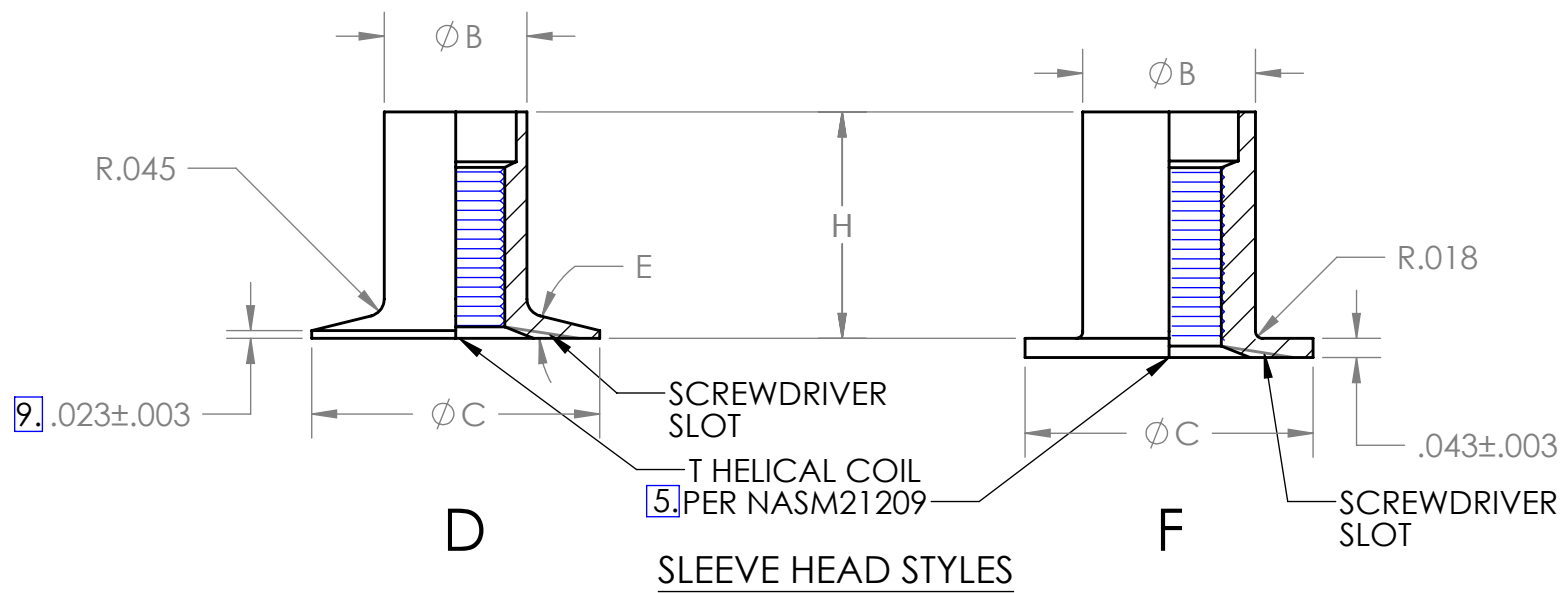
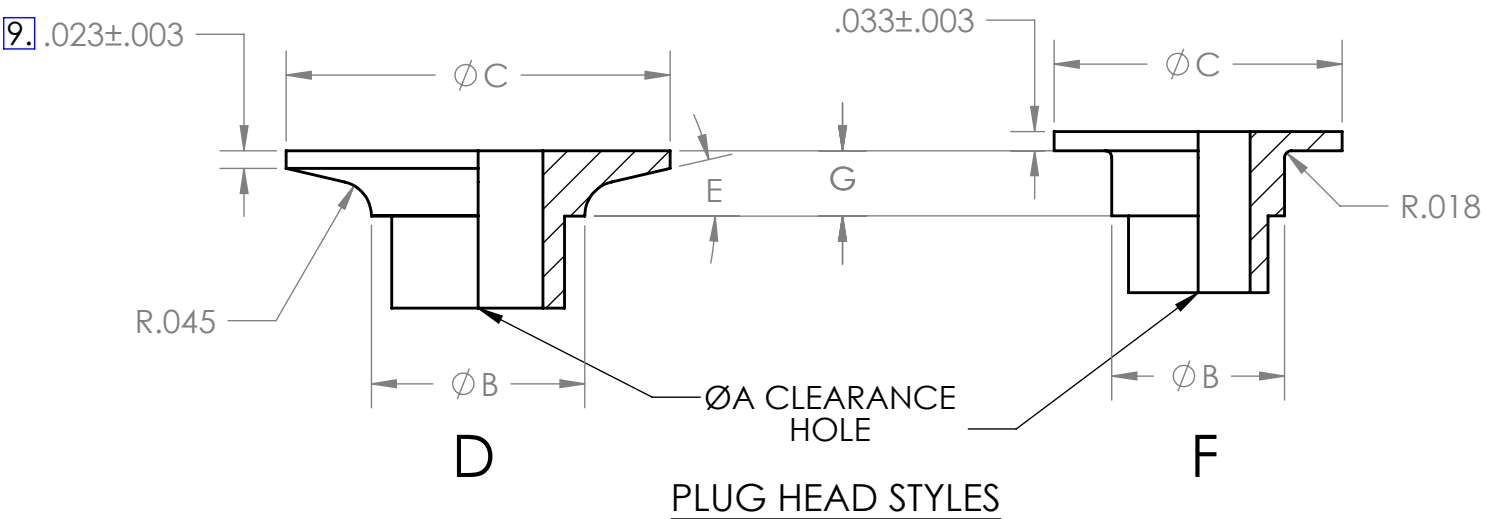
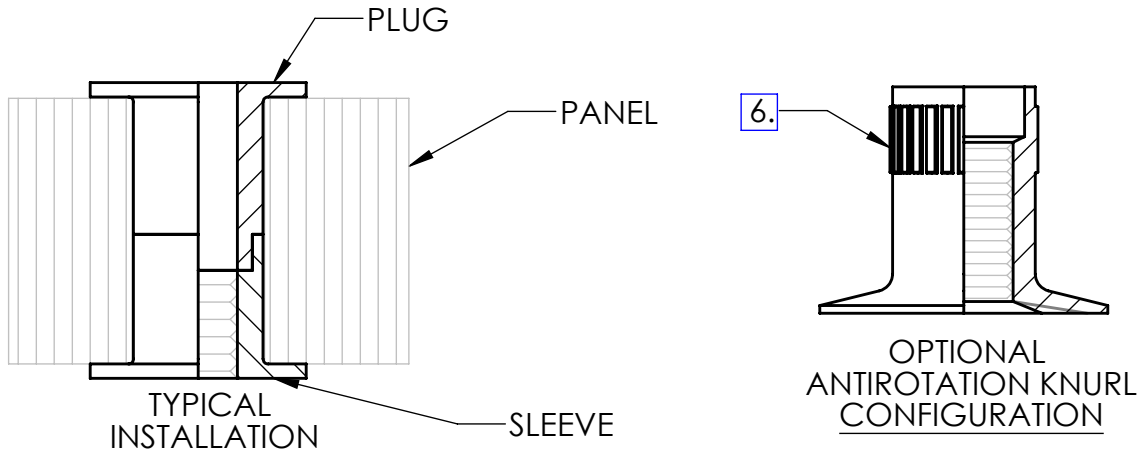
 WITTEN COMPANY
 918-272-9567

APPROVAL DATE: REV:A 7/7/2021

GAGE CODE: 0JHK5

W106

INSERT: GROMMET TYPE, THREADED, SELF-LOCKING, HELICAL COIL



WITTEN COMPANY
918-272-9567

APPROVAL DATE: REV:A 11/10/2020

GAGE CODE: 0JHK5


W106

INSERT: GROMMET TYPE, THREADED, SELF-LOCKING, HELICAL COIL

PART NUMBER CODING:

WP106D25 -11

WS106D428-14K

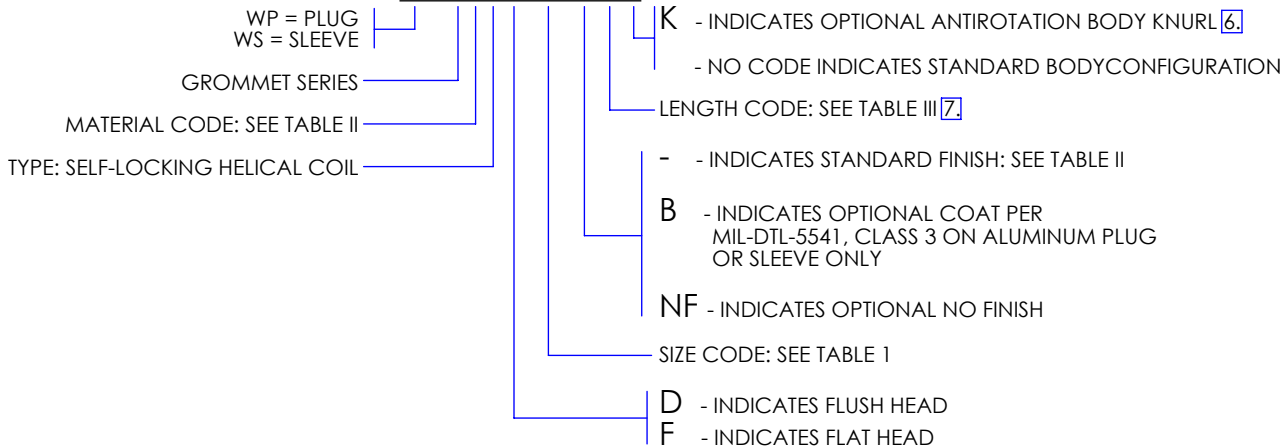
TABLE I

| SIZE CODE | | T THREAD CLASS 3B | ØA ±.003 | ØB ±.003 | ØC | E | INSTALLATION HOLE Ø |
|-----------|--------|----------------------|-------------|-------------|------|-----|------------------------|
| PLUG | SLEEVE | | | | | | |
| 6 | 632 | .1380-32UNJC | .144 | .309 | .500 | 13° | .323 |
| 8 | 832 | .1640-32UNJC | .169 | .309 | .500 | 13° | .323 |
| 10 | 1032 | .1900-32UNJF | .194 | .341 | .625 | 13° | .358 |
| 25 | 428 | .2500-28UNJF | .257 | .403 | .750 | 14° | .421 |
| 31 | 524 | .3125-24UNJF | .318 | .497 | .875 | 14° | .515 |

TABLE II

| MATL CODE | MATERIAL | FINISH |
|--------------|---|---|
| 0 | AL ALLOY, GRADE 2024, TEMPER T4 OR T351 PER SAE-AMS-QQ-A-225/6 | COAT PER MIL-DTL-5541 CLASS 1A |
| 6 | CORROSION RESISTANT STEEL, TYPE 303 CRES PER ASTM A 582/582M | PASSIVATE PER ASTM-A967 |
| 9 | CARBON STEEL PER ASTM A 108 | CAD PLATE PER SAE-AMS-QQ-P-416, TYPE II, CLASS 2 |

NOTES:

1. DIMENSIONING AND TOLERANCING PRACTICES PER ASME Y14.5M-2018.
2. DIMENSIONAL LIMITS APPLY AFTER PLATING.
3. DEBURR AND BREAK ALL SHARP EDGES .005 - .015.
4. SURFACE TEXTURE: 125 MICROINCHES PER ASME B46.1-2019.
- [5](#). THREADS PER AS8879.
- [6](#). WHEN APPLICABLE, STRAIGHT OR DIAMOND KNURL ANTIROTATION KNURL ON SLEEVE ONLY (MANUFACTURER'S OPTION).
- [7](#). REFER TO TABLE III TO SELECT PLUG/SLEEVE COMBINATION FOR A GIVEN PANEL THICKNESS.
8. THE W106 GROMMETS ARE SELF-RETAINED THROUGH A TELESCOPE FIT.
- [9](#). 'D' HEAD STYLE PARTS SPECIFIED WITH A 31 OR 524 SIZE CODE REQUIRE A FLANGE THICKNESS OF .033±.003.
- [10](#). INSERTS WITH LENGTH CODES 22 OR GREATER MAY USE FACTORY INSTALLED SLEEVE EXTENSIONS (TWO PIECE SLEEVES).
11. CONSULT THE WITTEN COMPANY ENGINEERING DEPARTMENT FOR OTHER FINISHES, MATERIALS, OR SIZES.

 WITTEN COMPANY
 918-272-9567

 APPROVAL DATE:
 REV:A 11/10/2020

GAGE CODE: 0JHK5

W106

INSERT: GROMMET TYPE, THREADED, SELF-LOCKING, HELICAL COIL

TABLE III

| PANEL THICKNESS MINIMUM | LENGTH CODE | PLUG | | | LENGTH CODE | SLEEVE | | |
|-------------------------|-------------|---------------|------|------|-------------|----------------|------|------|
| | | G+.000/- .010 | | | | H+.000/- .010 | | |
| | | SIZE CODE | | | | SIZE CODE | | |
| | | 6,8,10 | 25 | 31 | | 632, 832, 1032 | 428 | 524 |
| .500 | 0 | .085 | | | 08 | .415 | NA | NA |
| .516 | 01 | .101 | | | | | | |
| .531 | 1 | .116 | | | | | | |
| .547 | 11 | .132 | | | | | | |
| .562 | 2 | .147 | NA | NA | | | | |
| .578 | 21 | .163 | | | | | | |
| .594 | 3 | .179 | | | | | | |
| .609 | 31 | .194 | | | | | | |
| .625 | 0 | .085 | .085 | | 10 | .540 | .540 | NA |
| .641 | 01 | .101 | .101 | | | | | |
| .656 | 1 | .116 | .116 | NA | | | | |
| .672 | 11 | .132 | .132 | | | | | |
| .688 | 2 | .147 | .147 | | | | | |
| .703 | 21 | .163 | .163 | | | | | |
| .719 | 3 | .179 | .179 | | | | | |
| .734 | 31 | .194 | .194 | | | | | |
| .750 | 0 | .085 | .085 | | 12 | .665 | .665 | NA |
| .766 | 01 | .101 | .101 | NA | | | | |
| .781 | 1 | .116 | .116 | | | | | |
| .797 | 11 | .132 | .132 | | | | | |
| .812 | 2 | .147 | .147 | | | | | |
| .828 | 21 | .163 | .163 | | | | | |
| .844 | 3 | .179 | .179 | | | | | |
| .859 | 31 | .194 | .194 | | | | | |
| .875 | 0 | .085 | .085 | .248 | 14 | .790 | .790 | .627 |
| .891 | 01 | .101 | .101 | .264 | | | | |
| .906 | 1 | .116 | .116 | .279 | | | | |
| .922 | 11 | .132 | .132 | .295 | | | | |
| .938 | 2 | .147 | .147 | .311 | | | | |
| .953 | 21 | .163 | .163 | .326 | | | | |
| .969 | 3 | .179 | .179 | .342 | | | | |
| .984 | 31 | .194 | .194 | .357 | | | | |
| 1.000 | 0 | .085 | .085 | .248 | 16 | .915 | .915 | .752 |
| 1.016 | 01 | .101 | .101 | .264 | | | | |
| 1.031 | 1 | .116 | .116 | .279 | | | | |
| 1.047 | 11 | .132 | .132 | .295 | | | | |
| 1.062 | 2 | .147 | .147 | .311 | | | | |
| 1.078 | 21 | .163 | .163 | .326 | | | | |
| 1.094 | 3 | .179 | .179 | .342 | | | | |
| 1.109 | 31 | .194 | .194 | .357 | | | | |



W106

INSERT: GROMMET TYPE, THREADED, SELF-LOCKING, HELICAL COIL


TABLE III (CONT.)

| PANEL THICKNESS MINIMUM | LENGTH CODE | PLUG | | | LENGTH CODE | SLEEVE | | |
|-------------------------|-------------|---------------|------|------|---|----------------|-------|-------|
| | | G+.000/- .010 | | | | H+.000/- .010 | | |
| | | SIZE CODE | | | | SIZE CODE | | |
| | | 6,8,10 | 25 | 31 | | 632, 832, 1032 | 428 | 524 |
| 1.125 | 0 | .085 | .085 | .248 | 18 | 1.040 | 1.040 | .877 |
| 1.141 | 01 | .101 | .101 | .264 | | | | |
| 1.156 | 1 | .116 | .116 | .279 | | | | |
| 1.172 | 11 | .132 | .132 | .295 | | | | |
| 1.188 | 2 | .147 | .147 | .311 | | | | |
| 1.203 | 21 | .163 | .163 | .326 | | | | |
| 1.219 | 3 | .179 | .179 | .342 | | | | |
| 1.234 | 31 | .194 | .194 | .357 | | | | |
| 1.250 | 0 | .085 | .085 | .248 | 20 | 1.165 | 1.165 | 1.002 |
| 1.266 | 01 | .101 | .101 | .264 | | | | |
| 1.281 | 1 | .116 | .116 | .279 | | | | |
| 1.297 | 11 | .132 | .132 | .295 | | | | |
| 1.312 | 2 | .147 | .147 | .311 | | | | |
| 1.328 | 21 | .163 | .163 | .326 | | | | |
| 1.344 | 3 | .179 | .179 | .342 | | | | |
| 1.359 | 31 | .194 | .194 | .357 | | | | |
| 1.375 | 0 | .085 | .085 | .248 | 22 10 | 1.290 | 1.290 | 1.127 |
| 1.391 | 01 | .101 | .101 | .264 | | | | |
| 1.406 | 1 | .116 | .116 | .279 | | | | |
| 1.422 | 11 | .132 | .132 | .295 | | | | |
| 1.438 | 2 | .147 | .147 | .311 | | | | |
| 1.453 | 21 | .163 | .163 | .326 | | | | |
| 1.469 | 3 | .179 | .179 | .342 | | | | |
| 1.484 | 31 | .194 | .194 | .357 | | | | |
| 1.500 | 0 | .085 | .085 | .248 | 24 10 | 1.415 | 1.415 | 1.252 |
| 1.516 | 01 | .101 | .101 | .264 | | | | |
| 1.531 | 1 | .116 | .116 | .279 | | | | |
| 1.547 | 11 | .132 | .132 | .295 | | | | |
| 1.562 | 2 | .147 | .147 | .311 | | | | |
| 1.578 | 21 | .163 | .163 | .326 | | | | |
| 1.594 | 3 | .179 | .179 | .342 | | | | |
| 1.609 | 31 | .194 | .194 | .357 | | | | |
| 1.625 | 0 | .085 | .085 | .248 | 26 10 | 1.540 | 1.540 | 1.377 |
| 1.641 | 01 | .101 | .101 | .264 | | | | |
| 1.656 | 1 | .116 | .116 | .279 | | | | |
| 1.672 | 11 | .132 | .132 | .295 | | | | |
| 1.688 | 2 | .147 | .147 | .311 | | | | |
| 1.703 | 21 | .163 | .163 | .326 | | | | |
| 1.719 | 3 | .179 | .179 | .342 | | | | |
| 1.734 | 31 | .194 | .194 | .357 | | | | |

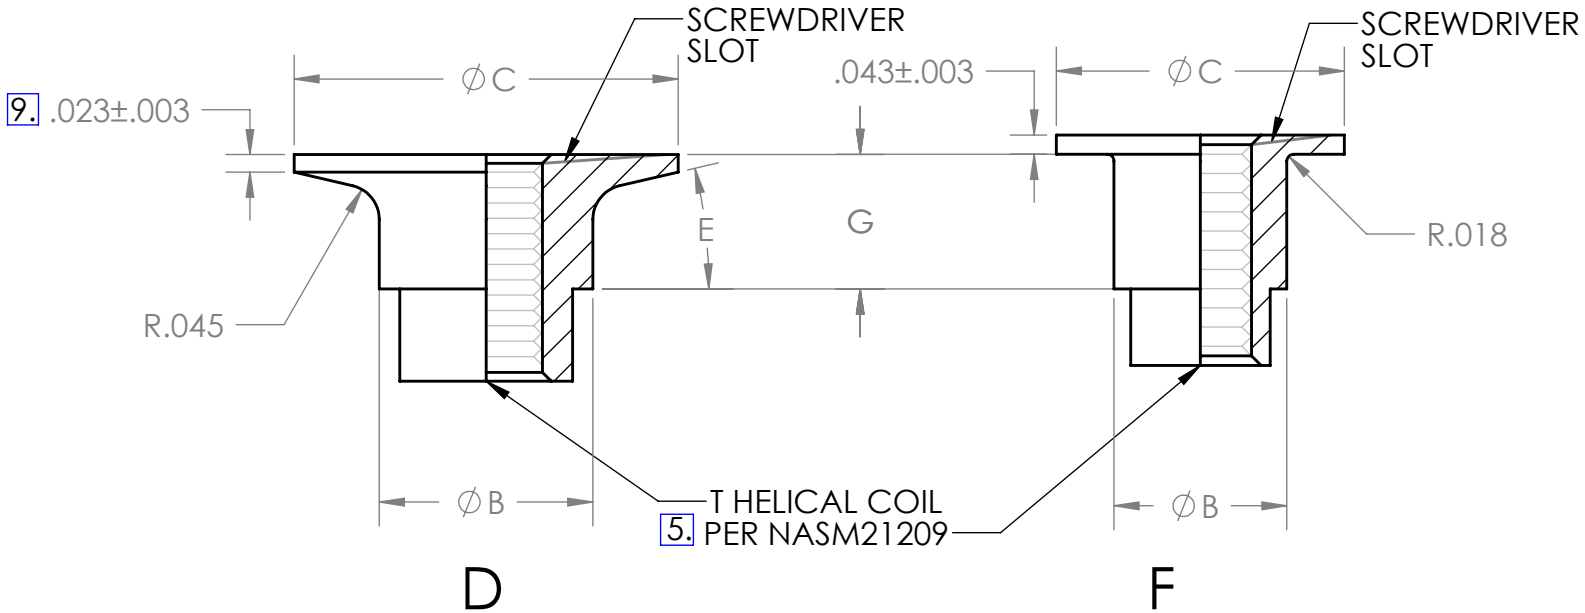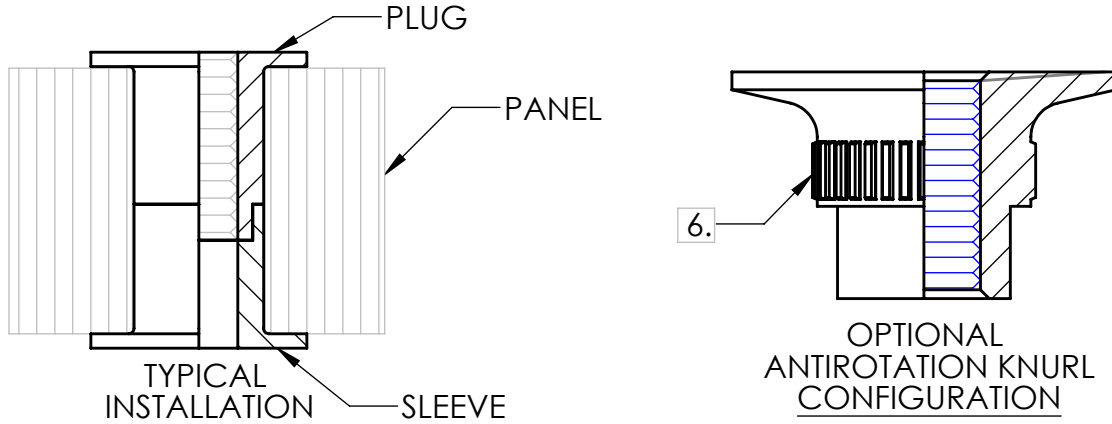W106 THIN SERIES
INSERT: GROMMET TYPE, THREADED, SELF-LOCKING, HELICAL COIL, THIN PANEL



PLUG HEAD STYLES

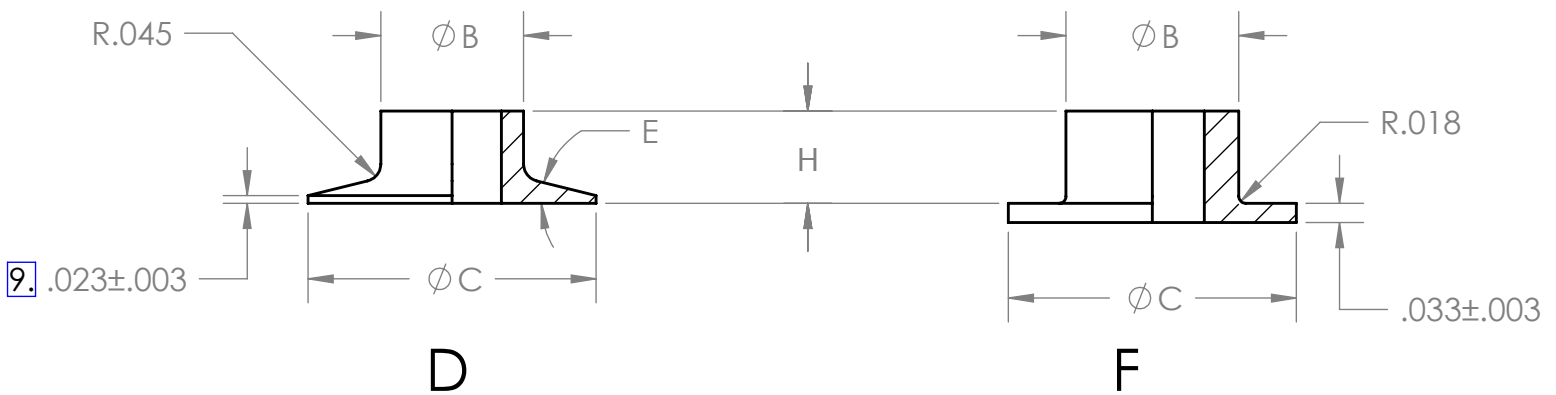

SLEEVE HEAD STYLES


W106 THIN SERIES

INSERT: GROMMET TYPE, THREADED, SELF-LOCKING, HELICAL COIL, THIN PANEL

PART NUMBER CODING:

WP106D832-06K

WS106D 8 -11

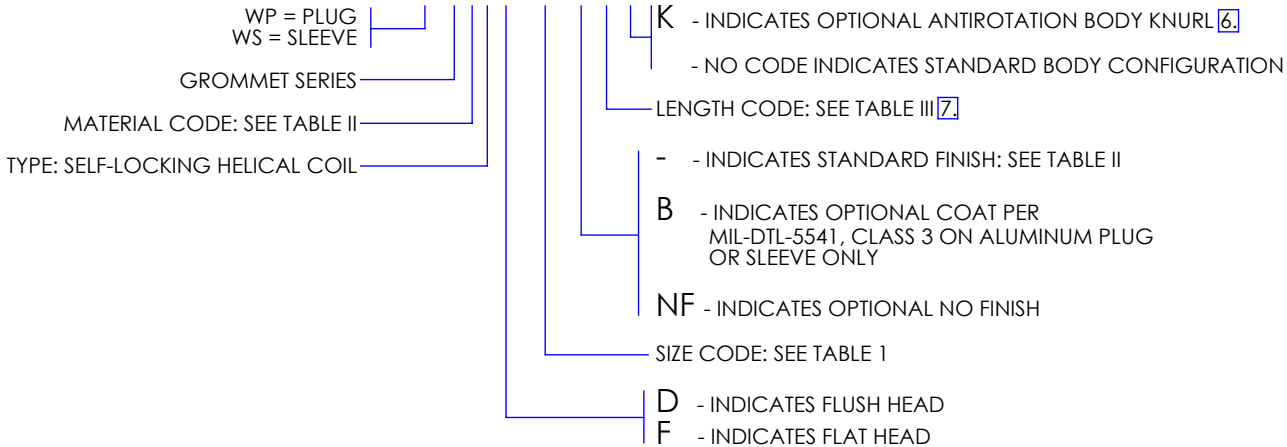
TABLE I

| SIZE CODE | | T THREAD CLASS 3B | ØB ±.003 | ØC | E | INSTALLATION HOLE Ø |
|-----------|--------|----------------------|-------------|------|-----|------------------------|
| PLUG | SLEEVE | | | | | |
| 632 | 6 | .1380-32UNJC | .309 | .500 | 13° | .323 |
| 832 | 8 | .1640-32UNJC | .309 | .500 | 13° | .323 |
| 1032 | 10 | .1900-32UNJF | .341 | .625 | 13° | .358 |
| 428 | 25 | .2500-28UNJF | .403 | .750 | 14° | .421 |
| 524 | 31 | .3125-24UNJF | .497 | .875 | 14° | .515 |

TABLE II

| MATL CODE | MATERIAL | FINISH |
|--------------|---|---|
| 0 | AL ALLOY, GRADE 2024, TEMPER T4 OR T351 PER SAE-AMS-QQ-A-225/6 | COAT PER MIL-DTL-5541 CLASS 1A |
| 6 | CORROSION RESISTANT STEEL, TYPE 303 CRES PER ASTM A 582/582M | PASSIVATE PER ASTM-A967 |
| 9 | CARBON STEEL PER ASTM A 108 | CAD PLATE PER SAE- AMS-QQ-P- 416, TYPE II, CLASS 2 |

NOTES:

- DIMENSIONING AND TOLERANCING PRACTICES PER ASME Y14.5M-2018.
- DIMENSIONAL LIMITS APPLY AFTER PLATING.
- DEBURR AND BREAK ALL SHARP EDGES .005 - .015.
- SURFACE TEXTURE: 125 MICRONS PER ASME B46.1-2019.
- THREADS PER AS8879.
- WHEN APPLICABLE, STRAIGHT OR DIAMOND KNURL ANTIROTATION KNURL ON PLUG ONLY (MANUFACTURER'S OPTION).
- REFER TO TABLE III TO SELECT PLUG/SLEEVE COMBINATION FOR A GIVEN PANEL THICKNESS.
- THE W106 THIN GROMMETS ARE SELF-RETAINED THROUGH A TELESCOPE FIT.
- 'D' HEAD STYLE PARTS SPECIFIED WITH A 31 OR 524 SIZE CODE REQUIRE A FLANGE THICKNESS OF .033±.003.
- CONSULT THE WITTEN COMPANY ENGINEERING DEPARTMENT FOR OTHER FINISHES, MATERIALS, OR SIZES.

 WITTEN COMPANY
 918-272-9567

APPROVAL DATE: REV:A 11/10/2020

GAGE CODE: 0JHK5

W106 THIN SERIES

INSERT: GROMMET TYPE, THREADED, SELF-LOCKING, HELICAL COIL, THIN PANEL

TABLE III (CONT.)


| PANEL THICKNESS MINIMUM | LENGTH CODE | SLEEVE | | | LENGTH CODE | PLUG | | |
|-------------------------|-------------|---------------|------|------|-------------|----------------|------|------|
| | | H+.000/- .010 | | | | G+.000/- .010 | | |
| | | SIZE CODE | | | | SIZE CODE | | |
| | | 6,8,10 | 25 | 31 | | 632, 832, 1032 | 428 | 524 |
| .250 | 0 | .094 | | | | | | |
| .266 | 01 | .109 | | | | | | |
| .281 | 1 | .125 | | | | | | |
| .297 | 11 | .140 | | | | | | |
| .312 | 2 | .156 | | | 04 | .151 | NA | NA |
| .328 | 21 | .171 | | | | | | |
| .344 | 3 | .187 | | | | | | |
| .359 | 31 | .202 | | | | | | |
| .375 | 0 | .094 | .094 | | | | | |
| .391 | 01 | .109 | .109 | | | | | |
| .406 | 1 | .125 | .125 | | | | | |
| .422 | 11 | .140 | .140 | NA | 06 | .281 | .281 | NA |
| .438 | 2 | .156 | .156 | | | | | |
| .453 | 21 | .171 | .171 | | | | | |
| .469 | 3 | .187 | .187 | | | | | |
| .484 | 31 | .202 | .202 | | | | | |
| .500 | 0 | | .094 | .094 | | | | |
| .516 | 01 | | .109 | .109 | | | | |
| .531 | 1 | | .125 | .125 | | | | |
| .547 | 11 | NA | .140 | .140 | 08 | NA | .401 | .401 |
| .562 | 2 | | .156 | .156 | | | | |
| .578 | 21 | | .171 | .171 | | | | |
| .594 | 3 | | .187 | .187 | | | | |
| .609 | 31 | | .202 | .202 | | | | |
| .625 | 0 | | | .094 | | | | |
| .641 | 01 | | | .109 | | | | |
| .656 | 1 | | | .125 | | | | |
| .672 | 11 | NA | NA | .140 | 10 | NA | NA | .526 |
| .688 | 2 | | | .156 | | | | |
| .703 | 21 | | | .171 | | | | |
| .719 | 3 | | | .187 | | | | |
| .734 | 31 | | | .202 | | | | |
| .750 | 0 | | | .094 | | | | |
| .766 | 01 | | | .109 | | | | |
| .781 | 1 | | | .125 | | | | |
| .797 | 11 | NA | NA | .140 | 12 | NA | NA | .651 |
| .812 | 2 | | | .156 | | | | |
| .828 | 21 | | | .171 | | | | |
| .844 | 3 | | | .187 | | | | |
| .859 | 31 | | | .202 | | | | |

W719

INSERT, POTTED-IN, BLIND THREADED, THREAD LOCKING, LIGHTWEIGHT

CROSS REFERENCE

| WITTEN | STANDARDS/OTHER | SHUR-LOK | THE YOUNG ENGINEERS | ALCOA/TRIDAIR |
|--------|---------------------|------------------|---------------------|---------------|
| W719 | CDIN13 (C&D ZODIAC) | SL2748 SL2899 | TYE2048 | |

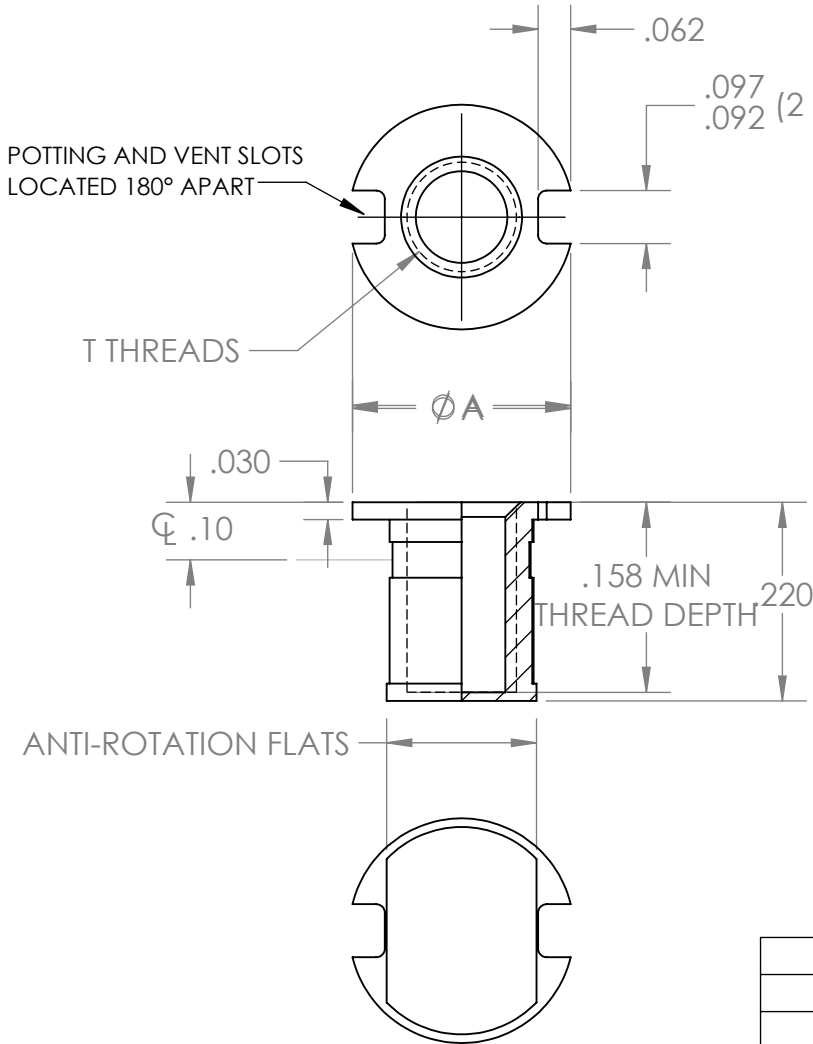


| FIRST DASH NO | T THREAD CLASS | A° | INSTALLATION HOLE |
|---------------|------------------|------|-------------------|
| -06 | .1380-32 UNJC 3B | .310 | .311-.317 |
| -08 | .1640-32 UNJC 3B | .341 | .342-.348 |
| -3 | .1900-32 UNJF 3B | .390 | .392-.398 |

| MAT'L CODE | MATERIAL | FINISH |
|------------|--|--|
| - | CARBON STEEL PER ASTM A108 ULT TENSILE STRENGTH 85 KSI | CAD PLATE PER QQ-P-416, TYPE II, CLASS 2 |
| A | AL ALLOY 2024-T4 OR T351 PER AMS-QQ-A-225/6 | ANODIZE PER AMS-A-8625 TYPE I, CLASS 1 |
| C | CRES 303 PER ASTM-A582 | PASSIVATE PER ASTM-A967 |

| FINISH CODE | SPECIAL FINISH |
|-------------|---|
| M | DRI-FILM LUBE PER AS5272, TYPE I IN THREAD AREA ONLY. |
| S | SILVER PATE PER AMS 2410 |
| P | CADMIUM PLATE ON CRES INSERT PER QQ-P-416 TY II, CLASS 2. |

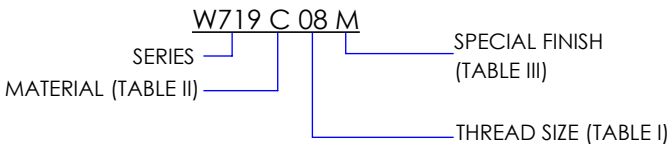EXAMPLE PART NUMBERING SYSTEM




1. AN ADHESIVE BACKED INSTALLATION TAB IS INCLUDED WITH EACH INSERT.
2. THREAD LOCK PER NASM25027.
3. THREADS PER AS8879, CLASS 3B
4. PLATING OR DRY FILM LUBRICANT IS RECOMMENED ON SELF-LOCKING CRES INSERTS.

W1832


INSERT, MOLDED IN, BLIND THREADED,
LOCKING, NON-LOCKING, SANDWICH PANEL

CROSS REFERENCE

| WITTEN | STANDARDS/OTHER | SHUR-LOK | THE YOUNG ENGINEERS | ALCOA/TRIDAIR |
|--------|----------------------------------|----------|---------------------|---------------|
| W1832 | NAS1832 / CDIN08 (C&D ZODIAC) | SL602 | TYE2002 | D1832 |

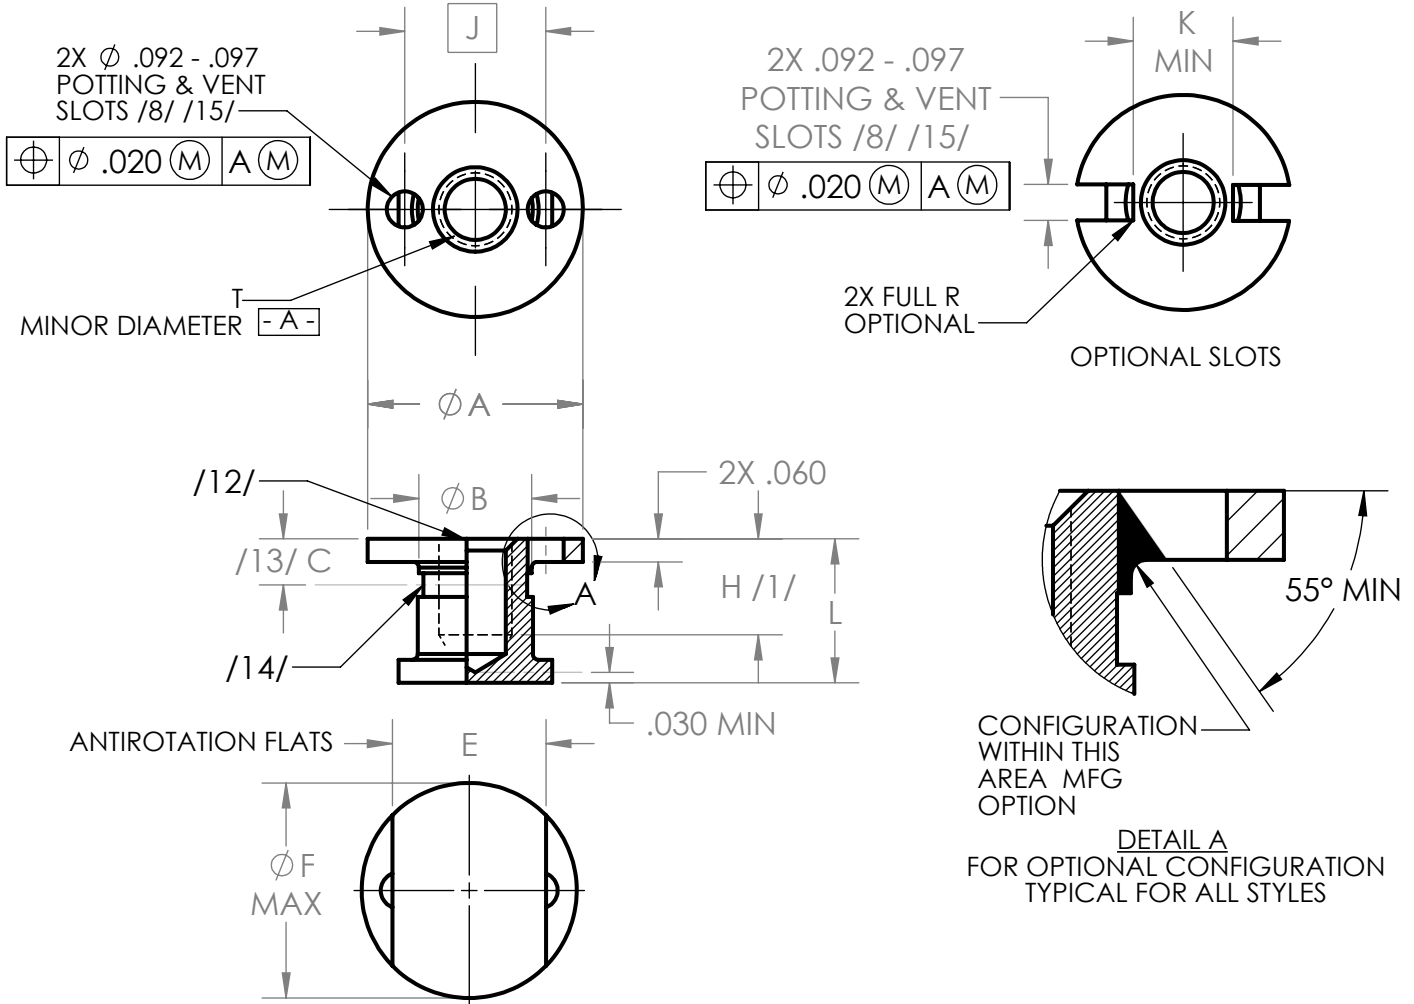

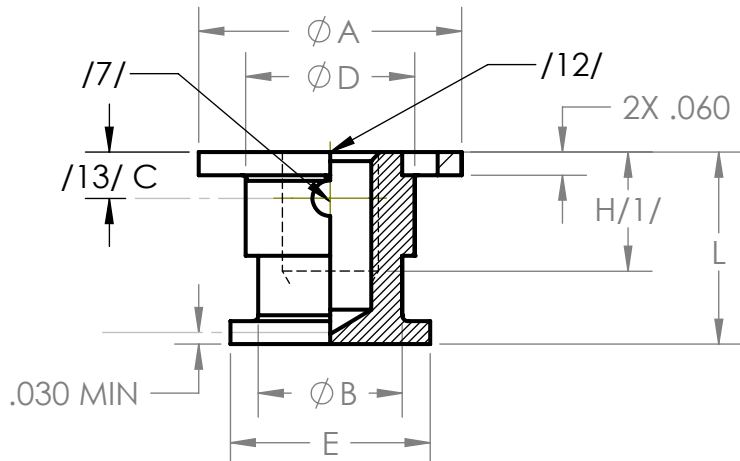ALL STEEL AND CRES LOCKING AND NON-LOCKING OR NON-LOCKING ALUMINUM STYLE



ALUMINUM LOCKING STYLE OR ALTERNATE NON-LOCKING ALUMINUM STYLE

W1832

INSERT, MOLDED IN, BLIND THREADED,
LOCKING, NON-LOCKING, SANDWICH PANEL

CROSS REFERENCE

| WITTEN | STANDARDS/OTHER | SHUR-LOK | THE YOUNG ENGINEERS | ALCOA/TRIDAIR |
|--------|-------------------------------|----------|---------------------|---------------|
| W1832 | NAS1832 / CDIN08 (C&D ZODIAC) | SL602 | TYE2002 | D1832 |

TABLE I - IMPERIAL DIMENSIONS

| SIZE DASH NO | T THREAD /3/ | ØA +0.00 -0.10 | ØB | C | ØD | E | ØF MAX | H MIN /1/ | J BASIC | K MIN | L MIN /2/ |
|--------------|--------------------|----------------------|------|-----|------|------|-----------|-----------------|------------|----------|-----------------|
| 04 | .1120-40 UNJC | .560 | .300 | .12 | .375 | .400 | .560 | .25 | .367 | .260 | .37 |
| 06 | .1380-32 UNJC | .560 | .300 | .12 | .375 | .400 | .560 | .25 | .367 | .260 | .37 |
| 08 | .1640-32 UNJC | .560 | .300 | .12 | .375 | .400 | .560 | .25 | .367 | .260 | .37 |
| 3 | .1900-32 UNJF | .560 | .300 | .12 | .375 | .400 | .560 | .25 | .367 | .260 | .37 |
| 4 | .2500-28 UNJF | .685 | .375 | .14 | .440 | .520 | .685 | .31 | .467 | .360 | .50 |
| 5 | .3125-24 UNJF | .685 | .475 | .16 | .500 | .520 | .685 | .31 | .467 | .360 | .50 |
| 6 | .3750-24 UNJF | .841 | .500 | .22 | .550 | .560 | .841 | .37 | .591 | .484 | .50 |

TABLE IA - METRIC DIMENSIONS

| SIZE DASH NO | T THREAD /3/ | ØA +0.00 -0.25 | ØB | C | ØD | E | ØF MAX | H MIN /1/ | J BASIC | K MIN | L MIN /2/ |
|--------------|--------------------|----------------------|-------|-----|-------|-------|-----------|-----------------|------------|----------|-----------------|
| M3 | M3X0.5-4H6H | 14.22 | 7.62 | 3.0 | 9.52 | 10.16 | 14.22 | 6.4 | 9.32 | 6.60 | 9.5 |
| M3.5 | M3.5X0.6-4H6H | 14.22 | 7.62 | 3.0 | 9.52 | 10.16 | 14.22 | 6.4 | 9.32 | 6.60 | 9.5 |
| M4 | M4X0.7-4H6H | 14.22 | 7.62 | 3.0 | 9.52 | 10.16 | 14.22 | 6.4 | 9.32 | 6.60 | 9.5 |
| M5 | M5X0.8-4H6H | 14.22 | 7.62 | 3.0 | 9.52 | 10.16 | 14.22 | 6.4 | 9.32 | 6.60 | 9.5 |
| M6 | M6X1-4H5H | 17.40 | 9.52 | 3.6 | 11.18 | 13.21 | 17.40 | 7.9 | 11.86 | 9.14 | 12.7 |
| M8 | M8X1.25-4H5H | 17.40 | 12.06 | 4.1 | 12.70 | 13.21 | 17.40 | 7.9 | 11.86 | 9.14 | 12.7 |
| M10 | M10X1.5-4H5H | 21.36 | 12.70 | 5.6 | 13.97 | 14.22 | 21.36 | 9.4 | 15.01 | 12.29 | 12.7 |

TABLE II - IMPERIAL INSTALLATION DATA

| SIZE DASH NO | INSTALLATION TAB P/N /6/ | INSTALLATION HOLE SIZE |
|--------------|--------------------------|------------------------|
| 04 | 2007-367 | .561-.566 |
| 06 | 2007-367 | .561-.566 |
| 08 | 2007-367 | .561-.566 |
| 3 | 2007-367 | .561-.566 |
| 4 | 2007-467 | .686-.691 |
| 5 | 2007-467 | .686-.691 |
| 6 /26/ | 2007-591 | .842-.847 |

TABLE II A- METRIC INSTALLATION DATA

| SIZE DASH NO | INSTALLATION TAB P/N /6/ | INSTALLATION HOLE SIZE |
|--------------|--------------------------|------------------------|
| M3 | 2007-367 | 14.25 - 14.38 |
| M3.5 | 2007-367 | 14.25 - 14.38 |
| M4 | 2007-367 | 14.25 - 14.38 |
| M5 | 2007-367 | 14.25 - 14.38 |
| M6 | 2007-467 | 17.42 - 17.55 |
| M8 | 2007-467 | 17.42 - 17.55 |
| M10 /26/ | 2007-591 | 21.39 - 21.51 |

MATERIAL: CARBON STEEL: PER ASTM A108. ASTM A576, ULTIMATE TENSILE STRENGTH 85 KSI MINIMUM.

AL ALLOY: GRADE 2024 (UNS A92024), TEMPER T4 OR T351 PER AMS-QQ-A-225/6.

CRES: TYPE 303 (UNS S30300) PER ASTM A582/A582M.

LOCKING ELEMENT: POLYAMIDE PER L-P-410.

FINISH: CARBON STEEL: CADMIUM PLATE PER AMS QQ-P-416, TYPE II, CLASS 2.
ZINC PLATE PER ASTM-B633, SC 2, TYPE I.

AL ALLOY: ANODIZE PER MIL-PRF-8625, TYPE 1, CLASS OPTIONAL.
CHEM-FILM PER MIL-DTL-5541, CLASS 1A
CHEM-FILM PER MIL-DTL-5541, CLASS 2
BARE, NO FINISH

CRES: PASSIVATE PER ASTM-A-967, CITRIC 1.
SILVER PLATE PER AMS2410 OR AMS2411.
CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2.
BARE, NO FINISH

LUBRICATION: SOLID FILM LUBRICANT PER AS5272, TYPE OPTIONAL, APPLIED TO THREADS ONLY.

W1832


INSERT, MOLDED IN, BLIND THREADED,
LOCKING, NON-LOCKING, SANDWICH PANEL

CROSS REFERENCE

| WITTEN | STANDARDS/OTHER | SHUR-LOK | THE YOUNG ENGINEERS | ALCOA/TRIDAIR |
|--------|----------------------------------|----------|---------------------|---------------|
| W1832 | NAS1832 / CDIN08 (C&D ZODIAC) | SL602 | TYE2002 | D1832 |

PART NUMBERING SYSTEM

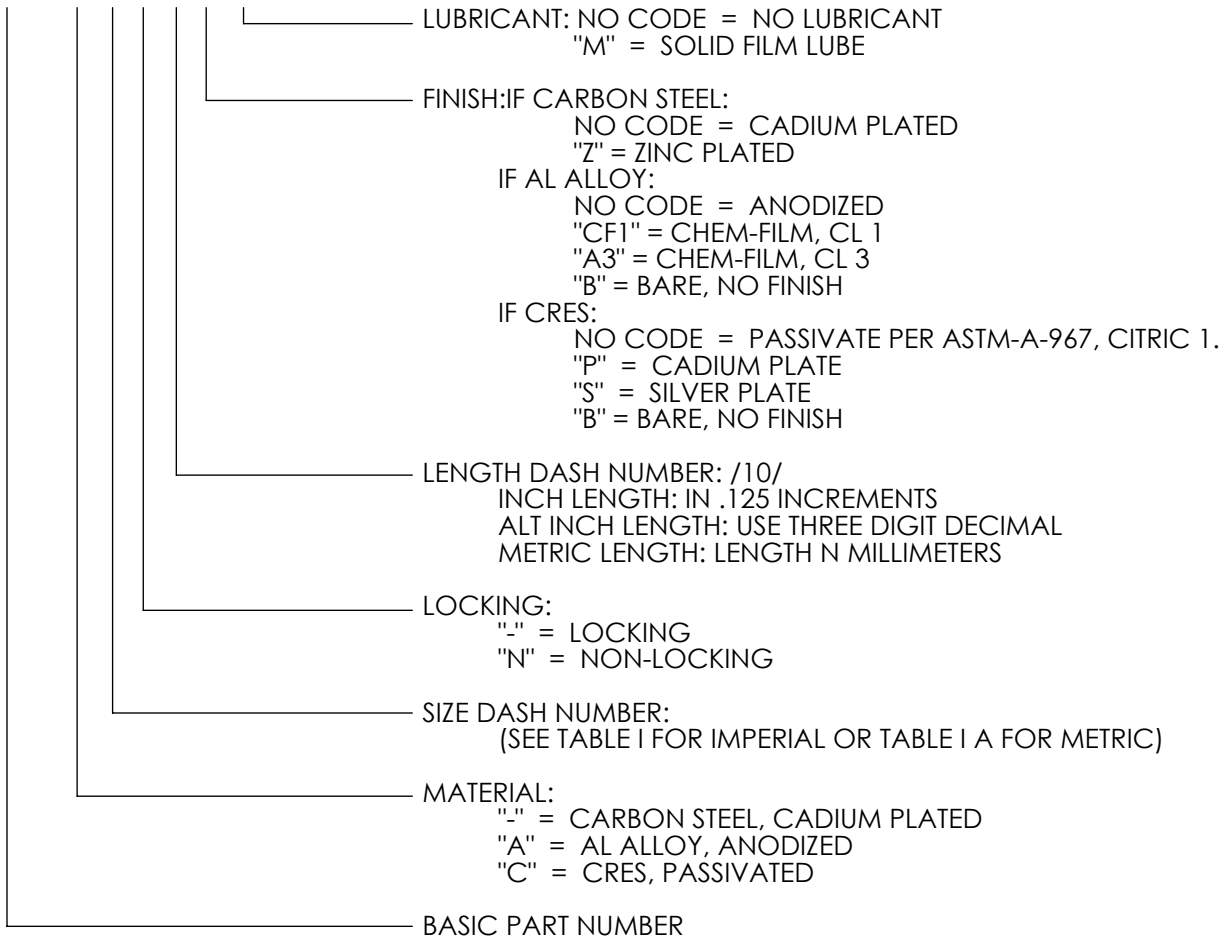W1832 C 5 N 4 P M



EXAMPLE OF PART NUMBER:

- W1832C5N4M = INSERT, CRES, .3125-24 UNJF THREAD, NON-LOCKING, .500 LONG, PASSIVATE PER ASTM-A-967, CITRIC 1., SOLID FILM LUBRICATED.
- W1832-3-4M = INSERT, CARBON STEEL, .1900-32 UNJF-3B THREAD, LOCKING, .500 LONG, CADMIUM PLATED, SOLID FILM LUBRICATED.
- W1832A3N4 = INSERT, AL ALLOY, .1900-32 UNJF-3B THREAD, NON-LOCKING, .500 LONG, ANODIZED, NON-LOCKING, NO LUBRICATION.
- W1832C06-6 = INSERT, CRES, .1380-32 UNJC-3B THREAD, LOCKING, .750 LONG, PASSIVATE PER ASTM-A-967, CITRIC 1., NO LUBRICATION.
- W1832C08-3S = INSERT, CRES, .1640-32 UNJC-3B THREAD, LOCKING, .375 LONG, SILVER PLATED, NO LUBRICATION.
- W1832C08-3P = INSERT, CRES, .1640-32 UNJC-3B THREAD, LOCKING, .375 LONG, CADMIUM PLATED, NO LUBRICATION.
- W1832C5N4 = INSERT, CRES, .3125-24 UNJF-3B THREAD, NON-LOCKING, .500 LONG, PASSIVATE PER ASTM-A-967, CITRIC 1., NO LUBRICATION.

W1832

INSERT, MOLDED IN, BLIND THREADED,
LOCKING, NON-LOCKING, SANDWICH PANEL

CROSS REFERENCE

| WITTEN | STANDARDS/OTHER | SHUR-LOK | THE YOUNG ENGINEERS | ALCOA/TRIDAIR |
|--------|----------------------------------|----------|---------------------|---------------|
| W1832 | NAS1832 / CDIN08 (C&D ZODIAC) | SL602 | TYE2002 | D1832 |

NOTES:

- /1/ THE MINIMUM FULL THREAD DEPTH "H" SHALL BE TWO TIMES THE NOMINAL THREAD DIAMETER WHERE LENGTH PERMITS.
- /2/ MINIMUM LENGTH WHICH MAY BE SPECIFIED.
- /3/ IMPERIAL THREADS PER AS8879, CLASS 3B. METRIC THREADS PER FED-STD-H28/21
- (4) NOT USED
- (5) TOLERANCES UNLESS OTHERWISE SPECIFIED: .XXX ± .010 .XX ± .02.
- (6) AN ADHESIVE-BACKED INSTALLATION TAB PER NAS1837 (PLASTIC PER WITTEN 2007) SHALL BE FURNISHED WITH INSERT. THE INSTALLATION TAB SUPPORTS THE INSERT DURING THE POTTING PROCESS AND IS REMOVED AND DISCARDED ONCE POTTING IS CURED.
- /7/ NONMETALLIC THREAD LOCK WHEN APPLICABLE. LOCATE PELLET NO CLOSER THAN 10° FROM EDGE OF EITHER POTTING HOLE OR SLOT.
- /8/ BURRS AROUND POTTING HOLES OR SLOTS PERMISSIBLE UNDER FLANGE.
- (9) PLATING OR SOLID FILM LUBRICANT IS RECOMMENDED ON LOCKING CRES INSERTS.
- /10/ SELECT A LENGTH WHICH WILL ALLOW A MINIMUM OF .040 CLEARANCE BETWEEN BOTTOM OF INSERT AND INSIDE SURFACE OF BOTTOM SKIN.
- (11) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M.
- /12/ MINIMUM "GO" THREAD GAGE PENETRATION SHALL BE ONE HALF REVOLUTION BEFORE LUBRICATION. MINIMUM BOLT THREAD PENETRATION SHALL BE THREE QUARTER REVOLUTION AFTER LUBRICATION.
- /13/ CENTERLINE OF THREAD LOCK WHEN APPLICABLE.
- /14/ SHANK DEFORMED THIS AREA TO PROVIDE THREAD LOCK WHEN APPLICABLE.
- /15/ ORIENTATION OF POTTING AND VENT HOLES OR SLOTS RELATIVE TO THE ANTI ROTATION FLAT IS MANUFACTURER'S OPTION.
- (16) DIMENSIONS IN INCHES OR MILLIMETERS.
- /17/ NOT USED.
- (18) ALL DIAMETERS SHALL BE WITHIN .010 CIRCULAR RUNOUT TO DATUM A.
- (19) DIMENSIONS APPLY AFTER FINISH AND PRIOR TO APPLICATION OF LUBRICATION UNLESS OTHERWISE SPECIFIED.
- (20) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (21) REMOVE ALL BURRS AND SHARP EDGES.
- (22) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (23) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.

W1835

INSERT, MOLDED IN, BLIND THREADED, LOCKING, NONSELF-LOCKING, FLOATING, SANDWICH PANEL

CROSS REFERENCE

| WITTEN | STANDARDS/OTHER | SHUR-LOK | THE YOUNG ENGINEERS | ALCOA/TRIDAIR |
|--------|-----------------|----------|---------------------|---------------|
| W1835 | NAS1835 SERIES | SL606 | TYE1835 | D1835 SERIES |

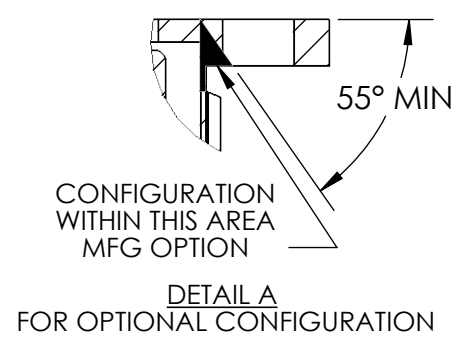

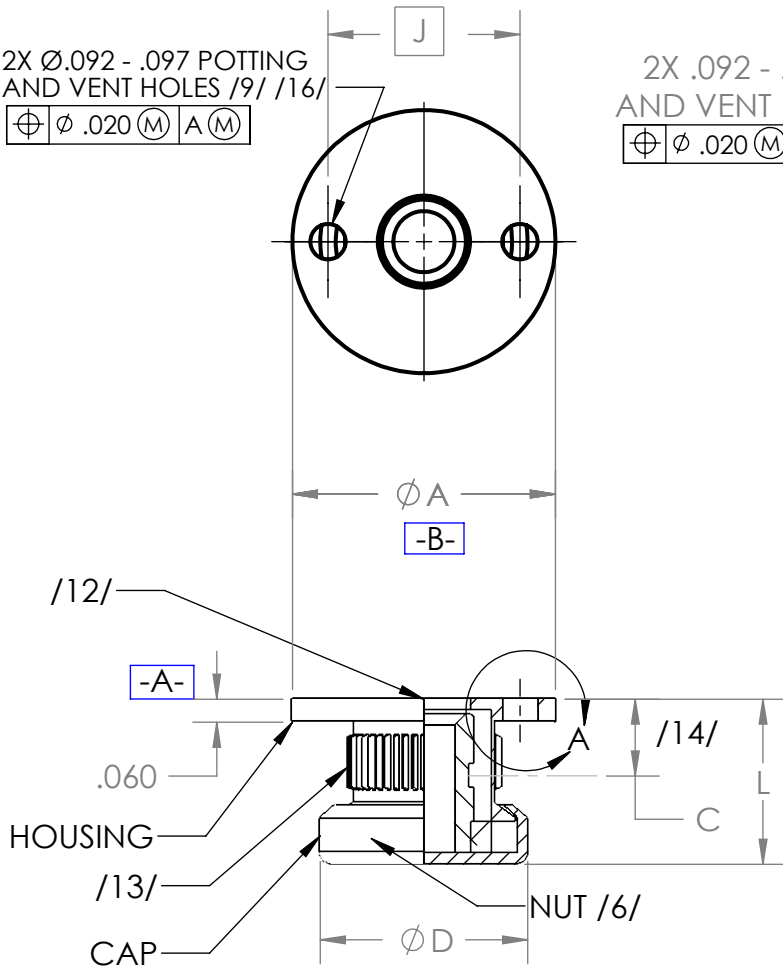


TABLE I - DIMENSIONS

| SIZE DASH NO. | THREAD CLASS 3B /1/ | $\varnothing A$ +.000 - .010 | C | $\varnothing D$ MAX | J BASIC | K MIN | L /7/ | INSTALLATION HOLE SIZE |
|---------------|---------------------|------------------------------|-----|---------------------|---------|-------|-------|------------------------|
| 08 | .1640-32 UNJC | .685 | .16 | .545 | .500 | .393 | .37 | .686 - .691 |
| 3 | .1900-32 UNJF | .685 | .16 | .545 | .500 | .393 | .43 | .686 - .691 |
| 4 | .2500-28 UNJF | .748 | .18 | .735 | .591 | .484 | .56 | .749 - .755 |
| 5 | .3125-24 UNJF | .810 | .20 | .800 | .655 | .548 | .75 | .811 - .817 |
| 6 | .3750-24 UNJF | .873 | .22 | .865 | .718 | .611 | .81 | .874 - .880 |

W1835

CROSS REFERENCE

INSERT, MOLDED IN, BLIND THREADED, LOCKING, NONSELF-LOCKING, FLOATING, SANDWICH PANEL

| WITTEN | STANDARDS/OTHER | SHUR-LOK | THE YOUNG ENGINEERS | ALCOA/TRIDAIR |
|--------|-----------------|----------|---------------------|---------------|
| W1835 | NAS1835 SERIES | SL606 | TYE1835 | D1835 SERIES |


| MATL CODE | TABLE II -- ITEM, MATERIAL, AND STANDARD FINISH | | |
|-----------|--|--|--|
| | NUT | HOUSING | CAP |
| - | CARBON OR ALLOY STEEL ULTIMATE STRENGTH 85 KSI MIN. CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2 | CARBON OR ALLOY STEEL ULTIMATE STRENGTH 85 KSI MIN. CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2 | AL ALLOY 6061-O, FINISH CHEM FILM PER MIL-DTL-5541. CLASS 1A OR CLASS 3. |
| A | CARBON OR ALLOY STEEL ULTIMATE STRENGTH 85 KSI MIN. CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2 | AL ALLOY 2024-T4. ANODIZE PER MIL-DTL-8625 TYPE I, CLASS OPTIONAL | AL ALLOY 6061-O, FINISH CHEM FILM PER MIL-DTL-5541. CLASS 1A OR CLASS 3. |
| C | CRES 303 PASSIVATE PER ASTM-A967 | CRES 303 PASSIVATE PER ASTM-A967 | |
| D | CRES 303 PASSIVATE PER ASTM-A967 | AL ALLOY 2024-T4. CHEM-FILM PER MIL-DTL-5541. CLASS 1A OR CLASS 3 | |
| G | CARBON OR ALLOY STEEL ULTIMATE STRENGTH 85 KSI MIN. CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2 | CRES 303 PASSIVATE PER ASTM-A967 | |

| TABLE III SPECIAL FINISH | |
|--------------------------|---|
| FINISH CODE | OPTIONAL SPECIAL FINISH |
| P | CAD PLATE PER AMS-QQ-P-416 TYPE II, CLASS 2 ON CRES NUT ONLY. |
| S | SILVER PLATE PER AMS2410, CRES NUT ONLY |

| TABLE IV LUBRICANT | |
|--------------------|---|
| CODE | OPTIONAL SPECIAL FINISH |
| NO CODE | NO LUBRICANT |
| M | SOLID FILM LUBRICANT PER AS5272, TYPE I APPLIED TO NUT ONLY |

CODE:

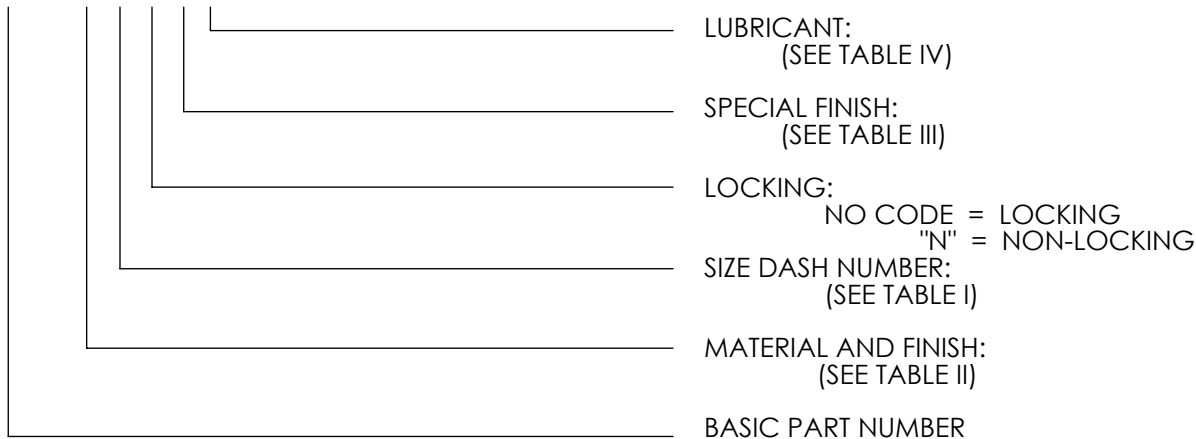W1835 C 4 N P M



EXAMPLE OF PART NUMBER:

- W1835-3M = .1900-32 UNJF-3B THREAD, CARBON STEEL NUT AND HOUSING, CADMIUM PLATED WITH SOLID FILM LUBRICANT ON NUT, LOCKING.
- W1835A3N = .1900-32 UNJF-3B THREAD CARBON STEEL NUT, CADMIUM PLATED, NON-LOCKING, AL ALLOY ANODIZED HOUSING.
- W1835C4S = .2500-28 UNJF-3B THREAD, CRES NUT AND HOUSING, PASSIVATED PER AMS2700, METHOD 1, TYPE 2, CLASS 4, SILVER PLATED NUT, LOCKING.
- W1835C4P = .2500-28 UNJF-3B THREAD, CRES NUT AND HOUSING, PASSIVATED PER AMS2700, METHOD 1, TYPE 2, CLASS 4, CADMIUM PLATED NUT, LOCKING.

W1835

CROSS REFERENCE

INSERT, MOLDED IN, BLIND THREADED, LOCKING, NONSELF-LOCKING, FLOATING, SANDWICH PANEL

| WITTEN | STANDARDS/OTHER | SHUR-LOK | THE YOUNG ENGINEERS | ALCOA/TRIDAIR |
|--------|-----------------|----------|---------------------|---------------|
| W1835 | NAS1835 SERIES | SL606 | TYE1835 | D1835 SERIES |

NOTES:

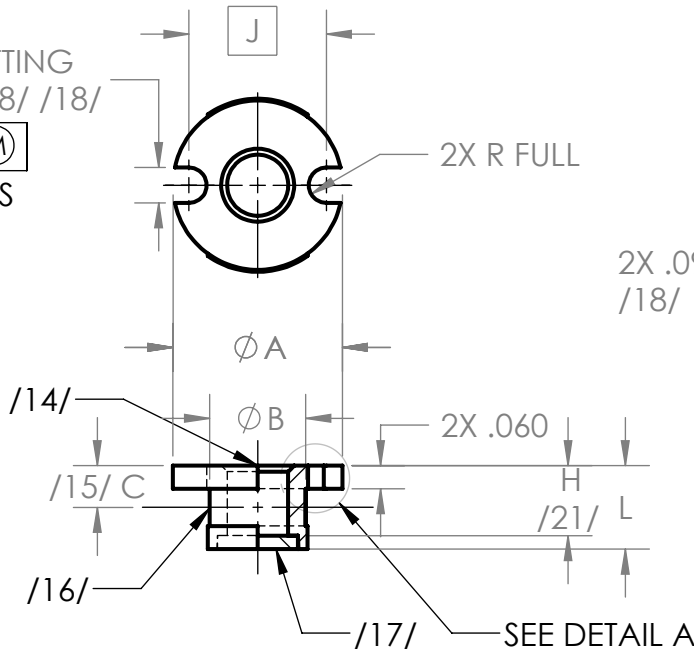
- /1/ THREADS PER AS8879.
- (2) LOCKING TORQUE PER NASM25027 EXCEPT LOCKING, CORROSION RESISTANT STEEL INSERT WITHOUT PLATING OR LUBRICANT WILL BE TESTED USING A SILVER PLATED BOLT OR SCREW.
- (3) TOLERANCES UNLESS OTHERWISE SPECIFIED: .XXX = ± 0.10 .XX = ± 0.02
- (4) AN ADHESIVE-BACKED INSTALLATION TAB NAS1837 (PLASTIC) SHALL BE FURNISHED WITH EACH INSERT.
- /5/ PLATING OR SOLID FILM LUBRICANT IS RECOMMENDED ON LOCKING CRES INSERTS.
- /6/ MINIMUM RADIAL FLOAT .032.
- /7/ MAXIMUM BOLT ENGAGEMENT SHOULD NOT EXCEED "L" MINUS .060.
- (8) NOT USED.
- /9/ BURRS AROUND POTTING HOLES OR SLOTS PERMISSABLE UNDER FLANGE.
- (10) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M -1982.
- (11) DIMENSIONS IN INCHES.
- /12/ MINIMUM "GO" THREAD GAGE PENETRATION SHALL BE ONE HALF REVOLUTION BEFORE LUBRICATION. MINIMUM BOLT THREAD PENETRATION SHALL BE THREE QUARTER REVOLUTION AFTER LUBRICATION.
- /13/ STRAIGHT OR DIAMOND ANTIROTATIONAL KNURL (MANUFACTURER'S OPTION).
- /14/ CENTERLINE OF THREAD LOCK WHEN APPLICABLE.
- /15/ SHANK DEFORMED IN THIS AREA TO PROVIDE THREAD LOCK WHEN APPLICABLE.
- /16/ POTTING AND VENT HOLES OR SLOTS (MANUFACTURER'S OPTION).
- (17) DIMENSIONAL LIMITS APPLY AFTER PLATING, AND PRIOR TO SOLID FILM LUBE.
- (18) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (19) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (20) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.

W1836



INSERT, MOLDED IN, BLIND THREADED, SELF-LOCKING, NONSELF-LOCKING, LIGHTWEIGHT, SANDWICH PANEL

2X .092 - .097 POTTING AND VENT SLOTS /8/ /18/


$\oplus \phi .020 \text{ (M)} \text{ A (M)}$
TYPICAL ALL STYLES




2X .092 - .097 /18/



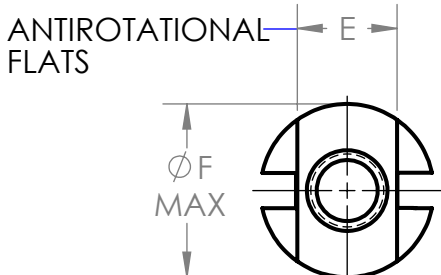
CONFIGURATION WITHIN THIS AREA MFG OPTION
DETAIL A
TYPICAL FOR ALL STYLES



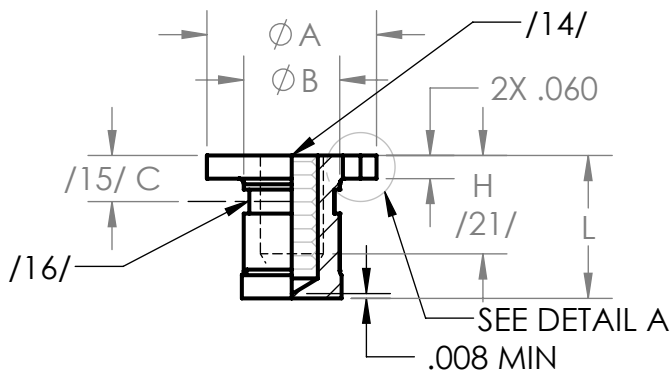SHIMMED STYLE FOR SHORT LENGTHS (MANUFACTURER'S OPTION)



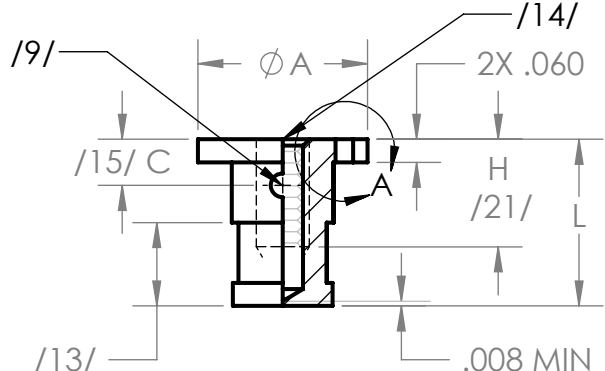BLIND TAPPED STYLE FOR LONG LENGTHS ALL STEEL AND CRES SELF-LOCKING AND NONSELF-LOCKING OR NONSELF-LOCKING ALUMINUM STYLE.



ALUMINUM SELF-LOCKING STYLE OR ALTERNATE NONSELF-LOCKING ALUMINUM STYLE

W1836

INSERT, MOLDED IN, BLIND THREADED, SELF-LOCKING, NONSELF-LOCKING, LIGHTWEIGHT, SANDWICH PANEL

TABLE I - IMPERIAL DIMENSIONS

| FIRST DASH NO. | THREAD CLASS 3B MINOR DIA -A- | ØA +.000 -.010 | ØB | C | E | ØF MAX | H /21/ | J BASIC | K MIN | L /22/ MIN | INSTALLATION HOLE SIZE |
|----------------|----------------------------------|----------------------|------|-----|------|-----------|-----------|------------|----------|------------------|------------------------|
| 04 | .1120-40 UNJC | .451 | .250 | .10 | .260 | .45 | .130 | .358 | .251 | .217 | .452 - .457 |
| 06 | .1380-32 UNJC | .451 | .250 | .12 | .260 | .45 | .187 | .358 | .251 | .217 | .452 - .457 |
| 08 | .1640-32 UNJC | .451 | .250 | .12 | .260 | .45 | .187 | .358 | .251 | .217 | .452 - .457 |
| 3 | .1900-32 UNJF | .451 | .250 | .12 | .260 | .45 | .187 | .358 | .251 | .217 | .452 - .457 |
| 4 | .2500-28 UNJF | .498 | .300 | .14 | .312 | .49 | .250 | .405 | .298 | .279 | .499 - .504 |

TABLE IA - METRIC DIMENSIONS

| FIRST DASH NO. | THREAD FED-STD-H28/21 | ØA +.000 -.010 | ØB | C | E | ØF MAX | H /21/ | J BASIC | K MIN | L /22/ MIN | INSTALLATION HOLE SIZE |
|----------------|-----------------------|----------------------|------|-----|-------|-----------|-----------|------------|----------|------------------|------------------------|
| M3 | M3X0.5-4H6H | 11.46 | 6.35 | 3.0 | 3.30 | 11.4 | 4.75 | 9.09 | 6.38 | 5.54 | 11.48-11.61 |
| M3.5 | M3.5X0.6-4H6H | 11.46 | 6.35 | 3.0 | 3.30 | 11.4 | 4.75 | 9.09 | 6.38 | 5.54 | 11.48-11.61 |
| M4 | M4X0.7-4H6H | 11.46 | 6.35 | 3.0 | 3.30 | 11.4 | 4.75 | 9.09 | 6.38 | 5.54 | 11.48-11.61 |
| M5 | M5X0.8-4H6H | 11.46 | 6.35 | 3.0 | 3.30 | 11.4 | 4.75 | 9.09 | 6.38 | 5.54 | 11.48-11.61 |
| M6 | M6X1-4H5H | 12.65 | 7.62 | 3.6 | 7.92 | 12.4 | 6.35 | 10.29 | 7.09 | 7.14 | 12.67-12.80 |
| M8 | M8X1.25-4H5H | 13.82 | 8.89 | 4.2 | 12.54 | 13.4 | 7.35 | 11.49 | 7.8 | 8.74 | 13.84-13.97 |

MATERIAL:

CARBON STEEL PER ASTM A108, ASTM A576 OR MATERIAL COMPOSITION PER AIR4127, ULTIMATE TENSILE STRENGTH , 85 KSI MINIMUM.
AL ALLOY, GRADE 2024 (UNS A92024) TEMPER T4 OR T351 PER AMS-QQ-A-225/6.
CRES 303 (UNS S30300) PER ASTM A582/A582M.
NONMETALLIC LOCKING ELEMENT - POLYAMIDE PER FED SPEC L-P-410.

FINISH:

CARBON STEEL - CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2.
AL ALLOY - ANODIZE PER MIL-PRF-8625, TYPE I, CLASS OPTIONAL.
CRES - PASSIVATE PER ASTM-A967; SILVER PLATE PER AMS 2410 OR AMS 2411; OR CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2.

LUBRICATION:

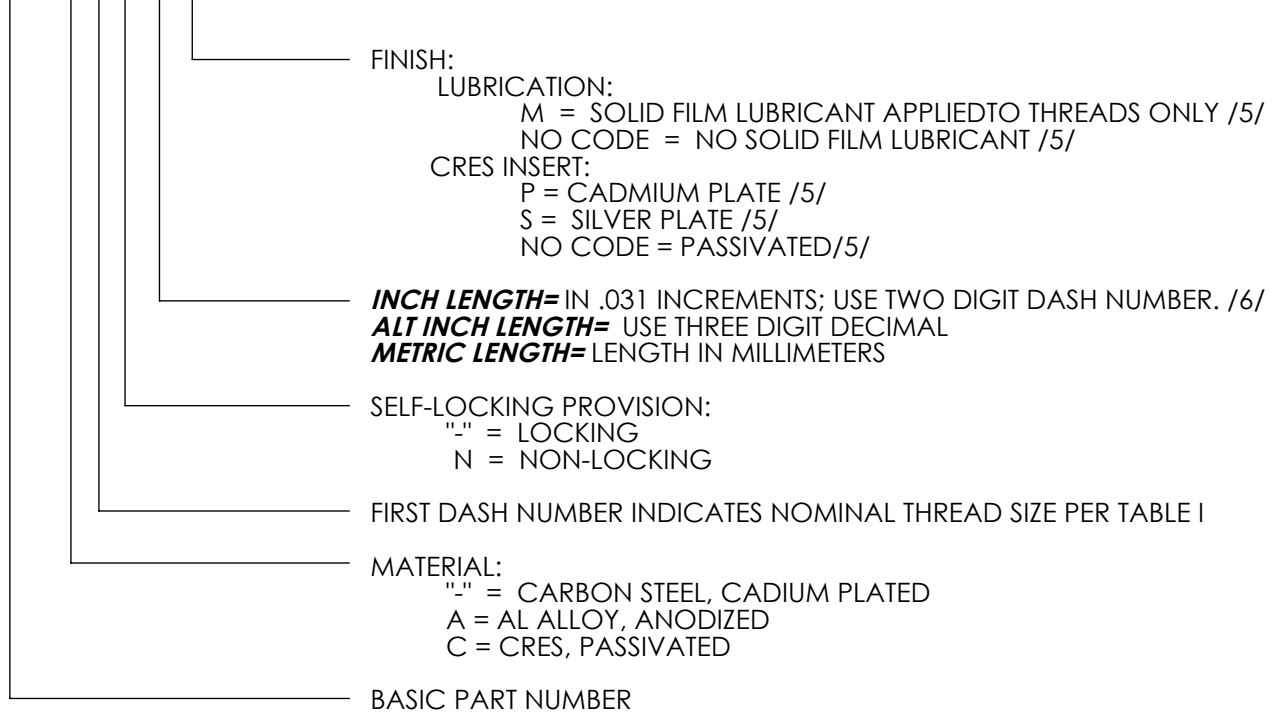
SOLID FILM LUBRICANT PER AS5272, TYPE I, APPLIED TO THREADS ONLY.

W1836

INSERT, MOLDED IN, BLIND THREADED, SELF-LOCKING, NONSELF-LOCKING, LIGHTWEIGHT, SANDWICH PANEL

CODE:

W1836 - 3 - 08 M


EXAMPLE OF PART NUMBER:

W1836-3-08M = .1900-32 UNJF-3B THREAD, CARBON STEEL,
 CADMIUM PLATED, WITH SOLID FILM LUBRICANT, .248" LONG, SELF-LOCKING.
 W1836A3N09 = .1900-32 UNJF-3B THREAD, AL ALLOY, ANODIZED, .279" LONG, NONSELF-LOCKING.
 W1836C08-10S = .1640-32 UNJC-3B THREAD, CRES, SILVER PLATED, .310" LONG, SELF-LOCKING.
 W1836C08-10P = .1640-32 UNJC-3B THREAD, CRES, CADMIUM PLATED, .310" LONG, SELF-LOCKING.
 W1836C4N12 = .2500-28 UNJF-3B THREAD, CRES, PASSIVATED, .372" LONG, NONSELF-LOCKING.
 W1836CM6N25.4 = M6X1 4H5H THREAD, CRES PASSIVATED, 25.4 MM LONG, NONSELF-LOCKING.

NOTE:

- (1) INCH THREADS PER AS8879, CLASS 3B. METRIC THREAD PER FED-STD-H28/21.
- (2) NOT USED
- (3) TOLERANCES UNLESS OTHERWISE SPECIFIED: .XXX ±.010, .XX ±.02.

W1836

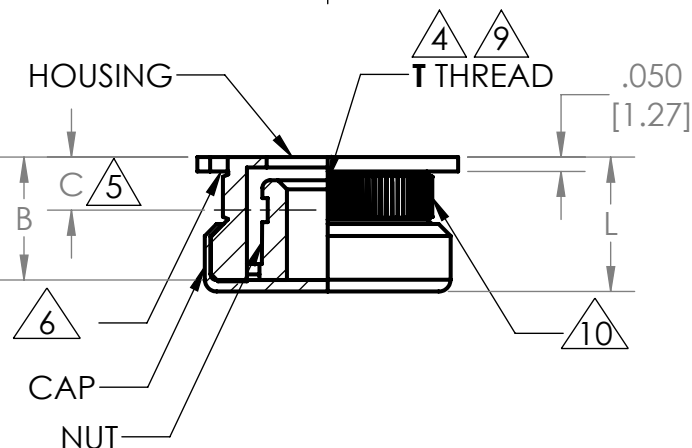
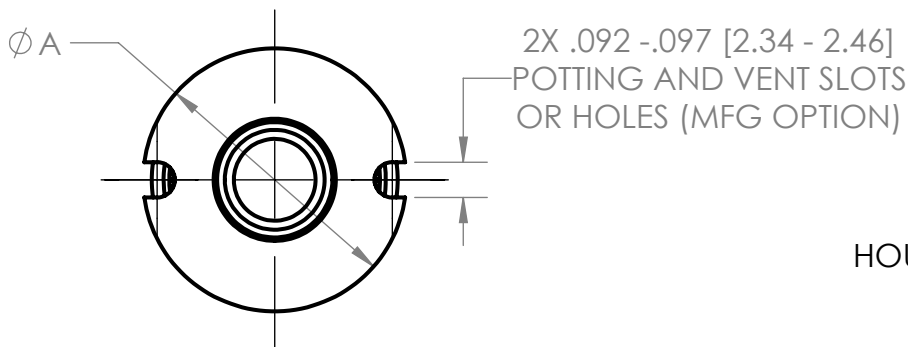
INSERT, MOLDED IN, BLIND THREADED, SELF-LOCKING, NONSELF-LOCKING, LIGHTWEIGHT, SANDWICH PANEL

NOTE:


- (4) AN ADHESIVE-BACKED INSTALLATION TAB (PLASTIC) SHALL BE FURNISHED WITH EACH INSERT.
- /5/ PLATING OR SOLID FILM LUBRICANT IS RECOMMENDED ON SELF-LOCKING CRES INSERTS.
- /6/ SELECT A LENGTH WHICH WILL ALLOW A MINIMUM OF .040 CLEARANCE BETWEEN BOTTOM OF INSERT AND INSIDE SURFACE OF BOTTOM SKIN.
- (7) MAXIMUM BOLT ENGAGEMENT SHOULD NOT EXCEED "L" MINUS .060.
- /8/ BURRS CAUSED BY MACHINING POTTING HOLES OR SLOTS PERMISSIBLE UNDER FLANGE.
- /9/ NONMETALLIC THREAD LOCK WHEN APPLICABLE. LOCATE PELLETT NO CLOSER THAN 10° FROM EDGE OF EITHER POTTING HOLE OR SLOT.
- (10) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.
- (11) DIMENSIONS IN INCHES AND APPLY AFTER FINISH AND PRIOR TO THE APPLICATION OF LUBRICATION UNLESS OTHERWISE SPECIFIED.
- (12) NOT USED.
- /13/ EXTERNAL CONFIGURATION OPTIONAL IN THIS AREA FOR SHORT LENGTHS THROUGH .375.
- /14/ MINIMUM "GO" THREAD GAGE PENETRATION SHALL BE ONE HALF REVOLUTION BEFORE LUBRICATION. MINIMUM BOLT THREAD PENETRATION SHALL BE THREE QUARTER REVOLUTION AFTER LUBRICATION.
- /15/ CENTERLINE OF THREAD LOCK WHEN APPLICABLE.
- /16/ SHANK DEFORMED IN THIS AREA TO PROVIDE THREAD LOCK WHEN APPLICABLE.
- /17/ SHIM TO PROVIDE MAXIMUM THREAD ON SHORT LENGTH INSERT IF NECESSARY.
- /18/ POTTING AND VENT HOLES OR SLOTS (MANUFACTURER'S OPTION).
- (19) ALL DIAMETERS SHALL BE WITHIN .010 CIRCULAR RUNOUT TO DATUM A.
- (20) REMOVE ALL BURRS AND SHARP EDGES.
- /21/ MINIMUM THREAD "H" IN SHORT LENGTHS. MINIMUM THREAD "H" WHERE LENGTH PERMITS SHALL BE 2X DIAMETER OF THREAD.
- /22/ MINIMUM LENGTH WHICH MAY BE SPECIFIED.
- /23/ NOT USED.
- (24) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (25) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (26) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.

W2334

INSERT, MOLDED IN, BLIND THREADED, LOCKING, NONSELF-LOCKING, FLOATING, SANDWICH PANEL



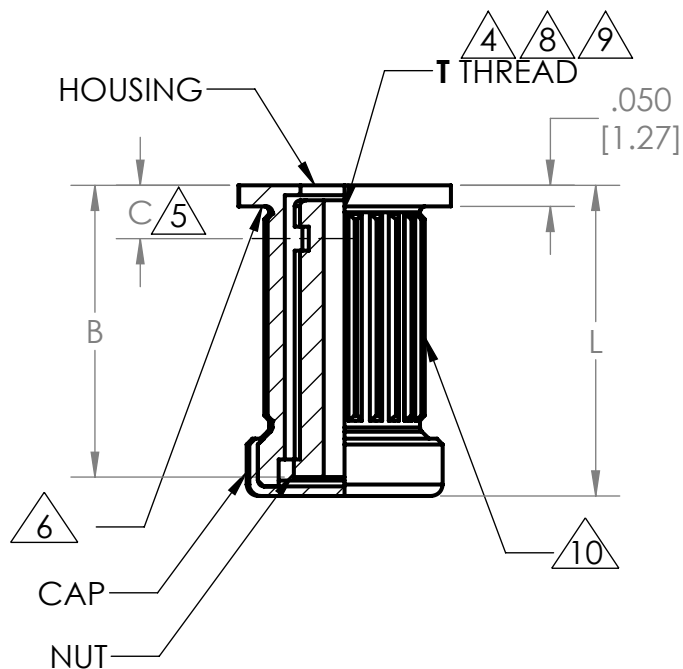STANDARD MANUFACTURING CONFIGURATION FOR -3 AND SHORTER




OPTIONAL MANUFACTURING CONFIGURATION FOR -4 LENGTHS AND LONGER

EXAMPLE OF PART CODING:

W2334 - 3 A 3 M SP5 N (INCH)

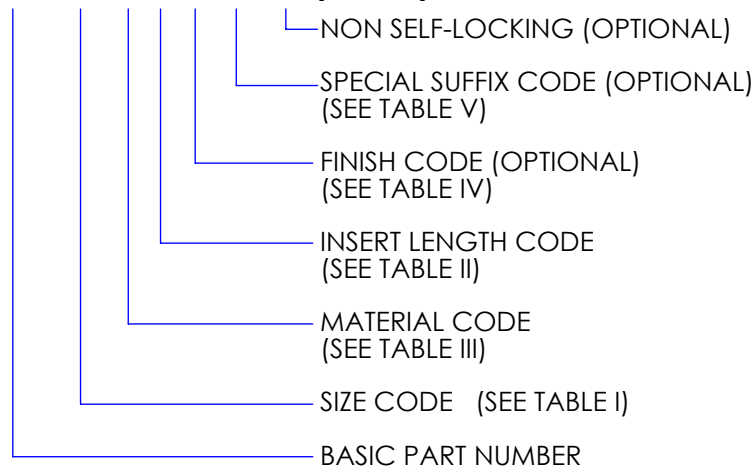W2334 M5 A 3 M SP5 N [METRIC]



NOTES:

1. INSTALLATION TAB FURNISHED WITH EACH INSERT.
2. DELETED.
3. DELETED.
- [4] INCH THREAD PER AS8879. METRIC THREAD PER MA1370 OR ISO5855. FUNCTIONAL MINOR DIAMETER IS ACCEPTABLE.
- [5] LOCKING TORQUE. INCH THREAD PER NASM25027. METRIC THREAD PER NA0009. SELF-LOCKING CORROSION RESISTANT STEEL INSERT WITHOUT PLATING OR LUBRICANT SHALL BE TESTED WITH SILVER PLATED BOLT OR SCREW.
- [6] BURRS PERMISSIBLE UNDER POTTING HOLES OR SLOTS AS LONG AS HOLES OR SLOTS ARE NOT RESTRICTED.

APPLICATION

AN EPOXY POTTED-IN INSERT FOR PANEL ATTACHMENTS WHERE BOLT HOLE MISALIGNMENT REQUIRES A FLOATING NUT ELEMENT.

WITTEN COMPANY
918-272-9567

APPROVAL DATE: 02/10/2022

CAGE CODE: 0JHK5

W2334

INSERT, MOLDED IN, BLIND THREADED, LOCKING, NONSELF-LOCKING, FLOATING, SANDWICH PANEL

TABLE I - SIZE CODE

| SIZE CODE | T THREAD | A +.000 -.010 +[0.00] -[0.25] | C REF | INSTALLATION HOLE SIZE |
|-----------|------------------|---|--------------|----------------------------------|
| | △4 | | | △5 |
| 04 | .1120-40 UNJC-3B | .561 [14.25] | .14 [3.6] | .562 - .565 [14.27] - [14.35] |
| 06 | .1380-32 UNJC-3B | .561 [14.25] | .14 [3.6] | .562 - .565 [14.27] - [14.35] |
| M3 | M3 X 0.5-4H6H | | | |
| 08 | .1640-32 UNJC-3B | .561 [14.25] | .16 [4.1] | .562 - .565 [14.27] - [14.35] |
| M4 | M4 X 0.7-4H6H | | | |
| 3 | .1900-32 UNJF-3B | .561 [14.25] | .16 [4.1] | .562 - .565 [14.27] - [14.35] |
| M5 | M5 X 0.8-4H6H | | | |
| 4 | .2500-28 UNJF-3B | .686 [17.40] | .18 [4.6] | .687 - .690 [14.27] - [14.35] |
| M6 | M6 X 1-4H5H | | | |
| 5 | .3125-24 UNJF-3B | .811 [20.60] | .20 [5.1] | .812 - .815 [20.62] - [20.70] |
| M8 | M8 X 1.25-4H5H | | | |
| 6 | .3750-24 UNJF-3B | .937 [23.80] | .22 [5.6] | .937 - .940 [23.80] - [23.88] |
| M10 | M10 X 1.5-4H5H | | | |

NOTES CONTINUED:

7. INSERT NUT MINIMUM RADIAL FLOAT INSIDE THE HOUSING IS .032 [0.81].

△8 THREAD MAY NOT BE THROUGH ON -4 LENGTHS AND LONGER. (MANUFACTURES OPTION).

△9 MINIMUM "GO" THREAD GAGE PENETRATION SHALL BE ONE HALF REVOLUTION BEFORE LUBRICATION. MINIMUM BOLT THREAD PENETRATION SHALL BE THREE QUARTER REVOLUTION AFTER LUBRICATION.

△10 STRAIGHT OR DIAMOND ANTIROTATIONAL KNURL (WITTEN OPTION).

△11 LIGHT WEIGHT INSERT FOR SIZE CODE 3 (.1900-32 THREAD), MATERIAL CODE "A" AND INSERT LENGTH CODE 1,2, AND 3.

△11

TABLE II - INSERT LENGTH CODE

| INSERT LENGTH CODE | L MAX | B MAXIMUM RECOMMENDED BOLT ENGAGEMENT LENGTH | | | | | | | | | | | | | |
|--------------------|------------------|--|----------------|----------------|----------------|----------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--|
| | | SIZE CODE | | | | | | | | | | | | | |
| | | 04 | 06 | M3 | 08 | M4 | 3 | M5 | 4 | M6 | 5 | M8 | 6 | M10 | |
| 1 | .310 [7.87] | .250 [6.35] | .250 [6.35] | .250 [6.35] | .250 [6.35] | .250 [6.35] | .250 [6.35] | .250 [6.35] | | | | | | | |
| 2 | .350 [8.89] | .250 [6.35] | .281 [7.14] | .281 [7.14] | .281 [7.14] | .281 [7.14] | .281 [7.14] | .281 [7.14] | .281 [7.14] | .281 [7.14] | .281 [7.14] | .281 [7.14] | .281 [7.14] | .281 [7.14] | |
| 3 | .375 [9.52] | .250 [6.35] | .281 [7.14] | .281 [7.14] | .281 [7.14] | .312 [7.92] | .312 [7.92] | .312 [7.92] | .312 [7.92] | .312 [7.92] | .312 [7.92] | .312 [7.92] | .312 [7.92] | .312 [7.92] | |
| 4 | .455 [11.56] | .250 [6.35] | .281 [7.14] | .312 [7.92] | .312 [7.92] | .312 [7.92] | .312 [7.92] | .312 [7.92] | .312 [7.92] | .312 [7.92] | .312 [7.92] | .312 [7.92] | .312 [7.92] | .312 [7.92] | |
| 5 | .565 [14.35] | .250 [6.35] | .281 [7.14] | .312 [7.92] | .312 [7.92] | .375 [9.52] | .375 [9.52] | .437 [11.10] | .437 [11.10] | .437 [11.10] | .437 [11.10] | .437 [11.10] | .437 [11.10] | .437 [11.10] | |
| 6 | .690 [17.53] | .250 [6.35] | .281 [7.14] | .312 [7.92] | .312 [7.92] | .375 [9.52] | .375 [9.52] | .500 [12.70] | .500 [12.70] | .532 [13.51] | .532 [13.51] | .532 [13.51] | .532 [13.51] | .532 [13.51] | |
| 7 | .815 [20.70] | .250 [6.35] | .281 [7.14] | .312 [7.92] | .312 [7.92] | .375 [9.52] | .375 [9.52] | .500 [12.70] | .500 [12.70] | .625 [15.88] | .625 [15.88] | .625 [15.88] | .625 [15.88] | .625 [15.88] | |
| 8 | .935 [23.75] | .250 [6.35] | .281 [7.14] | .312 [7.92] | .312 [7.92] | .375 [9.52] | .375 [9.52] | .500 [12.70] | .500 [12.70] | .625 [15.88] | .625 [15.88] | .625 [15.88] | .625 [15.88] | .625 [15.88] | |
| 9 | 1.060 [26.92] | .250 [6.35] | .281 [7.14] | .312 [7.92] | .312 [7.92] | .375 [9.52] | .375 [9.52] | .500 [12.70] | .500 [12.70] | .625 [15.88] | .625 [15.88] | .625 [15.88] | .625 [15.88] | .625 [15.88] | |
| 10 | 1.185 [30.10] | .250 [6.35] | .281 [7.14] | .312 [7.92] | .312 [7.92] | .375 [9.52] | .375 [9.52] | .500 [12.70] | .500 [12.70] | .625 [15.88] | .625 [15.88] | .625 [15.88] | .625 [15.88] | .625 [15.88] | |

△11
△11
△11

W2334

INSERT, MOLDED IN, BLIND THREADED, LOCKING, NONSELF-LOCKING, FLOATING, SANDWICH PANEL

TABLE III - MATERIAL CODE



| MATL CODE | ITEM, MATERIAL, AND STANDARD FINISH | | |
|-----------|--|---|--|
| | NUT | HOUSING | CAP |
| A | CARBON OR ALLOY STEEL ULTIMATE STRENGTH 85 KSI MIN. CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2 | AL ALLOY 2024-T4. ANODIZE PER AMS-A-8625 TYPE I OR CHEM-FILM PER AMS-C-5541 | AL ALLOY 6061-O, FINISH CHEM FILM PER MIL-DTL-5541. CLASS 1A OR CLASS 3. |
| B | CARBON OR ALLOY STEEL ULTIMATE STRENGTH 85 KSI MIN. CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2 | CARBON OR ALLOY STEEL CAD PLATE PER SAE-AMS-QQ-P-416, TYPE II, CLASS 2 | AL ALLOY 6061-O, FINISH CHEM FILM PER MIL-DTL-5541. CLASS 1A OR CLASS 3. |
| C | CRES 303 PASSIVATE PER ASTM-A967 | CRES 303 PASSIVATE PER ASTM-A967 | |
| D | CRES 303 PASSIVATE PER ASTM-A967 | AL ALLOY 2024-T4. ANODIZE PER AMS-A-8625 TYPE I OR CHEM-FILM PER AMS-C-5541 | |
| G | CARBON OR ALLOY STEEL ULTIMATE STRENGTH 85 KSI MIN. CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2 | CRES 303 PASSIVATE PER ASTM-A967 | |

TABLE IV - FINISH CODE OPTIONAL


| FINISH CODE | OPTIONAL SPECIAL FINISH |
|-------------|---|
| M | SOLID FILM LUBRICANT PER AS5272, TYPE I, NUT ONLY |
| C | CAD PLATE PER AMS-QQ-P-416 TYPE II, CLASS 2 ON CRES NUT ONLY. |
| S | SILVER PLATE PER AMS2410, NUT ONLY |

TABLE V - SPECIAL SUFFIX CODE OPTIONAL

| SPECIAL SUFFIX CODE | SPECIAL SUFFIX DEFINITION |
|---------------------|---|
| SP5 | NON-LOCKING NUT THREAD |
| SP16 | SILVER PLATE 303 CRES HOUSING (ONLY) PER AMS2410 OR AMS2411 (APPLIES TO ASSY MATL CODES 'C' AND 'G' ONLY) |

| DATE | SYM | REVISION RECORD | DR | CHK | APP |
|------------|-----|------------------------------------|----|-----|-----|
| 11/12/2025 | A | ADDED W1832, 181, W1836, 180 & 130 | KL | DW | DW |
| | | | | | |
| | | | | | |

| DASH NO. | NAS1837 REF DASH NO. | INSERT FIRST DASH NO. | (J) | (Ø A) | (B) | (C) |
|--|----------------------|-----------------------|------|-------|-----|------|
| FOR NAS1832, NAS1833 AND NAS1834, W1832, 181 | | | | | | |
| -367 | T3 | -06 | .367 | .90 | .33 | 1.14 |
| -367 | T3 | -08 | .367 | .90 | .33 | 1.14 |
| -367 | T3 | -3 | .367 | .90 | .33 | 1.14 |
| -467 | T6 | -4 | .467 | .90 | .37 | 1.14 |
| -467 | T6 | -5 | .467 | .90 | .37 | 1.14 |
| -591 | T9 | -6 | .591 | 1.13 | .54 | 1.42 |
| FOR NAS1835 | | | | | | |
| -500 | T7 | -08 | .500 | .90 | .37 | 1.14 |
| -500 | T7 | -3 | .500 | .90 | .37 | 1.14 |
| -591 | T9 | -4 | .591 | 1.13 | .54 | 1.42 |
| -655 | T10 | -5 | .655 | 1.13 | .54 | 1.42 |
| -718 | T11 | -6 | .718 | 1.13 | .54 | 1.42 |
| FOR NAS1836, W1836 | | | | | | |
| -358 | T2 | -06 | .358 | .90 | .33 | 1.14 |
| -358 | T2 | -08 | .358 | .90 | .33 | 1.14 |
| -358 | T2 | -3 | .358 | .90 | .33 | 1.14 |
| -405 | T4 | -4 | .405 | .90 | .33 | 1.14 |
| FOR 180, 130 | | | | | | |
| -367 | T3 | -632 | .367 | .90 | .33 | 1.14 |
| -367 | T3 | -832 | .367 | .90 | .33 | 1.14 |
| -367 | T3 | -1024/-1032 | .367 | .90 | .33 | 1.14 |
| -467 | T6 | -420/-428 | .467 | .90 | .37 | 1.14 |
| -467 | T6 | -518/-524 | .467 | .90 | .37 | 1.14 |
| -591 | T9 | -616/-624 | .591 | 1.13 | .54 | 1.42 |

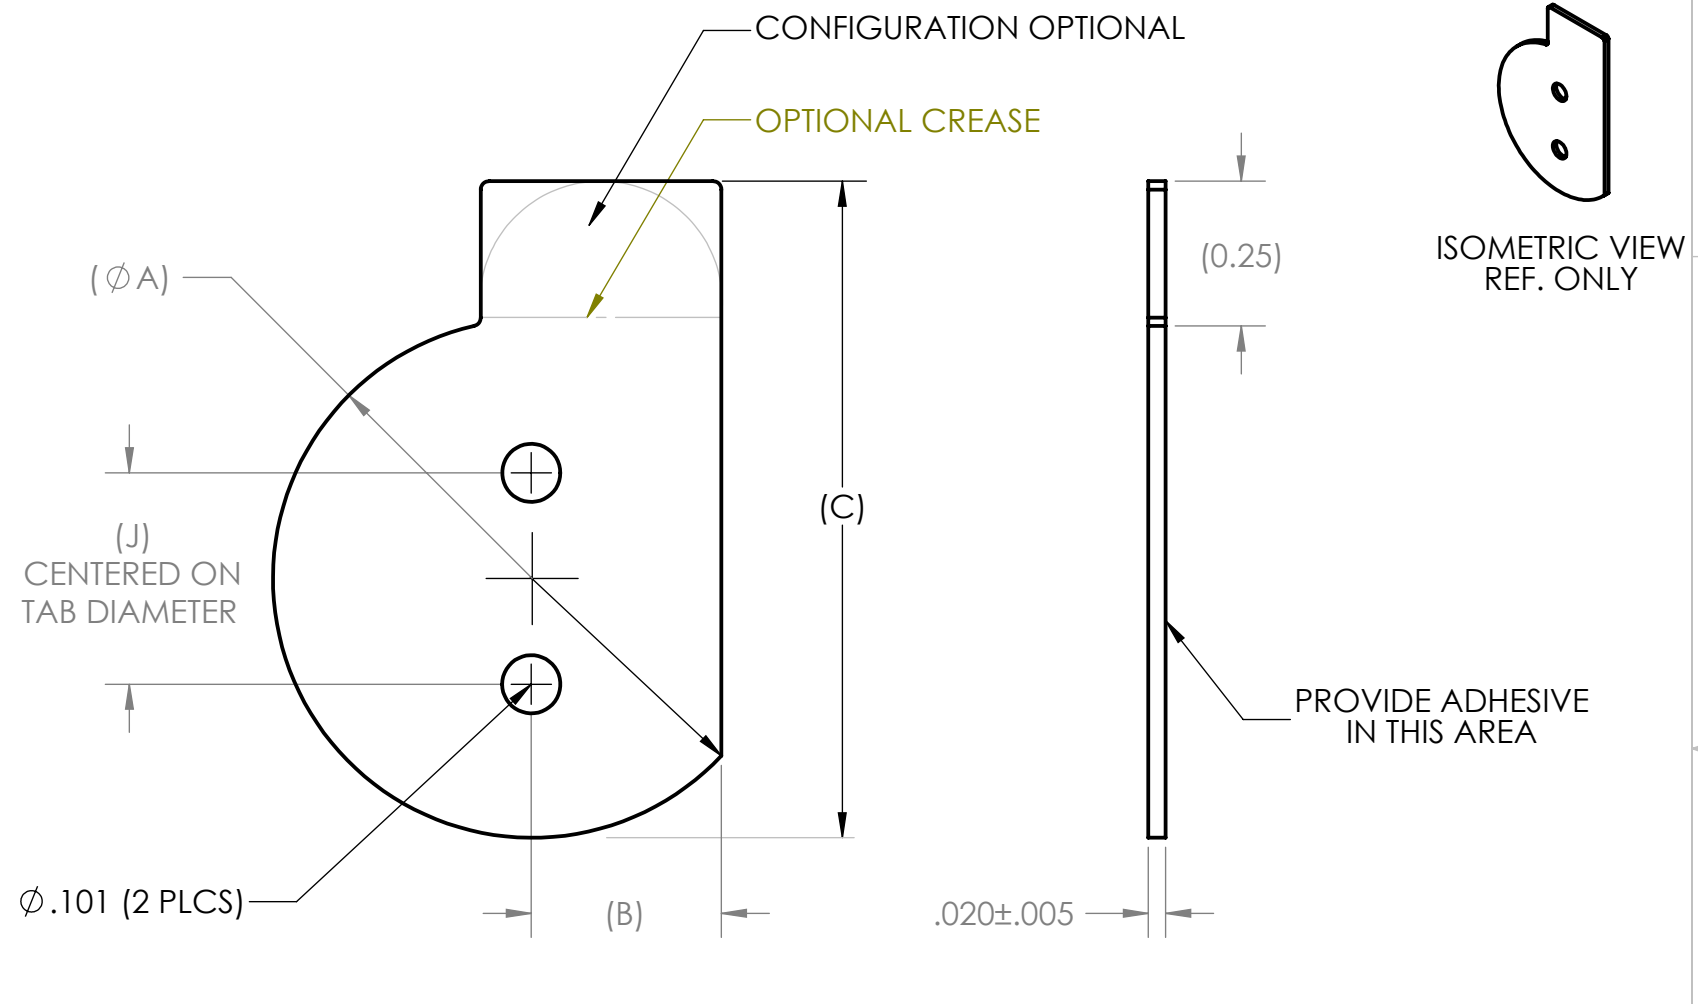

PLASTIC INSTALLATION TAB

10. -367 WAS PREVIOUSLY -23 TAB.
9. REMOVE ALL BURRS AND BREAK SHARP EDGES.
8. ALL FILLET RADII R. .015 MAX.
7. DIMENSION AND TOLERANCING PER ANSI Y14.5M-1982.
6. CONFIGURATION AND ORIENTATION OF THE LIFTING SECTION OPTIONAL.
5. ADHESIVE UNDER BREAKAWAY SEGMENT PERMISSIBLE BUT NOT REQUIRED.
4. INSTALLATION TABS ARE FURNISHED WITH INSERTS AS SPECIFIED ON THE APPLICABLE STANDARD.
3. PART NUMBER EXAMPLE: 2007-500, DESIGNATES T7 INSTALLATION TAB FOR NAS1835 INSERT IN SIZE "08" AND "3".
2. FINISH: NONE SPECIFIED.
1. MATERIAL: POLYCARBONATE SHEET PER ASTM D3935 OR L-P-535, COMPOSITION A OR B TYPE II CLASS OPTIONAL, WITH 3M ADHESIVE.

NOTES:

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WITTEN COMPANY INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF WITTEN COMPANY INC. IS PROHIBITED.

| | | | |
|--|------------------------|------------|-----------|
| UNLESS OTHERWISE SPECIFIED: | CAGE: 0JHK5 | NAME | DATE |
| DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL $\pm 1/16$ ANGULAR: MACH ± 2 DEG TWO PLACE DECIMAL $\pm .02$ THREE PLACE DECIMAL $\pm .010$ SURFACE FINISH 125 RMS | DRAWN | J.HERRIMAN | 7/27/2015 |
| | CHECKED | D.WITTEN | 7/27/2015 |
| | ENG APP | D.WITTEN | 7/27/2015 |
| INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M - 1994 | COMMENTS: | | |
| DO NOT SCALE DRAWING | THIRD ANGLE PROJECTION | | |

TECH DATA SHEET



| | | | |
|-------------|----------|-----------------------------------|--|
| TITLE: | | NAS TYPE PLASTIC INSTALLATION TAB | |
| SIZE | DWG. NO. | REV | |
| B | 2007 | A | |
| SCALE: NONE | | SHEET 1 OF 1 | |

▶ 120 AND 121 SERIES INSERTS, POTTED-IN METHOD

1. Degrease Inserts using acetone or M.E.K prior to installation to assure proper adhesion.
2. Drill recommended installation hole.
3. Clean core and panel skin residue from installation hole by vacuum or other appropriate means.
4. Prepare potting compound for use in accordance with manufacturer's Instructions.
5. Fill Sealant gun cartridge with potting compound.
6. Partially prepot (approximately 2/3 full) by injecting the potting compound into the installation hole. Do not completely fill the hole.
7. Coat the entire surface of the insert with potting compound.
8. Place the insert into the installation hole by applying sufficient mechanical pressure to provide a flush mount for the 120 series and flange protrusion for the 121 series.
9. Clean excess potting compound from the insert area.
10. Allow the potting compound to cure in accordance with the manufacturer's recommendations.

▶ 130, 140, 141, 150, 151, 155, 156, 2253, NAS1832, NAS1835 AND NAS1836 INSERTS, POTTED-IN METHOD FOR SOLID LAMINATE MATERIALS

1. Degrease Inserts using acetone or M.E.K prior to installation to assure proper adhesion.
2. Drill recommended installation hole. The depth of the hole should be a minimum of .030 deeper than the length of the part.
3. Clean residue from installation hole by vacuum or other appropriate means.
4. Prepare potting compound for use in accordance with manufacturer's Instructions.
5. Fill Sealant gun cartridge with potting compound.
6. Partially prepot (approximately 2/3 full) by injecting the potting compound into the installation hole. Do not completely fill the hole.
7. Place the insert into the installation hole. For 130, 140, 150, 155, NAS1832, NAS1835 and NAS1836 series inserts, use the installation tabs provided to hold the insert in position. Peel off the tab backing and place onto inserts while aligning the holes with the holes or slots of the insert. For 141, 151, 156 and 2253 series, snap-in the insert to retain it in position.
8. Inject the potting compound through on the potting holes until the potting compound flows from the other hole.
9. Clean excess potting compound from the insert area.
10. Allow the potting compound to cure in accordance with the manufacturer's recommendations.
11. After potting compound is cured, remove the installation tabs from the 130, 140, 150, 155, NAS1832, NAS1835 and NAS1836 series inserts.

▶ **130, 140, 141, 150, 151, 155, 156, 2253, NAS1832, NAS1835 AND NAS1836 INSERTS, POTTED-IN METHOD FOR CORE TYPE MATERIALS**

1. Degrease Inserts using acetone or M.E.K prior to installation to assure proper adhesion.
2. Drill recommended installation hole. The depth of the hole should be a minimum of .030 deeper than the length of the part.
3. Undercut the core around the hole approximately .50 inch larger in diameter than the diameter of the installation hole in the panel skin.
4. Clean core and panel skin residue from installation hole by vacuum or other appropriate means.
5. Prepare potting compound for use in accordance with manufacturer's instructions.
6. Fill sealant gun cartridge with potting compound.
7. Partially prepot (approximately 2/3 full) by injecting the potting compound in the installation hole. Do not completely fill the hole.
8. Place the insert into the installation hole. For 130, 140, 150, 155, NAS1832, NAS1835 and NAS1836 series inserts, use the installation tabs provided to hold the insert in position. Peel of the tab backing and place onto insert while aligning holes with the holes or slots in the insert. For 141, 151, 156 and 2253 series, snap-in the insert to retain it in position.
9. Inject the potting compound through one of the potting holes until the potting compound flows from the other hole.
10. Clean excess potting compound from the insert area.
11. Allow the potting compound to cure in accordance with the manufacturer's recommendations.
12. After potting compound is cured, remove the installation tabs from the 130, 140, 150, 155, NAS1832, NAS1835 and NAS1836 series inserts.



352, 354, AND 355 SERIES INSERTS, POTTED-IN METHOD FOR CORE TYPE MATERIALS

1. Degrease Inserts using acetone or M.E.K prior to installation to assure proper adhesion.
2. Drill recommended installation hole.
3. Clean core and panel skin residue from installation hole by vacuum or other appropriate means.
4. Prepare potting compound for use in accordance with manufacturer's Instructions.
5. Fill Sealant gun cartridge with potting compound.
6. Coat the entire surface of the insert with potting compound.
7. Place the insert into the installation hole by applying sufficient mechanical pressure to position the insert.
8. Inject potting compound same as 181.
9. Clean excess potting compound from the insert area.
10. Allow the potting compound to cure in accordance with the manufacturer's recommendations.



352, 354, AND 355 SERIES INSERTS, POTTED-IN METHOD FOR SOLID LAMINATE MATERIALS

1. Degrease Inserts using acetone or M.E.K prior to installation to assure proper adhesion.
2. Drill recommended installation hole.
3. Clean core and panel skin residue from installation hole by vacuum or other appropriate means.
4. Prepare potting compound for use in accordance with manufacturer's Instructions.
5. Fill Sealant gun cartridge with potting compound.
6. Coat the entire surface of the insert with potting compound.
7. Place the insert into the installation hole by applying sufficient mechanical pressure to position the insert.
8. Clean excess potting compound from the insert area.
9. Allow the potting compound to cure in accordance with the manufacturer's recommendations.



180, 181, NASI833 AND NASI834 SERIES INSERTS, POTTED -IN METHOD FOR SOLID LAMINATE MATERIALS

1. Degrease Inserts using acetone or M.E.K prior to installation to assure proper adhesion.
2. Drill recommended installation hole thru the panel.
3. Clean residue from installation hole by vacuum or other appropriate means.
4. Prepare potting compound for use in accordance with manufacturer's instructions.
5. Fill Sealant gun cartridge with potting compound.
6. Place the insert into the installation hole using the installation tabs provided to hold the insert in position. Peel off the tab backing and place onto inserts while aligning the holes with the holes or slots of the insert. Masking tape may be placed over the underside of the insert to avoid adhesive leakage.
7. Inject the potting compound through on the potting holes until the potting compound flows from the other hole.
8. Clean excess potting compound from the insert area.
9. Allow the potting compound to cure in accordance with the manufacturer's recommendations.
10. After potting compound is cured, remove the installation tabs from the inserts.



180, 181, NASI833 and NASI834 SERIES INSERTS, POTTED-IN METHOD FOR CORE TYPE MATERIALS

1. Degrease Inserts using acetone or M.E.K prior to installation to assure proper adhesion.
2. Drill recommended installation hole thru the panel.
3. Undercut the core around the hole approximately 1.00 inch larger in diameter than the diameter of the installation hole in the panel skin.
4. Clean core and panel skin residue from installation hole by vacuum or other appropriate means.
5. Prepare potting compound for use in accordance with manufacturer's instructions.
6. Fill sealant gun cartridge with potting compound.
7. Place the insert into the installation hole using the installation tabs provided to hold the insert in position. Peel of the tab backing and place onto insert while aligning holes with the holes or slots in the insert. Masking tape may be placed over the under side of the insert to avoid adhesive leakage.
8. Inject the potting compound through one of the potting holes until the potting compound flows from the other hole.
9. Clean excess potting compound from the insert area.
11. Allow the potting compound to cure in accordance with the manufacturer's recommendations.
12. After potting compound is cured, remove the installation tabs from the inserts.

▶ 2235 SERIES INSERTS, POTTED RIVET NUT

1. Degrease Inserts using acetone or M.E.K prior to installation to assure proper adhesion.
2. Drill recommended installation hole. The depth should be a minimum of .030 deeper than length of part.
3. Clean residue from installation hole by vacuum or other appropriate means.
4. Prepare potting compound for use in accordance with manufacturer's instructions.
5. Fill sealant gun cartridge with potting compound.
6. Partially prepot (approximately 2/3 full) by injecting the potting compound in the installation hole. Do not completely fill the hole.
7. The fastener is threaded onto the pull-up stud of an installation tool.
8. The fastener , on the pull-up stud, is inserted into the drilled or punched hole.
9. The pull-up stud retracts and bulges the unthreaded portion of the fastener shank against the flat undersurface.
10. The installation tool stud is removed, leaving the fastener secure and ready for the attachment screw.
11. Clean excess potting compound from the insert area.
12. Allow the potting compound to cure in accordance with thte manufacturer's recommendations.



2445 SERIES INSERTS FOR METALLIC FACE SHEETS THREADED AND NON-THREADED

1. **PANEL PREPARATION;**

THE WITTEN Co. 2445 SERIES INSERT REQUIRES ONLY A SINGLE DIAMETER HOLE DRILLED THROUGH THE ENTIRE PANEL. THE DIAMETER OF THIS HOLE IS COMPARABLE TO THE BODY DIAMETER OF THE FASTENER.

2. **FASTENER INSTALLATION;**

THERE ARE SEVERAL METHODS OF APPLYING THE NECESSARY PRESSURE TO COMPLETE THE INSTALLATION. THE MOST COMMON IS THE USE OF A SUPPORT BASE AND PNEUMATIC OR HYDRAULIC PUNCH APPLYING PRESSURE TO THE HEAD OF THE FASTENER ONLY. ALIGNMENT TOOLS CAN BE MANUFACTURED TO SUIT INSTALLATION EQUIPMENT.

3. **COMPLETED INSTALLATION;**

PERMANENTLY INSTALLED AT SUB-ASSEMBLY. THE 2445 SERIES FASTENERS ARE SELF-RETAINED THROUGH A TELESCOPIC PRESS FIT. A FUNCTION OF THE SLEEVE AND PLUG SECTIONS.

WHEN EXTREMELY HEAVY SHEETS ARE EMPLOYED, THE SPRING BACK MAY FORCE THE HEAD OF THE FASTENER SLIGHTLY ABOVE A FLUSH CONDITION. HOWEVER, WHEN THE COMPONENT IS BOLTED DOWN TO THE PANEL, THE FASTENER WILL AGAIN BECOME FLUSH WITH THE COVER SHEET SURFACE.

WITTEN FASTENERS

SUBJECT: POTTING COMPOUNDS (ADHESIVES)

FOR INSTALLATION OF POTTED INSERTS INTO COMPOSITE PANELS

USE HAND HELD GUNS OR PNEUMATIC DISPENSING GUNS FOR INSTALLATION OF FASTENERS AND INSERTS

DESCRIPTION

MANUFACTURER

Two part epoxy adhesive,
room temperature cure.

H.B. Fuller Co.
3530 N. Lexington Ave.
St. Paul, MN 55126
(651)236-3000
www.hbfuller.com

Two part epoxy adhesive,
room temperature cure.

Huntsman Advanced Materials
10003 Woodland Forest Drive
The Woodlands, TX 77381
(800)817-8260
www.huntman.com

Two part epoxy adhesive,
room temperature cure.

Henkel Corporation Aerospace Group
2850 Willow Pass Road
Bay Point, CA 94565-0031
Tel: (925)458-8000
Fax: (925)458-8030
www.hysol.com

Two part epoxy adhesive
room temperature cure

ITW Devcon
30 Endicoot Street
Danvers, MA 01923
Tel: (800)933-8256

Notes:

1. Follow the manufacturer's instructions and safety guidelines.
2. We are not liable for any failures with the adhesives above.

GENERAL DATA

DIMENSIONS/TOLERANCES

All dimensions are in inches (unless otherwise specified).

Tolerances: .xx = .030, .xxx = .010 (unless otherwise specified).

MATERIALS

Unless otherwise noted, materials are: Stainless Steel, 303 series; Carbon Steel, 1144 or 1215 series; Aluminum, 2024-T351/ T4, or 6061-T6; and Brass, 360 Series.

FINISHES

Typical finishes include cadmium plate, zinc plate, chem-film, anodize and passivation. Special finishes are available upon request.

HOW TO ORDER

When ordering use part numbers as shown. For modifications, additional sizes, or other parts, contact our office for correct part number.

US & CANADA PAYMENT TERMS

All payments are due NET 30 DAYS from date of invoice, with approved credit.

CREDIT CARDS ARE ACCEPTED. There is a 3% charge on all Credit card orders.

THERE IS A 1.5% CARRYING CHARGE ON PAST DUE ACCOUNTS.

\$200 MINIMUM ORDER ON STOCK ITEMS.

US & CANADA SHIPPING TERMS

F.O.B. ORIGIN OR FREIGHT COLLECT. Standard courier is UPS unless customer specifies alternate.

There is a minimum 15% RE-STOCKING fee on all returned parts. A RMA number is required for all returns. Returns accepted only at Witten Company's approval within 120 days of shipment.

Custom parts are non-cancellable, non-returnable. All returns are issued as a credit toward your next purchase.

INTERNATIONAL PAYMENT/SHIPPING TERMS

\$500 Minimum

Prepaid Credit Card only.

Ship only UPS or FEDEX and Account number is required

No COD

WITTEN COMPANY, INC.

918-272-9567

Our inventory can be found on PartsBase

